

RF AMPLIFIER

MODEL *TM6345*

Available as: TM6345, 4 Pin TO-8 (T4)
 TN6345, 4 Pin Surface Mount (SM3)
 FP6345, 4 Pin Flatpack (FP4)
 BX6345, Connectorized Housing (H1)

Features

- Low Noise Figure: 2.5 dB Typical
- Output Power: +17 dBm Typical
- Operating Temp. -55 °C to +85 °C
- Environmental Screening Available

Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +54 dBm (Typ.)
 Second Order Two Tone Intercept Point +46 dBm (Typ.)
 Third Order Two Tone Intercept Point +33 dBm (Typ.)

Specifications


CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 1100 MHz	10 - 1100 MHz
Gain (dB)	12.3	10.5 Min.
Power @ 1 dB Comp. (dBm)	+17	+15.0 Min.
Reverse Isolation (dB)	-13.5	-12.0 Max.
VSWR In	1.5:1	2.0:1 Max.
Out	2.0:1	3.0:1 Max.
Noise figure (dB)	2.5	4.0 Max.
Power Vdc	+15	+15
mA	45	48 Max.

Note: Care should always be taken to effectively ground the case of each unit.

Maximum Ratings

Ambient Operating Temperature -55°C to +100 °C
 Storage Temperature -62°C to +125 °C
 Case Temperature +125 °C
 DC Voltage +18 Volts
 Continuous RF Input Power +13 dBm
 Short Term RF Input Power..... 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

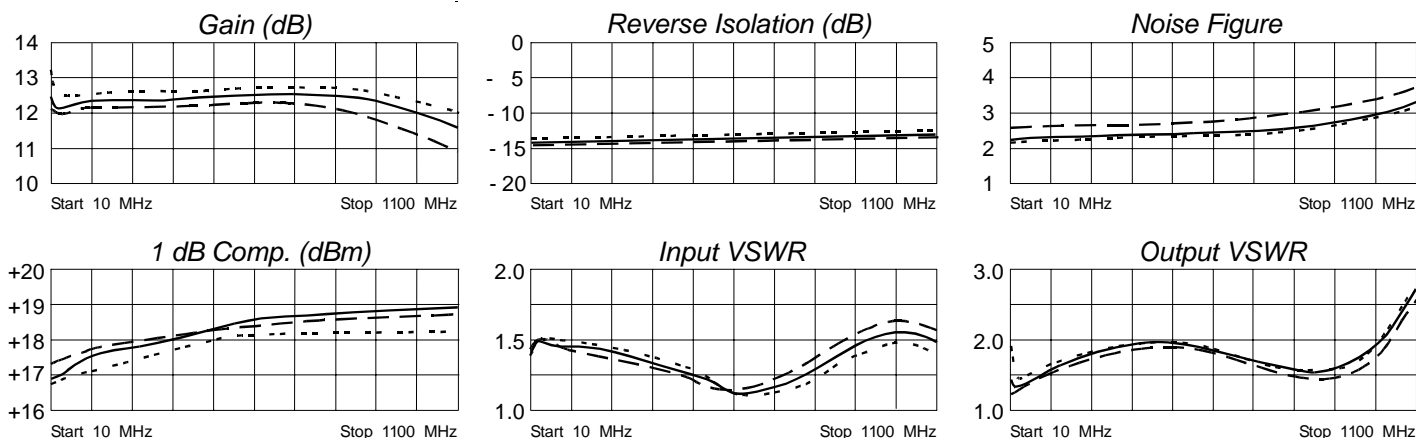

Legend ——— +25 °C - - - +85 °C ····· -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.17	179	4.20	-166	.17	-169	.18	18
100	.18	132	4.14	162	.18	163	.20	9
200	.17	93	4.13	140	.18	144	.24	1
400	.13	26	4.14	99	.18	109	.24	-26
600	.05	-83	4.15	57	.20	73	.20	-53
800	.15	144	4.10	12	.20	36	.13	-111
1100	.19	44	3.73	-61	.21	-23	.24	144



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 10/12/05

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001