

Intensi-fi™



DRAFT-802.11n PRODUCT FAMILY

FEATURES

- First IEEE 802.11n draft-compliant Wi-Fi[®] solution
- BCM4321—MAC/baseband controller for draft-802.11n and 802.11a/b/g devices (PCI/PCI Express[®]/CardBus)
- BCM2055—2x2 dual-band single-chip radio—3x3 and 4x4 antenna options for increased range and performance
- All CMOS implementation of the world's most advanced system architecture for draft-802.11n networks
- Fully backward-compatible with IEEE 802.11a/b/g legacy devices
- Allows cost-effective system design using low-cost PCB and single-sided assembly
- High-performance features across the Intensi-fi[™] product line
- High-performance whole house wireless coverage
- OneDriverTM
- SecureEasySetupTM
- SmartRadio[™]
- WPATM/WPA2TM
- Cisco[®] Compatible Extensions (CCX4)
- Full-rate Advanced Encryption Standard (AES) engine in hardware
- WMMTM for quality of service

SYSTEM/CHIP BENEFITS

Reference Designs

- BCM94321CB2—CardBus reference design
- BCM94321MP—Mini PCI reference design
- BCM94321MC—PCI Express Mini Card reference design
- BCM94704NR—AP/Router reference design
- BCM94705NR—GbE AP/Router reference design
- Two spatially multiplexed streams support data rates up to 270 Mbps.
- Increased rate/range performance enhances user satisfaction while reducing product support calls.
- Self-calibrating architecture allows high-yield board manufacturing.
- 2x2 antenna structure maintains form factor compatibility with high-volume IEEE 802.11a/g industrial designs.
- Low-cost CMOS implementation for MAC, baseband, and radio allows integration with Broadcom's cable/DSL/set-top/ VoIP chipsets.
- OneDriver: Single driver across platforms simplifies driver update process and improves customer satisfaction.
- Designs meet Pb-free/RoHS worldwide requirements.
- SecureEasySetup for simple Wi-Fi setup and security configuration.

APPLICATIONS

- Wireless client cards for desktop and notebook PCs (PCI, PCI Express, Mini Card, Mini PCI, and CardBus form factors)
- High-performance draft-802.11n router solutions with the BCM4704 SoC and BCM4705 SoC
- Home multimedia entertainment wireless networks
- Consumer Wi-Fi devices and other embedded applications requiring high-performance throughput and range

F

OADCOM

Intensi-fi Reference Designs



AP/Router Reference Design

PCI Express Mini Card Reference Design



Mini PCI Reference Design




CardBus Reference Design



OVERVIEW

BCM4321 and BCM2055 AP/Router Block Diagram

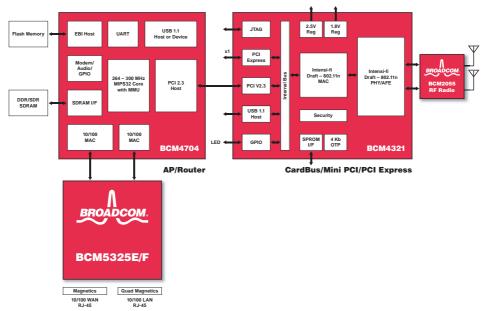


Intensi-fi Specifications

| Interface/System bus support | PCI/CardBus/PCI Express |
|------------------------------|---|
| Standard | IEEE 802.11g, 802.11b, 802.11a, Intensi-fi draft-802.11n |
| Data rate (Mbps) | 54, 48, 36, 24, 18, 12, 9, 6, 11, 5.5, 2, 1 20 MHz BW: 130, 117, 104, 78, 52, 39, 26, 13 40 MHz BW: 270, 243, 216, 162, 108, 81, 54, 27 |
| Modulation | PSK/CCK, DQPSK, DBPSK, OFDM |
| Network architectures | Infrastructure and ad hoc |
| Operating frequencies | 2.4 GHz—2.5 GHz, 4.9 GHz—5.85 GHz |
| Operating channels | 2.4 GHz: 11 for North America, 13 for Europe, and 14 for Japan 5 GHz: 12 for North America, 19 for Europe, and 4 for Japan |
| RF output power | 2x2: 2.4 GHz 16 dBm ±1.5 dB, 5 GHz 14.5 dBm ±1.5 dB |
| Antenna connectors | Two or more antennas for simultaneous transmission and reception |
| Power requirements | 1.8V (3.3V for reference designs) |
| Power consumption | Average standby <130 mW |
| Security | IEEE 802.1x, WEP/WEP2, WPA/WPA2, TKIP, Weak-key avoidance, CCX, CCX 2.0, CCX 3.0, CCX4.0, 128-bit OCB mode AES, IEEE 802.11i |
| Software support | Microsoft [®] Vista, Windows [®] XP, Windows [®] 2000, Linux [®] , VxWorks [®] |
| Certifications | Worldwide regulatory, Wi-Fi 802.11a/b/g, WHQL, CCX |

ORDERING INFORMATION

| BCM94321CB2 | 2.4-GHz Intensi-fi draft-802.11n CardBus reference design |
|-------------|---|
| BCM94321MP | 2.4/5-GHz Intensi-fi draft-802.11n Mini PCI reference design |
| BCM94321MC | 2.4/5-GHz Intensi-fi draft-802.11n PCI Express Mini Card reference design |
| BCM94704NR | 2.4/5-GHz Intensi-fi draft-802.11n AP/Router reference design |
| BCM94705NR | 2.4/5-GHz Intensi-fi draft-802.11n GbE AP/Router reference design |

Broadcom®, the pulse logo, Connecting everything®, the Connecting everything logo, Intensi-fiTM, SecureEasySetupTM, SmartRadioTM, and OneDriverTM are among the trademarks of Broadcom Corporation and/or its affiliates in the United States, certain other countries and/or the EU. Any other trademarks or trade names mentioned are the property of their respective owners.



BROADCOM CORPORATION 16215 Alton Parkway, P.O. Box 57013 Irvine, California 92619-7013 © 2007 by BROADCOM CORPORATION. All rights reserved.



Phone: 949-450-8700 Fax: 949-926-5203 E-mail: info@broadcom.com Web: www.broadcom.com