



Features


- ◇ For IF SAW filter
- ◇ High attenuation
- ◇ Single-ended operation
- ◇ Dual In-line Package
- ◇ RoHS compliant (2002/95/EC), Pb-free

Specifications


Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	75	-
Insertion Loss	dB	-	8.7	10
1 dB Bandwidth	MHz	-	0.18	-
2 dB Bandwidth	MHz	0.15	0.22	-
3 dB Bandwidth	MHz	0.2	0.25	-
30 dB Bandwidth	MHz	-	0.56	0.6
40 dB Bandwidth	MHz	-	0.69	-
Passband Variation	dB	-	0.1	1
Absolute Delay	usec	-	3.48	-
Ultimate Rejection	dB	40	43	-
Material Temperature coefficient	KHz/°C	0.075		
Substrate Material	-	Qz		
Ambient Temperature	°C	25		
Operating Temperature Range	°C	-40	-	+85
Storage Temperature Range	°C	-45	-	+105
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1C		
Package Size	DIP2212 (22.2x12.8x4.7mm3)			

Notes:

1. All specifications are based on the test circuit shown;
2. In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
4. This is the optimum impedance in order to achieve the performance show.

	SIPAT Co., Ltd. (CETC No.26 Research Institute) #14 Nanping Huayuan Road, Chongqing, China, 400060	Part Number	LBS07507	
		Rev. Date	2009-06-19	
		Ver.	1.0	Page


Matching Configuration

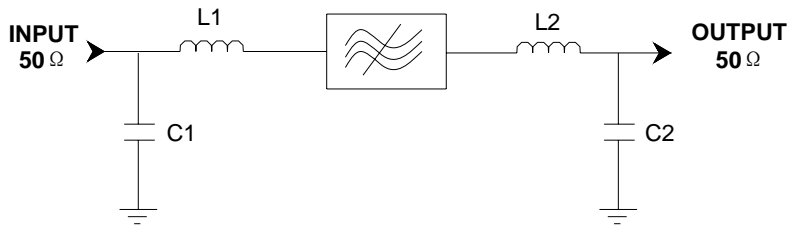

L1=220nH L2=33nH
C1=C2=47pF
Source/Load Impedance=50 ohm

Notes - Component values may change depending
on board layout.

Package Dimension

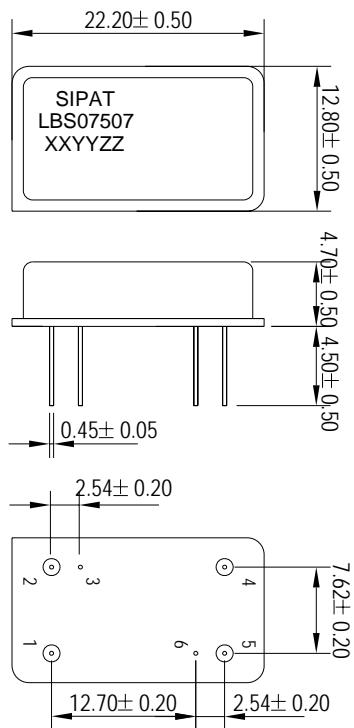

Pad Configuration:

Input 1
Output 5
Ground All Others

Marking Configuration:

- 1) SIPAT: Manufacturer Name
- 2) LBS07507: Part Number
- 3) XXYY: Date(Year/month)
- 4) ZZ: Identified Code

Package: DIP2212

Unit: mm




SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBS07507	
Rev. Date	2009-06-19	
Ver.	1.0	Page 2/3


Typical Performance

Frequency Respond

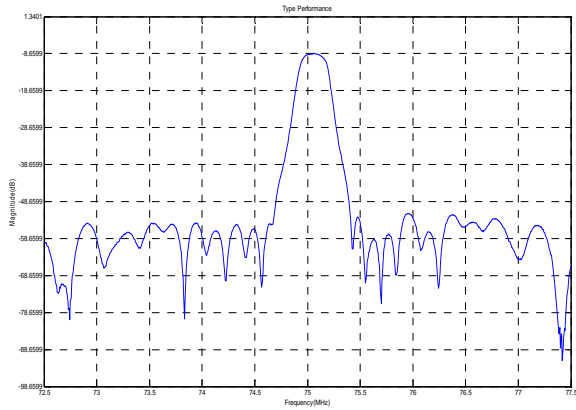


Horizontal: 0.5MHz/Div Vertical: 10dB/Div

Passband Respond

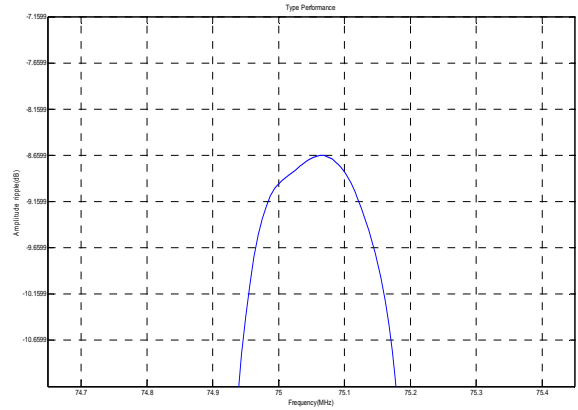


Horizontal: 0.1MHz/Div Vertical: 0.5dB/Div

Group Delay Variation(f0±0.1MHz)

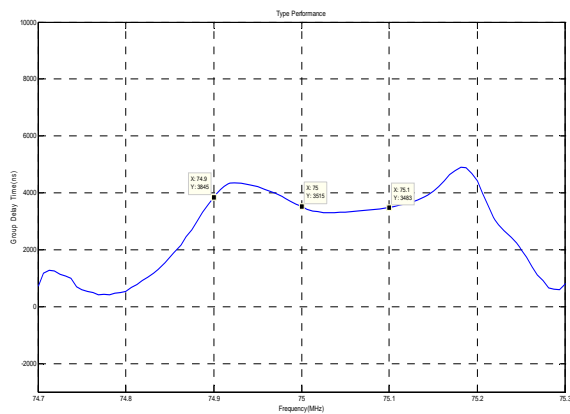


Horizontal: 0.1MHz/Div Vertical: 2000ns/Div

Phase Linearity(f0±0.1MHz)

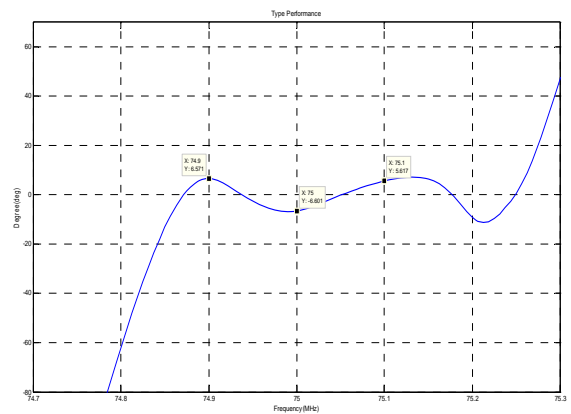


Horizontal: 0.1MHz/Div Vertical: 20deg/Div

Smith Chart S11

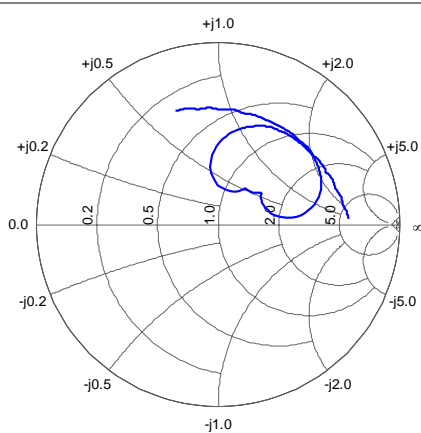

Smith Chart S22

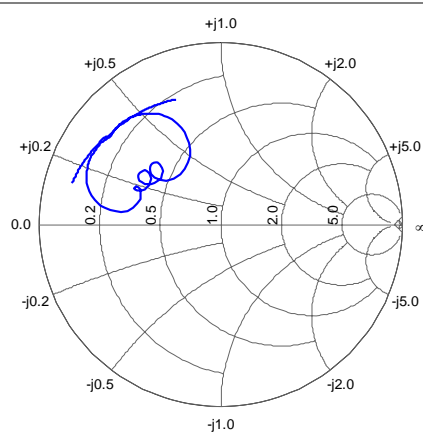

SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBS07507	
Rev. Date	2009-06-19	
Ver.	1.0	Page 3/3