

Absolute maximum ratings

($T_a=25^\circ\text{C}$)


Symbol	Ratings	Unit
V_{DSS}	-60	V
V_{GSS}	± 20	V
I_D	± 5	A
$I_D(\text{pulse})$	± 10 ($PW \leq 1\text{ms}$)	A
P_T	5 ($T_a=25^\circ\text{C}$, with all circuits operating, without heatsink)	W
	35 ($T_c=25^\circ\text{C}$, with all circuits operating, with infinite heatsink)	W
θ_{j-a}	25 (Junction-Air, $T_a=25^\circ\text{C}$, with all circuits operating)	$^\circ\text{C/W}$
θ_{j-c}	3.57 (Junction-Case, $T_c=25^\circ\text{C}$, with all circuits operating)	$^\circ\text{C/W}$
V_{ISO}	1000 (Between fin and lead pin, AC)	Vrms
T_{ch}	150	$^\circ\text{C}$
T_{stg}	-40 to +150	$^\circ\text{C}$

Electrical characteristics

($T_a=25^\circ\text{C}$)


Symbol	Specification			Unit	Conditions
	min	typ	max		
$V_{(BR)DSS}$	-60			V	$I_D=-250\mu\text{A}$, $V_{GS}=0\text{V}$
I_{GSS}			± 500	nA	$V_{DS}=\pm 20\text{V}$
I_{DSS}			-250	μA	$V_{DS}=-60\text{V}$, $V_{GS}=0\text{V}$
V_{TH}	-2.0		-4.0	V	$V_{DS}=-10\text{V}$, $I_D=-250\mu\text{A}$
$R_{e(yfs)}$	2.3	3.5		S	$V_{DS}=-10\text{V}$, $I_D=-5\text{A}$
$R_{DS(ON)}$		0.22	0.30	Ω	$V_{GS}=-10\text{V}$, $I_D=-5\text{A}$
C_{iss}		570		pF	$V_{DS}=-25\text{V}$, $f=1.0\text{MHz}$, $V_{GS}=0\text{V}$
C_{oss}		360		pF	$V_{GS}=0\text{V}$
t_{on}		100		ns	$I_D=-5\text{A}$, $V_{DD}=-30\text{V}$, $V_{GS}=-10\text{V}$, see Fig. 3 on page 16.
t_{off}		60		ns	
V_{SD}		-4.5	-5.5	V	$I_{SD}=-5\text{A}$
t_{rr}		150		ns	$I_{SD}=\pm 100\text{mA}$

Equivalent circuit diagram

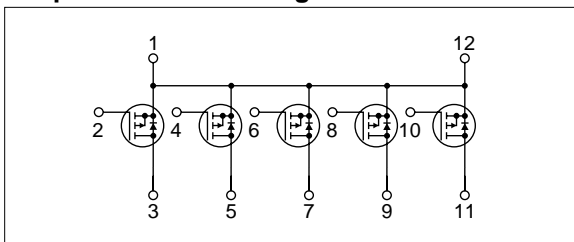


Characteristic curves


I_D - V_{DS} Characteristics (Typical)

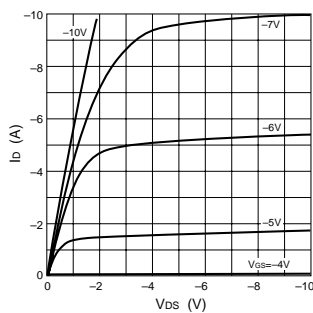


I_D - V_{GS} Characteristics (Typical)

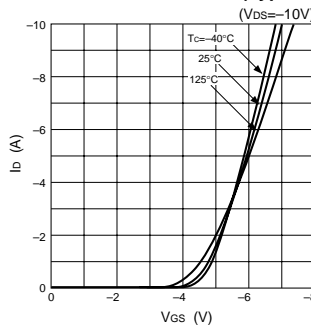


$R_{DS(ON)}$ - I_D Characteristics (Typical)

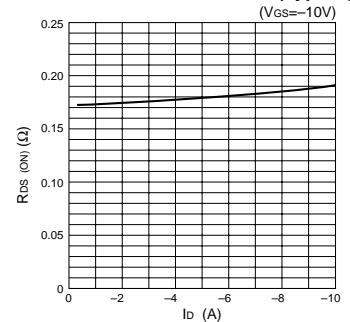


$R_{e(yfs)}$ - I_D Characteristics (Typical)

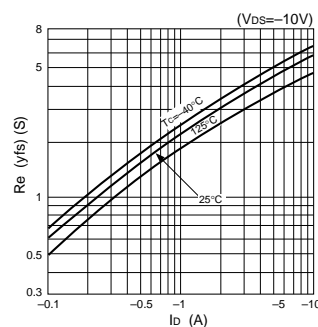


$R_{DS(ON)}$ - T_c Characteristics (Typical)

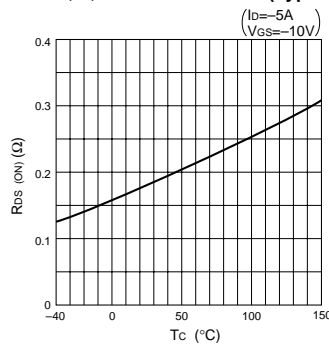


Capacitance- V_{DS} Characteristics (Typical)

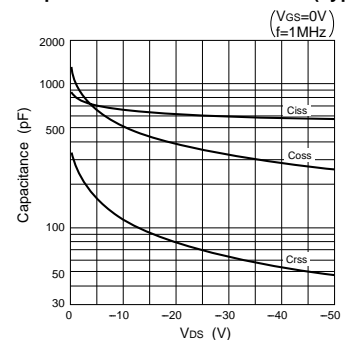

I_{DR} - V_{SD} Characteristics (Typical)

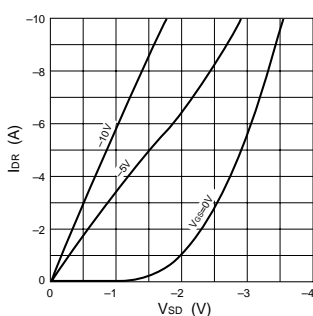

Safe Operating Area (SOA)

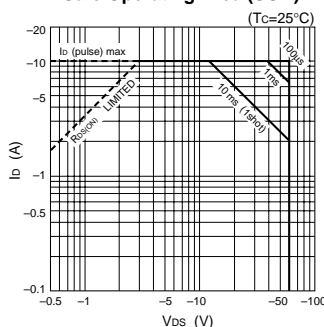

P_T - T_a Characteristics

