



Fig. 1

- Series 870 use MM #3790-0 pins. See page 176 for details.
- Series 871 use MM #1805 receptacles and accept pin diameters from .015" - .025". See page 140 for details.
- Receptacles use Hi-Rel, 6 finger BeCu #43 contact rated at 3 amps. See page 220 for details.
- Insulators are high temp. thermoplastic.



Ordering Information

Series 870...20-001 Right Angle Pin Header

Fig. 1

870-10-0__-20-001000

Specify # of pins \rightarrow 02-21

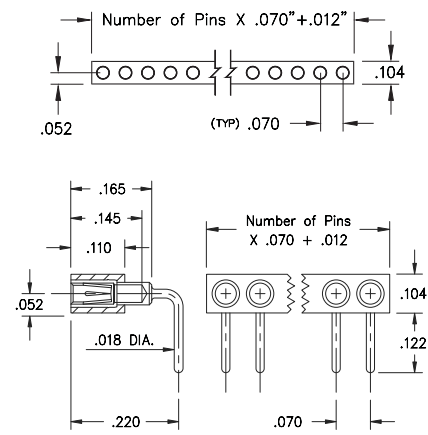


Fig. 2

For Electrical, Mechanical & Environmental Data, See pg. 4
XX=Plating Code See Below
For RoHS compliance select \diamond plating code.

SPECIFY PLATING CODE XX=	10 \diamond			
Pin Plating	10 μ " Au			

Series 871...20-001 Right Angle Socket

Fig. 2

871-43-0__-20-001000

Specify # of pins \rightarrow 02-21

For Electrical, Mechanical & Environmental Data, See pg. 4
XX=Plating Code See Below
For RoHS compliance select \diamond plating code.

PLATING CODE =					43 \diamond
Sleeve (Pin)					200 μ " Sn
Contact (Clip)					30 μ " Au