


Genuine Aircraft Hardware Co.

Socket Head Cap Screws

NAS1351 (Fine) and NAS1352(Coarse)

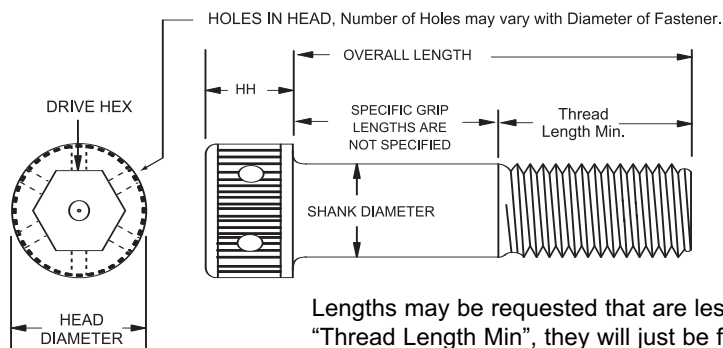

Lengths may be requested that are less than "Thread Length Min", they will just be fully threaded

HELP WITH THE SELECTION OF PART NUMBERS

The four numbers after "NAS" denote "Fine" or "Course" Threads

Then to designate material add a (-) for Alloy Steel 180KSI, or a (**C**) for Corrosion Resistant Steel (18-8) 80KSI, or an (**N**) 140-160KSI for Heat Resisting Steel per AMS5731 or 5737 (A286).

After the (- , **C**, or **N**) for material, place the **Diameter Designation** for your desired Shank Diameter that corresponds with your desired **Thread Size**.

Features for rotational security.

- (**H**) for Drilled Head, or
- (**LE**) for self locking element *any type*
- (**LL**) for self locking element *Strip Type*
- (**LN**) for self locking element *Pellet Type*
- (**LB**) for self locking element *Patch Type*

After all that but before the Length add **Features** if desired. After features (if any) then the Overall Length is stated in 1/16ths of an inch. The last designation is for **plating or finish**.

P= Cadmium II Plating Type 2, class 2, All materials

S= Silver Flashed for (**C**) and (**N**) materials.

No Suffix = Black oxide for (Alloy Steel) and Passivated for (**C**) and (**N**) Materials

Example of Part Number: NAS1351-4H14

Socket Head Cap Screw, 1/4-28 Threads, Alloy Steel, Holes in Head , 7/8" Overall Length, Black Oxide Coated.

Thread Sizes		Diameter Designation	Shank Diameter	Head Diameter	"HH" Head Height	Thread Length "Min"
NAS1351 Fine	NAS1352 Coarse					
#4-56	#4-40	04	.1075 -.1120	.176 -.183	7/64	3/4"
#6-40	#6-32	06	.1329 -.1380	.218 -.226	9/64	
#8-36	#8-32	08	.1585 -.1640	.262 -.270	5/32	7/8"
#10-32	#10-24	3	.1840 -.1900	.303 -.312	3/16	
1/4-28	1/4-20	4	.2435 -.2500	.365 -.375	1/4	1"
5/16-24	5/16-18	5	.3053 -.3125	.457 -.469	5/16	1 1/8"
3/8-24	3/8-16	6	.3678 -.3750	.550 -.562	3/8	1 1/4"
7/16-20	7/16-14	7	.4294 -.4375	.642 -.656	7/16	1 3/8"
1/2-20	1/2-13	8	.4919 -.5000	.735 -.750	1/2	1 1/2"