

**GFMB6**  
FM US Band

Inquiry

**Application**

for Spurious reduction

**Characteristics**


GFMB6(Bulk Type)	
GFMB6-T(Taping Type)	
Zin/Zout	75 ohm Nominal
Pass Band	88 up to 108MHz
Insertion Loss	3dB max (88 up to 108MHz)
Attenuation	20 dB min (0 up to 50MHz)
	20 dB min (170 up to 230MHz)

**Number of ordered pieces**


4000pcs/Box

**Dimensions**

Dimension (Unit : mm)

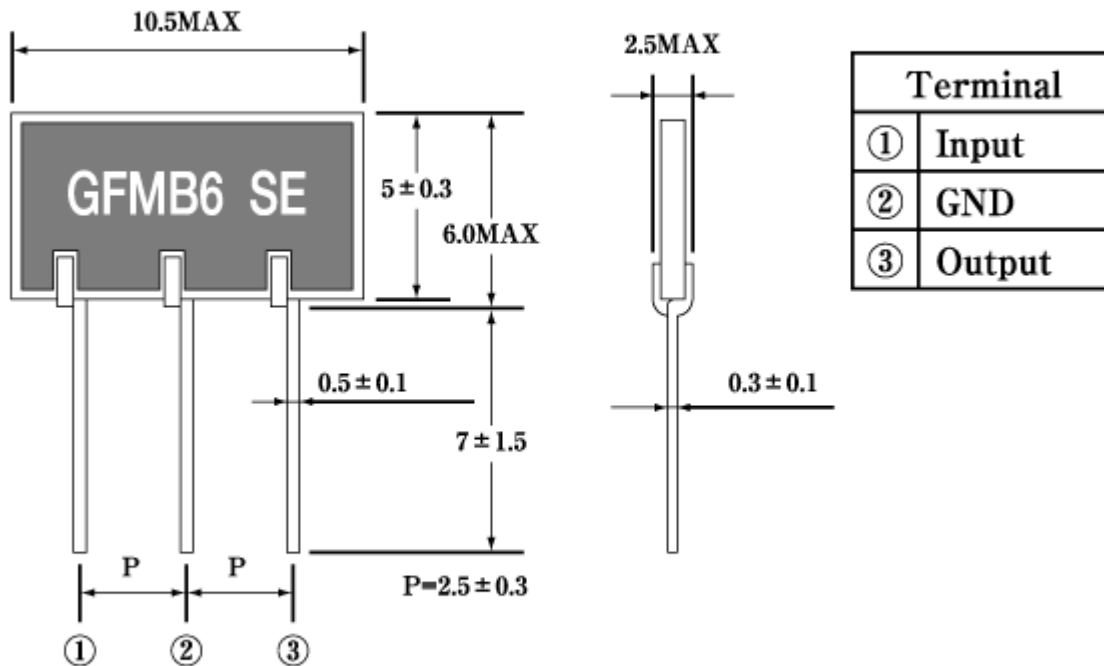

**Frequency Data**

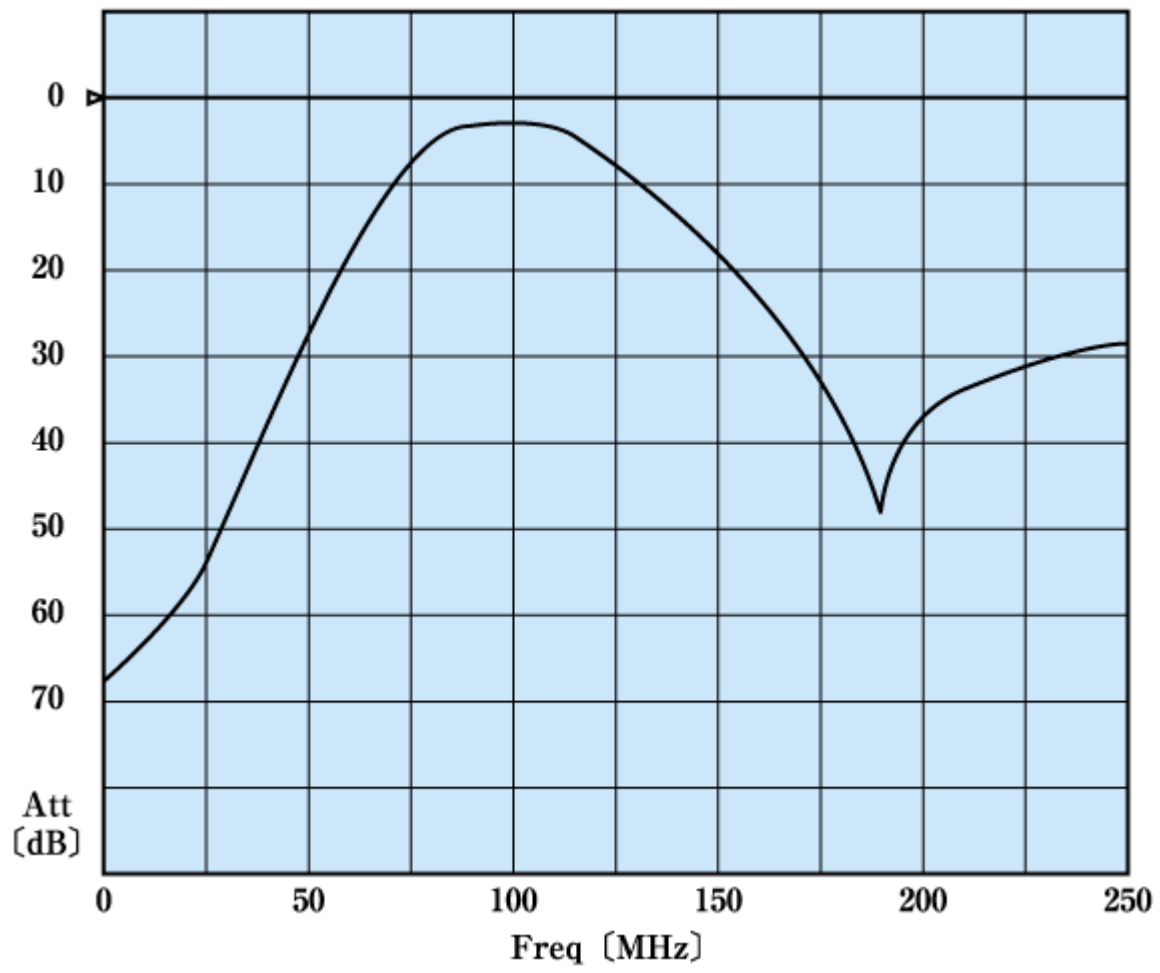

► Products li