Pomona®

Model 2952
Adapter – Standard Double Banana Jack To Miniature Double Banana Plug

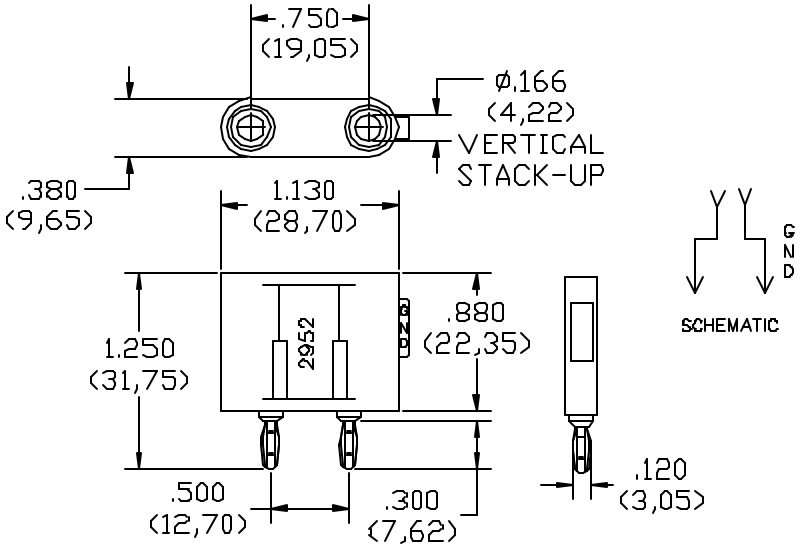

FEATURES:

- Permits Standard Double Banana Plug on 19.1 (.750) centers to be used with equipment having Miniature Double Jacks on 12.7 (.500) centers.

MATERIALS:

Upper Conn: Standard Double Banana Jack
- Material: Brass per QQ-B-626, Alloy 360, ½ Hard.
- Finish: Nickel plate per QQ-N-290, Class 2, (.00002/.0003).
- Insulation: ABS molded to Banana Jacks and Banana Plug Bodies.
- Color: Black.
- Marking: "POMONA 2952."

Lower Conn: Miniature Double Banana Plug
- Material: Spring – Beryllium Copper per QQ-C-533, Alloy 172, Cond. H.T.
- Plug Body: Same as above.
- Finish: Nickel plate per QQ-N-290.

RATINGS:

Operating Temperature: +50º C (+122º F) Max.
Operating Voltage: 2500 VDC.
Current: 5 Amperes

ORDERING INFORMATION: Model 2952

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (,51 mm), .xxx = ± .005" (,127 mm).
All specifications are to the latest revisions. Specifications are subject to change without notice.
Registered trademarks are the property of their respective companies. Made in USA

Sales: 800-490-2361 Fax: 888-403-3360
Technical Assistance: 800-241-2060

Pomona*ACCESS* **90563** (800) 444-6785 or (425) 446-6010
More drawings available at www.pomonaelectronics.com