

Operational Amplifiers

A general purpose operational amplifier that allows the user to choose the compensation capacitor best suited to his needs. With proper compensation, summing amplifier slew rates to 10 V/ μ s can be obtained.

- Low Input Offset Current: 20 nA Maximum Over Temperature Range
- External Frequency Compensation for Flexibility
- Class AB Output Provides Excellent Linearity
- Output Short Circuit Protection
- Guaranteed Drift Characteristics

Figure 1. Standard Compensation and Offset Balancing Circuit

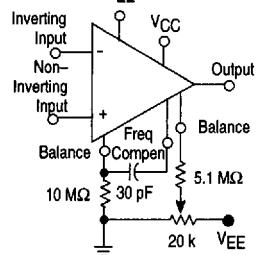
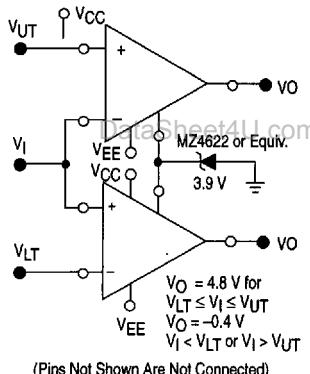
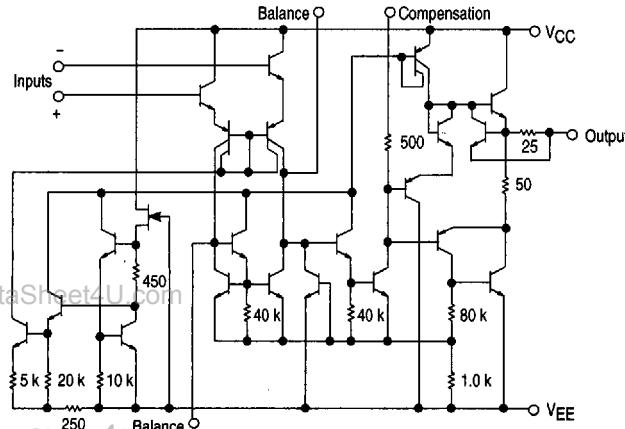


Figure 2. Double-Ended Limit Detector



(Pins Not Shown Are Not Connected)

Figure 3. Representative Circuit Schematic



LM301A LM201A

OPERATIONAL AMPLIFIERS

SEMICONDUCTOR TECHNICAL DATA

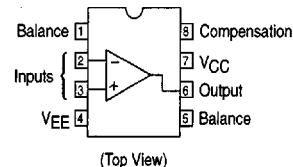


N SUFFIX
PLASTIC PACKAGE
CASE 626



D SUFFIX
PLASTIC PACKAGE
CASE 751
(SO-8)

PIN CONNECTIONS



ORDERING INFORMATION

www.DataSheet4U.com

Device	Operating Temperature Range	Package
LM301AD LM301AN	$T_A = 0^\circ \text{ to } +70^\circ\text{C}$	SO-8 Plastic DIP
LM201AD LM201AN	$T_A = -25^\circ \text{ to } +85^\circ\text{C}$	SO-8 Plastic DIP

MAXIMUM RATINGS

Rating	Symbol	Value		Unit
		LM201A	LM301A	
Power Supply Voltage	V _{CC} , V _{EE}	±22	±18	Vdc
Input Differential Voltage	V _{ID}	±30		V
Input Common Mode Range (Note 1)	V _{ICR}	±15		V
Output Short Circuit Duration	t _{SC}	Continuous		
Power Dissipation (Package Limitation) Plastic Dual-In-Line Package (LM201A/ Derate above T _A = +25°C 301A)	P _D	625 5.0	625 5.0	mW mW/C
Operating Ambient Temperature Range	T _A	-25 to +85	0 to +70	°C
Storage Temperature Range	T _{stg}	−65 to +150		°C

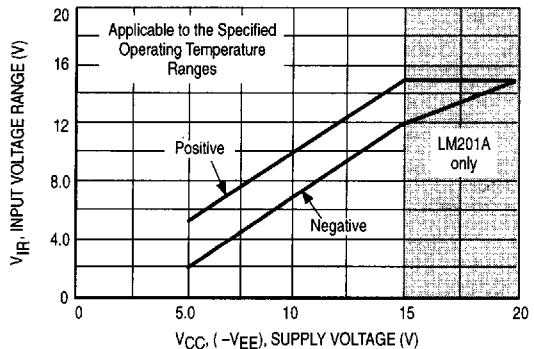
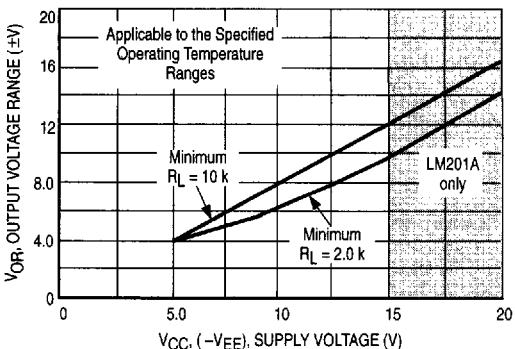
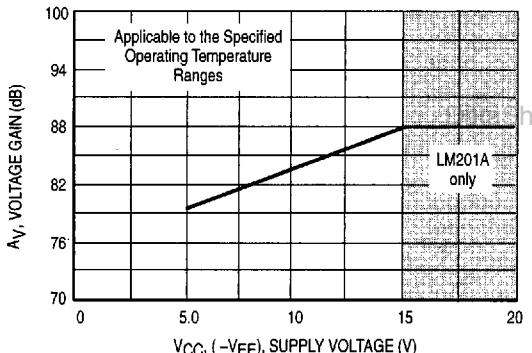
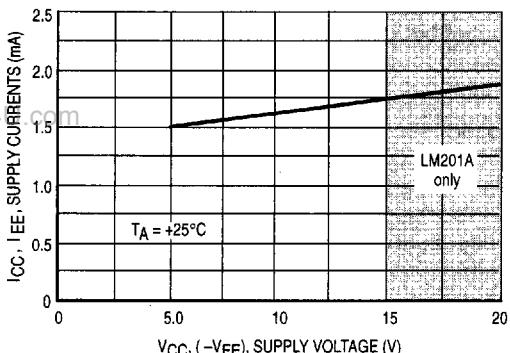
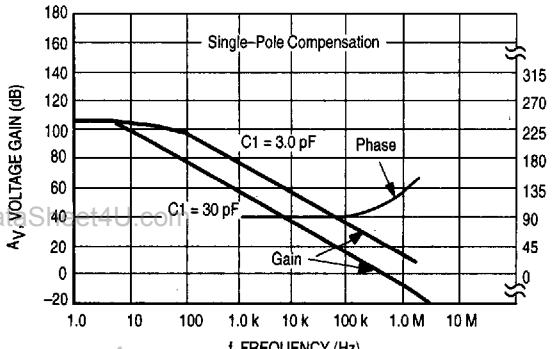
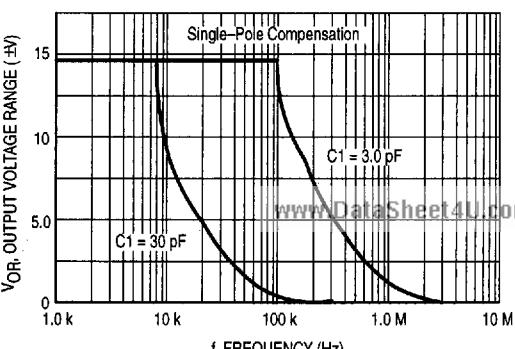
NOTE: 1. For supply voltages less than ±15 V, the absolute maximum input voltage is equal to the supply voltage.

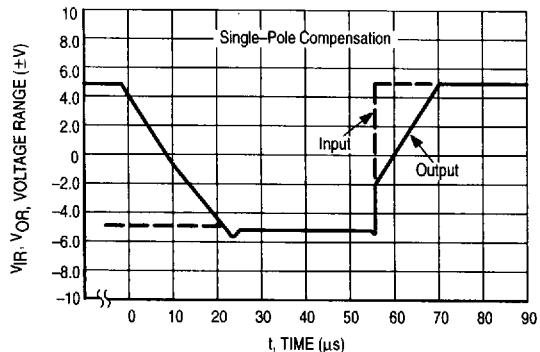
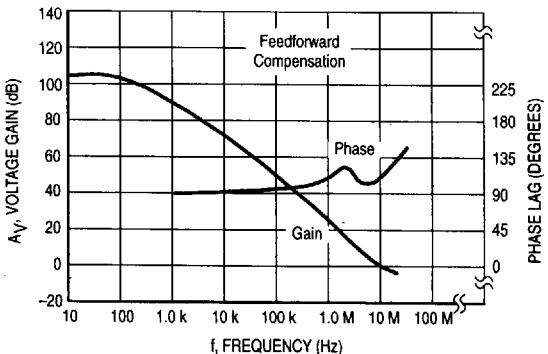
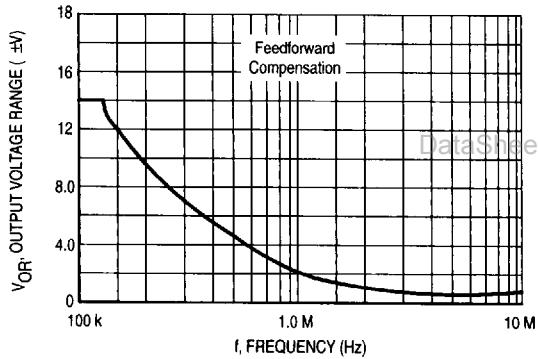
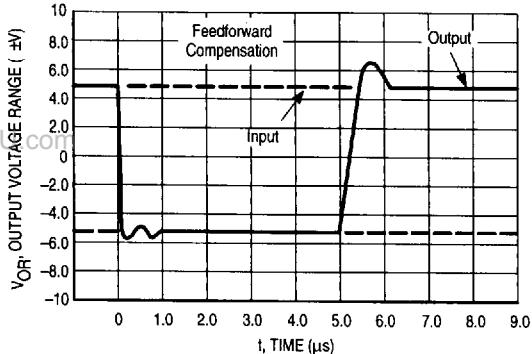
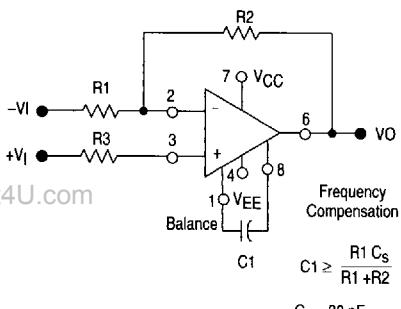
ELECTRICAL CHARACTERISTICS (T_A = +25°C, unless otherwise noted.) Unless otherwise specified, these specifications apply for supply voltages from ±5.0 V to ±20 V for the LM201A, and from ±5.0 V to ±15 V for the LM301A.

Characteristic	Symbol	LM201A			LM301A			Unit
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage (R _S ≤ 50 kΩ)	V _{IO}	—	0.7	2.0	—	2.0	7.5	mV
Input Offset Current	I _{IO}	—	1.5	10	—	3.0	50	nA
Input Bias Current	I _{IB}	—	30	75	—	70	250	nA
Input Resistance	r _i	1.5	4.0	—	0.5	2.0	—	MΩ
Supply Current V _{CC} /V _{EE} = ±20 V V _{CC} /V _{EE} = ±15 V	I _{CC} , I _{EE}	—	1.8	3.0	—	—	—	mA
Large Signal Voltage Gain (V _{CC} /V _{EE} = ±15 V, V _O = ±10 V, R _L > 2.0 kΩ)	A _V	50	160	—	25	160	—	V/mV

The following specifications apply over the operating temperature range.

Input Offset Voltage (R _S ≤ 50 kΩ)	V _{IO}	—	—	3.0	—	—	10	mV
Input Offset Current	I _{IO}	—	—	20	—	—	70	nA
Avg Temperature Coefficient of Input Offset Voltage T _A (min) ≤ T _A ≤ T _A (max)	ΔV _{IO} /ΔT	—	3.0	15	—	6.0	30	μV/°C
Avg Temperature Coefficient of Input Offset Current +25°C ≤ T _A ≤ T _A (max) T _A (min) ≤ T _A ≤ 25°C	ΔI _{IO} /ΔT	— —	0.01 0.02	0.1 0.2	— —	0.01 0.02	0.3 0.6	nA/°C
Input Bias Current	I _{IB}	—	—	100	—	—	300	nA
Large Signal Voltage Gain (V _{CC} /V _{EE} = ±15 V, V _O = ±10V, R _L > 2.0 kΩ)	A _{VOL}	25	—	—	15	—	—	V/mV
Input Voltage Range V _{CC} /V _{EE} = ±20 V V _{CC} /V _{EE} = ±15 V	V _{ICR}	-15 —	— —	+15 —	— -12	— —	— +12	V
Common Mode Rejection (R _S ≤ 50 kΩ)	CMR	80	96	—	70	90	—	dB
Supply Voltage Rejection (R _S ≤ 50 kΩ)	PSR	80	96	—	70	96	—	dB
Output Voltage Swing (V _{CC} /V _{EE} = ±15 V, R _L = ±10 kΩ, R _L > 2.0 kΩ)	V _O	±12 ±10	±14 ±13	—	±12 ±10	±14 ±13	—	V
Supply Currents (T _A = T _A (max), V _{CC} /V _{EE} = ±20 V)	I _{CC} , I _{EE}	—	1.2	2.5	—	—	—	mA

LM301A LM201A**Figure 4. Minimum Input Voltage Range****Figure 5. Minimum Output Voltage Swing****Figure 6. Minimum Voltage Gain****Figure 7. Typical Supply Currents****Figure 8. Open Loop Frequency Response****Figure 9. Large Signal Frequency Response**

LM301A LM201A**Figure 10. Voltage Follower Pulse Response****Figure 11. Open Loop Frequency Response****Figure 12. Large Signal Frequency Response****Figure 13. Inverter Pulse Response****Figure 14. Single-Pole Compensation****Figure 15. Feedforward Compensation**