

REVISIONS																			
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED																
A	Change footnotes in conditions for standby current drain tests. Footnote 1, table I, change input voltage limits. Add case outline U.	92-01-13	<i>M.A. Lye</i>																

REV	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
SHEET																				
REV																				
SHEET																				

REV STATUS OF SHEETS	REV	A	A	A	A	A	A	A	A	A	A	A	A	A
	SHEET	1	2	3	4	5	6	7	8	9	10	11	12	13

PMIC N/A STANDARDIZED MILITARY DRAWING THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE AMSC N/A	PREPARED BY <i>Joseph A. Kerby</i> CHECKED BY <i>Charles E. Beale</i> APPROVED BY <i>M.A. Lye</i>	DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444 MICROCIRCUIT, LINEAR, 8-VOLT POSITIVE REGULATOR FIXED, MONOLITHIC SILICON						
	DRAWING APPROVAL DATE 18 AUGUST 1989 REVISION LEVEL A	<table style="width: 100%;"> <tr> <td style="width: 15%;">SIZE A</td> <td style="width: 35%;">CAGE CODE 67268</td> <td style="width: 50%; text-align: center;">5962-89628</td> </tr> <tr> <td colspan="3" style="text-align: center;">SHEET 1 OF 13</td> </tr> </table>	SIZE A	CAGE CODE 67268	5962-89628	SHEET 1 OF 13		
SIZE A	CAGE CODE 67268	5962-89628						
SHEET 1 OF 13								

DESC FORM 193
SEP 87

• U.S. GOVERNMENT PRINTING OFFICE: 1987 — 748-129/60911

5962-E1724

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

1. SCOPE

1.1 Scope. This drawing describes device requirements for class B microcircuits in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices".

1.2 Part or Identifying number (PIN). The complete PIN shall be as shown in the following example:

5962-89628	01	X	X
Drawing number	Device type (1.2.1)	Case outline (1.2.2)	Lead finish per MIL-M-38510

1.2.1 Device type. The device type shall identify the circuit function as follows:

Device type	Generic number	Circuit function
01	7808A	Positive regulator, fixed 8-volt

1.2.2 Case outlines. The case outlines shall be as designated in appendix C of MIL-M-38510, and as follows:

Outline letter	Case outline
U	See figure 1, TO-257 (3-lead flange mounted case with isolated tab)
X	See figure 1, TO-39 (3-lead can)
Y	See figure 1, TO-3 (2-lead can)
Z	See figure 1, TO-66 (2-lead can)

1.3 Absolute maximum ratings.

Input voltage:	
Operating or output shorted to ground - - - - -	35 V dc
Transient - - - - -	50 V dc ^{1/}
Storage temperature range - - - - -	-65°C to +150°C
Lead temperature (soldering, 10 seconds) - - - - -	+300°C
Power dissipation (P_D):	
$T_C = +25^\circ\text{C}$:	
Case X- - - - -	2 W
Case Y- - - - -	20 W
Cases U and Z - - - - -	15 W
$T_A = +25^\circ\text{C}$:	
Case X- - - - -	1.0 W
Case Y- - - - -	4.3 W
Cases U and Z - - - - -	3.0 W
Thermal resistance, junction-to-case (θ_{JC}):	
Case U - - - - -	4.2°C/W
Case X- - - - -	15°C/W
Case Y- - - - -	3°C/W
Case Z- - - - -	6°C/W

^{1/} The 50-volt input rating refers to the ability of the regulator to withstand high line or transient condition without damage. Since the regulator's maximum current capability is reduced, the output may fall out of regulation at high input voltages under nominal loading.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-89628	
	REVISION LEVEL A		SHEET 2

DESC FORM 193A
SEP 87

U. S. GOVERNMENT PRINTING OFFICE 1088-550-547

Thermal resistance, junction-to-ambient (θ_{JA}):
 Case X- - - - - 120°C/W
 Case Y- - - - - 35°C/W
 Case Z- - - - - 50°C/W
 Junction temperature (T_J) - - - - - +150°C ^{2/}

1.4 Recommended operating conditions.

Ambient operating temperature range (T_A) - - - - - -55°C to +125°C
 Input voltage range - - - - - +11.0 V dc to +25 V dc

2. APPLICABLE DOCUMENTS

2.1 Government specification and standard. Unless otherwise specified, the following specification and standard, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of the specification and standard required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing shall take precedence.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices" and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 2.

3.2.2 Case outlines. The case outlines shall be in accordance with 1.2.2 herein.

3.3 Electrical performance characteristics. Unless otherwise specified, the electrical performance characteristics are as specified in table I and apply over the full ambient operating temperature range.

^{2/} The device is protected by a thermal shutdown circuit which is designed to turn off the output transistor whenever the device junction temperature is in excess of +150°C.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-89628
		REVISION LEVEL A	SHEET 3

DESC FORM 193A
 SEP 87

U. S. GOVERNMENT PRINTING OFFICE 1988-550-547

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions 1/ $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ unless otherwise specified	Group A subgroups	Limits		Unit
				Min	Max	
Output voltage	V_{OUT}	$T_A = +25^{\circ}\text{C}$	1	7.88	8.12	V
		$V_{\text{IN}} = 11.5 \text{ V to } 23 \text{ V}$ 2/	1, 2, 3	7.76	8.24	
Line regulation 3/ 4/	V_{RLINE}	$V_{\text{IN}} = 10.5 \text{ V to } 25 \text{ V}$	1		40	mV
			2, 3		60	
		$V_{\text{IN}} = 11 \text{ V to } 17 \text{ V}$	1		20	
			2, 3		30	
Load regulation 3/	V_{RLOAD}	$I_O = 5.0 \text{ mA to } 1.0 \text{ A}$ 5/	1		70	mV
			2, 3		100	
		$I_O = 250 \text{ mA to } 750 \text{ mA}$ 5/	1		35	
			2, 3		50	
		$I_O = 5 \text{ mA to } 500 \text{ mA}$ 6/	1		35	
			2, 3		50	
Standby current drain	I_{SCD}		1		6.0	mA
			2, 3		6.5	
Standby current drain change with line	delta I_{SCD} (line)	$V_{\text{IN}} = 11.5 \text{ V to } 25 \text{ V}$	1, 2, 3		1.0	mA
Standby current drain change with load	delta I_{SCD} (load)	$I_O = 5.0 \text{ mA to } 1.0 \text{ A}$ 5/	1, 2, 3		0.5	mA
		$I_O = 5.0 \text{ mA to } 500 \text{ mA}$ 6/			0.5	

See footnotes at end of table.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-89628
		REVISION LEVEL A	SHEET 4

DESC FORM 193A
SEP 87

* U. S. GOVERNMENT PRINTING OFFICE 1988-550-547

TABLE 1. Electrical performance characteristics - Continued.

Test	Symbol	Conditions 1/ -55°C ≤ T _A ≤ +125°C unless otherwise specified	Group A subgroups	Limits		Unit
				Min	Max	
Dropout voltage	V _{DO}	delta V _{OUT} = 100 mV	I _O = 1.0 A 5/ I _O = 500 mA 6/	1,2,3	2.5	V
Peak output current	I _{O(pk)}	T _A = +25°C	5/ 6/	1	1.5 3.3 0.5 1.7	A
Short circuit current 7/	I _{OS}	V _{IN} = 35 V	5/ 6/	1 2, 3 1 2, 3	1.2 2.8 0.7 2.0	A
Ripple rejection 3/	delta V _{IN} / delta V _{OUT}	f = 120 Hz, delta V _{IN} = 10 V	4 5, 6 8/	62 60		dB
Output noise voltage 8/	N _O	T _A = +25°C, f = 10 Hz to 100 kHz	7		40	μV/V _{rms}
Long term stability 8/	delta V _{OUT} / delta t	T _A = +25°C, t = 1,000 hrs	7		75	mV

1/ Unless otherwise specified, V_{IN} = 10 V and I_O = 500 mA for cases U, Y and Z, V_{IN} = 10 V and I_O = 100 mA for case X. Maximum test current for case X is 500 mA.

2/ For case X: I_O = 5 mA to 500 mA, P ≤ 2 W. For case Y: I_O = 5 mA to 1.0 A, P ≤ 20 W. For case U and Z: I_O = 5 mA to 1.0 A, P ≤ 15 W.

3/ All measurements except noise voltage and ripple rejection are made at constant junction temperature and with low duty cycle.

4/ Minimum load current for full line regulation is 5.0 mA.

5/ For cases Y and Z only.

6/ For case X only.

7/ Short circuit protection is only assured up to V_{IN} = 35 V.

8/ Guaranteed if not tested.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-89628	
		REVISION LEVEL A	SHEET 5

DESC FORM 193A
SEP 87

U.S. GOVERNMENT PRINTING OFFICE: 1968-550-347

Case outline X

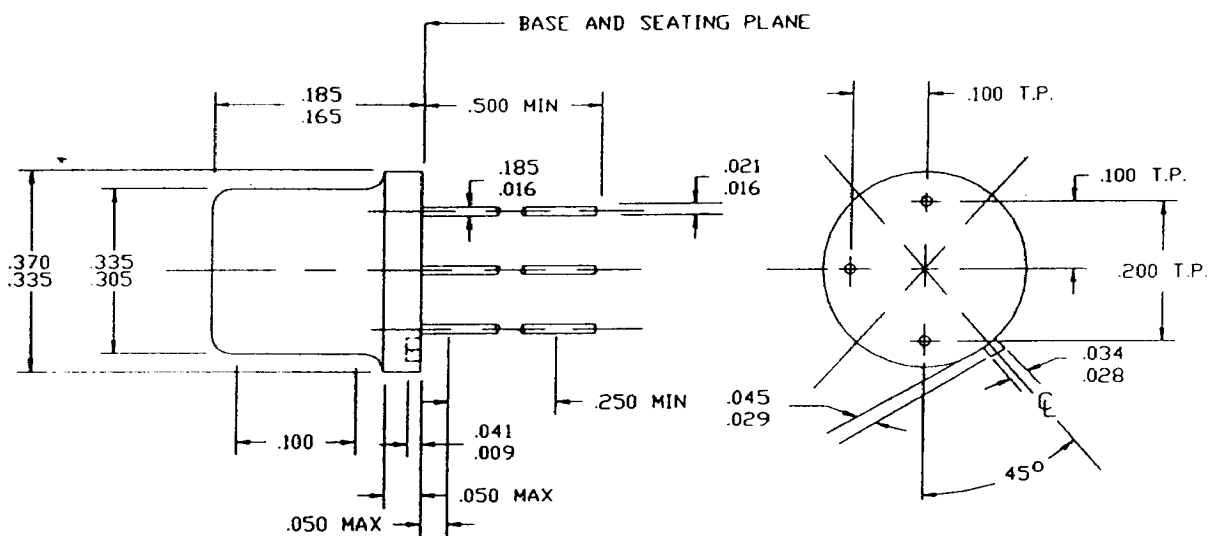


FIGURE 1. Case outlines.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-89628	
		REVISION LEVEL A	SHEET 6

DESC FORM 193A
SEP 87

U S GOVERNMENT PRINTING OFFICE 1988-550-547

Case outline Y

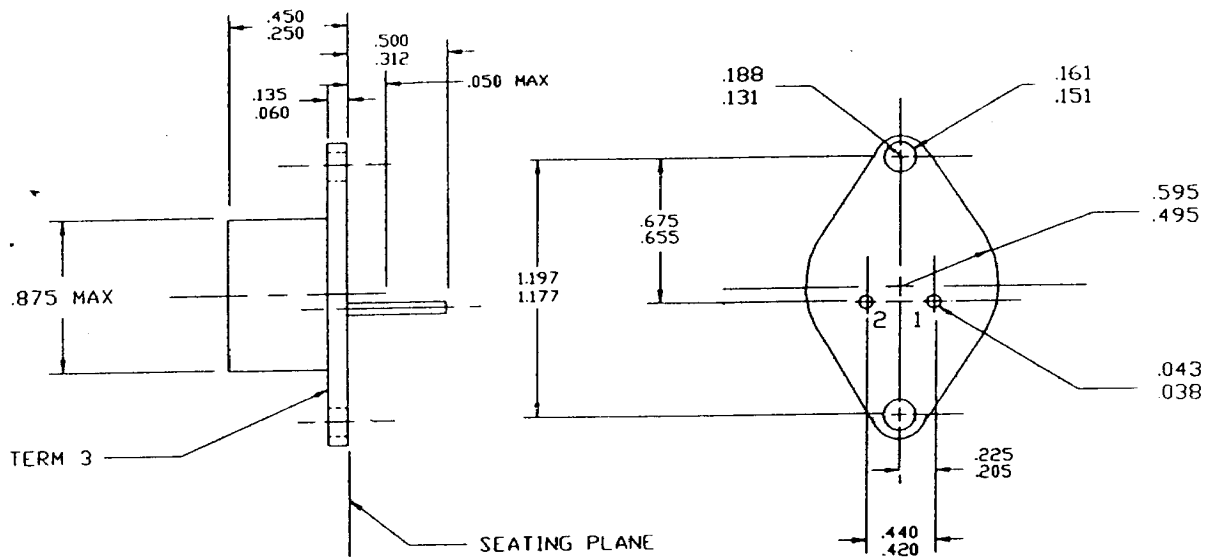


FIGURE 1. Case outlines - Continued.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-89628
		REVISION LEVEL A	SHEET 7

DESC FORM 193A
SEP 87

U S GOVERNMENT PRINTING OFFICE 1986-550-547

Case outline Z

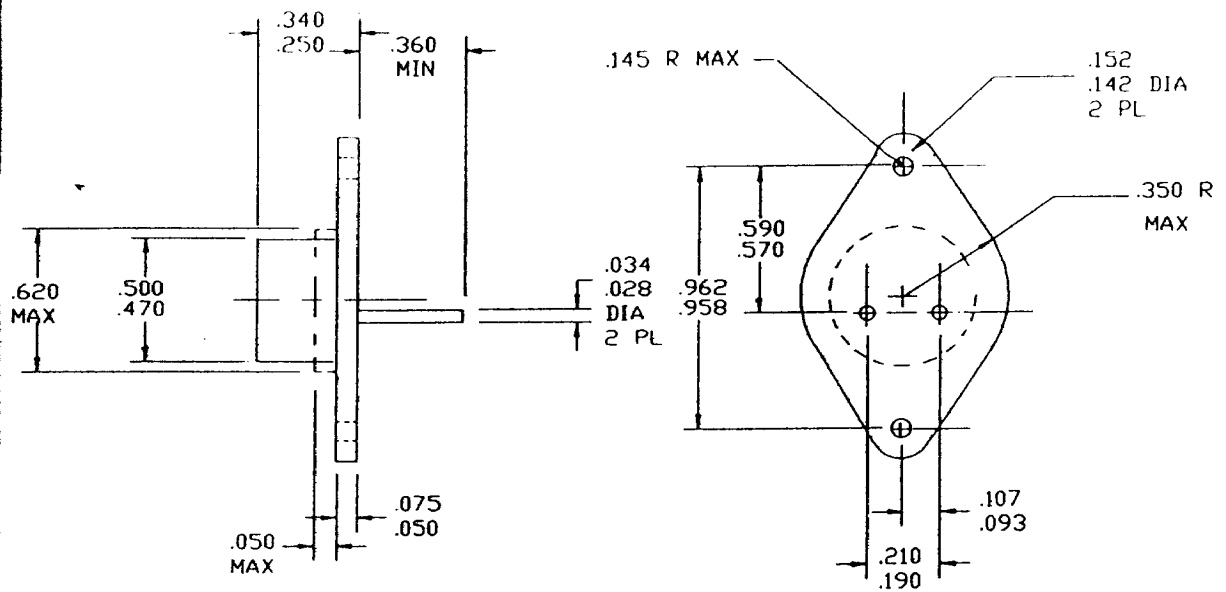



FIGURE 1. Case outlines - Continued.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-89628	
		REVISION LEVEL A	SHEET 8

DESC FORM 193A
SEP 87

U S GOVERNMENT PRINTING OFFICE 1985-550-347

Case outline U

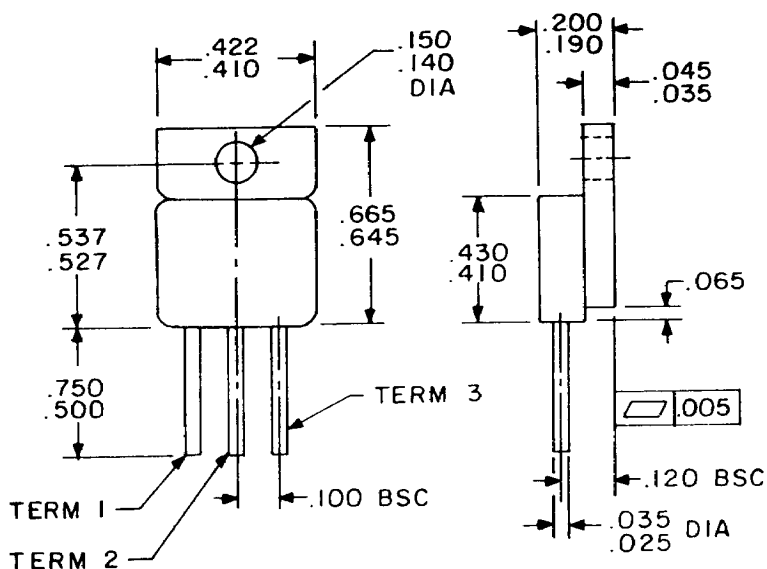

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.100	2.54	.210	5.33	.500	12.70
.009	0.23	.107	2.72	.225	5.72	.527	13.39
.016	0.41	.120	3.05	.250	6.35	.537	13.64
.021	0.53	.131	3.33	.305	7.75	.570	14.48
.025	0.64	.135	3.43	.312	7.92	.590	14.99
.028	0.71	.140	3.56	.335	8.51	.595	15.11
.029	0.74	.142	3.61	.340	8.64	.620	15.75
.034	0.86	.145	3.68	.350	8.89	.645	16.38
.035	0.89	.150	3.81	.360	9.14	.655	16.64
.038	0.97	.151	3.84	.370	9.40	.665	16.89
.041	1.04	.152	3.86	.410	10.19	.675	17.15
.043	1.09	.161	4.09	.420	10.67	.750	19.05
.045	1.14	.165	4.19	.422	10.72	.875	22.23
.050	1.27	.185	4.70	.430	10.92	.958	24.33
.060	1.52	.188	4.78	.440	11.18	.962	25.43
.065	1.65	.190	4.83	.450	11.43	1.117	29.90
.075	1.91	.200	5.08	.470	11.94	1.197	30.40
.093	2.36	.205	5.21	.495	12.57		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

FIGURE 1. Case outlines - Continued.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-89628
		REVISION LEVEL A	SHEET 9

DESC FORM 193A
SEP 87

U S GOVERNMENT PRINTING OFFICE 1988-350-547

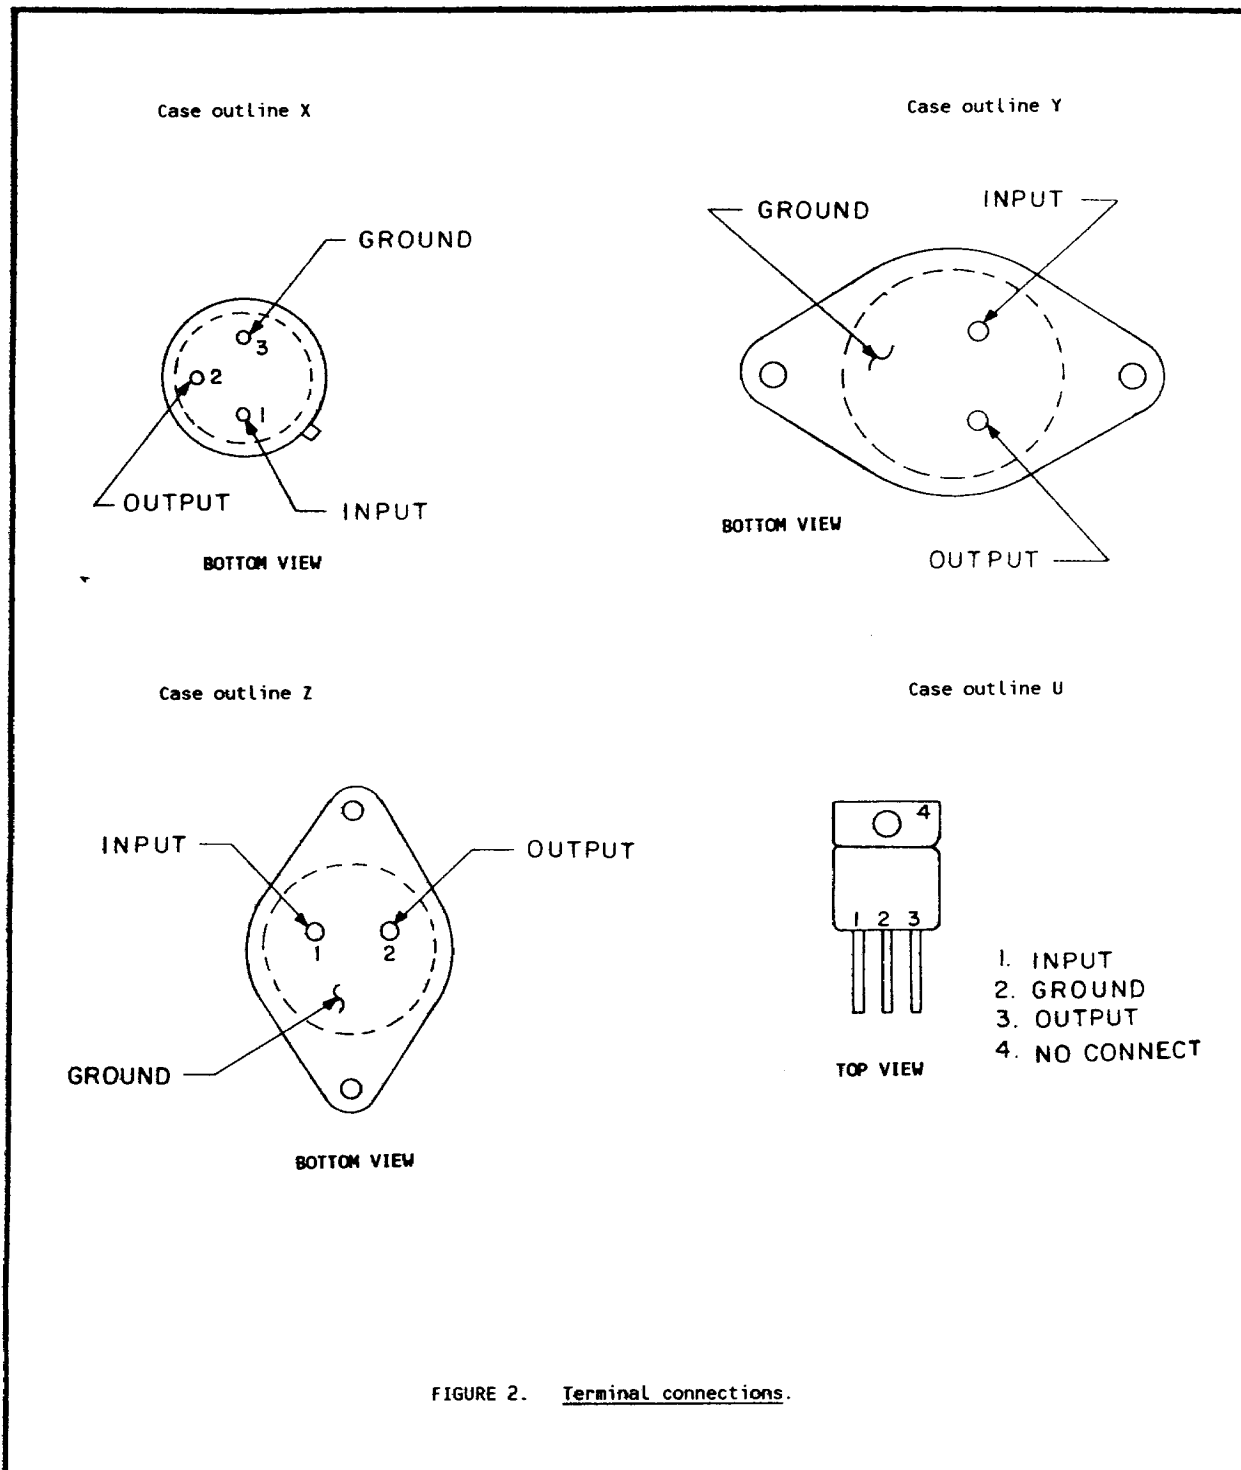


FIGURE 2. Terminal connections.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-89628	
		REVISION LEVEL A	SHEET 10

DESC FORM 193A
SEP 87

U S GOVERNMENT PRINTING OFFICE 1985-550-547

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full ambient operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

3.5 Marking. Marking shall be in accordance with MIL-STD-883 (see 3.1 herein). The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked as listed in MIL-BUL-103 (see 6.6 herein).

3.6 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-BUL-103 (see 6.6 herein). The certificate of compliance submitted to DESC-ECS prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-STD-883 (see 3.1 herein) and the requirements herein.

3.7 Certificate of conformance. A certificate of conformance as required in MIL-STD-883 (see 3.1 herein) shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change. Notification of change to DESC-ECS shall be required in accordance with MIL-STD-883 (see 3.1 herein).

3.9 Verification and review. DESC, DESC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with section 4 of MIL-M-38510 to the extent specified in MIL-STD-883 (see 3.1 herein).

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).

(2) $T_A = +125^{\circ}\text{C}$, minimum.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

4.3.1 Group A inspection.

a. Tests shall be as specified in table II herein.

b. Subgroups 8, 9, 10, and 11 in table I, method 5005 of MIL-STD-883 shall be omitted.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-89628
		REVISION LEVEL A	SHEET 11

DESC FORM 193A
SEP 87

• U S GOVERNMENT PRINTING OFFICE 1988-850-347

4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883.
 - (1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).
 - (2) $T_A = +125^\circ\text{C}$, minimum.
 - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (per method 5005, table I)
Interim electrical parameters (method 5004)	1
Final electrical test parameters (method 5004)	1*, 2, 3, 4
Group A test requirements (method 5005)	1, 2, 3, 4, 5, 6, 7**
Groups C and D end-point electrical parameters (method 5005)	1

- * PDA applies to subgroup 1.
 ** Subgroups 5, 6, and 7 if not tested shall be guaranteed to the limits specified in table I.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-38510, the device specified herein will be inactivated and will not be used for new design. The QPL-38510 product shall be the preferred item for all applications.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-89628	
		REVISION LEVEL A	SHEET 12

DESC FORM 193A
SEP 87

• U S GOVERNMENT PRINTING OFFICE 1988-550-947

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-481 using DD Form 1693, Engineering Change Proposal (Short Form).

6.4 Record of users. Military and industrial users shall inform Defense Electronics Supply Center when a system application requires configuration control and the applicable SMD. DESC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DESC-ECS, telephone (513) 296-6022.

6.5 Comments. Comments on this drawing should be directed to DESC-ECS, Dayton, Ohio 45444, or telephone (513) 296-5375.

6.6 Approved sources of supply. Approved sources of supply are listed in MIL-BUL-103. The vendors listed in MIL-BUL-103 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DESC-ECS.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-89628
		REVISION LEVEL A	SHEET 13

DESC FORM 193A
SEP 87

• U S GOVERNMENT PRINTING OFFICE 1968-550-547