

R-Rated Fuses

For Motor Circuit Protection

Medium Voltage

JCK, JCK-A, JCL, & JCL-A



- The JCK-A and JCL-A are standard JCK and JCL product with an additional Westinghouse amp guard hookeye.
- This single hookeye is on one end of the fuse and aids in the insertion and removal of the fuse.
- R-Rated medium voltage fuses are back-up current limiting fuses used in conjunction with medium voltage motors and motor controllers.
- Current limiting fuses may be designated as R-Rated if they meet the following requirements:
 1. The fuse will safely interrupt all currents between its minimum and maximum interrupting ratings.
 2. The fuse will melt in a range of 15 to 35 seconds at a value of 100 times the "R" number (ANSI C37.46).
- Bussmann R-Rated current limiting fuses are designed for use with medium voltage starters to provide short-circuit protection for the motor and motor controller.
- These fuses offer a high level of fault current interruption in a self-contained, non-venting package which can be mounted indoors or in an enclosure.
- Blown fuse indication on all fuses.

CATALOG SYMBOL: JCK, JCK-A, JCL, JCL-A

R-RATED

MEDIUM VOLTAGE

CURRENT LIMITING

2750V AC — JCK, JCK-A

5500V AC — JCL, JCL-A

MAX. DESIGN VOLTAGE 2750V AC — JCK, JCK-A

U.L. RECOGNIZED MAXIMUM 2540V AC — JCK, JCK-A

MAX. DESIGN VOLTAGE 5500V AC — JCL, JCL-A

U.L. RECOGNIZED MAXIMUM 5080V AC — JCL, JCL-A

U.L. RECOGNIZED

(GUIDE #M5552, FILE # E96676)


R-Rated Fuses

For Motor Circuit Protection

Medium Voltage

JCK, JCK-A, JCL, & JCL-A

Dimensional Data

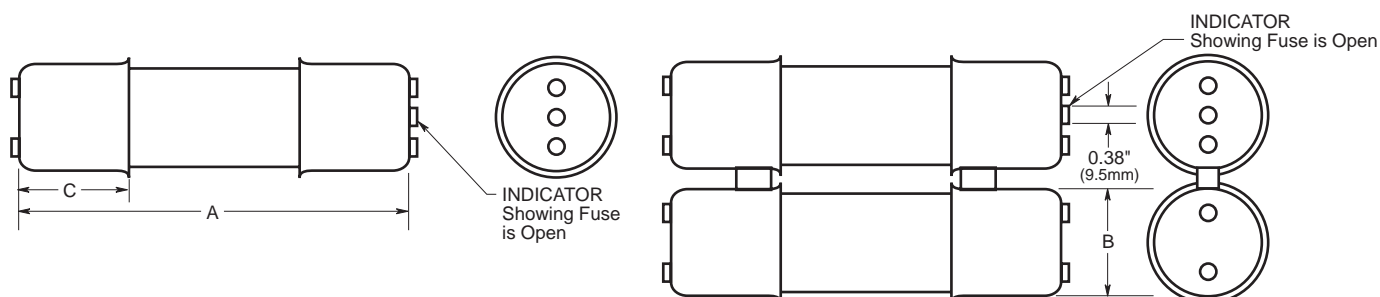

Specifications

Buss Catalog No.	Amperage	Maximum Design Voltage	Dimensions (Inches)			Construction	Max. Int. Cap.		Min. Int. Cap.
			A	B	C		Amps (Asym.)	Amps (Sym.)	
2400V; R-Rated; Indoor/Enclosure									
JCK-2R	70 2R	2750V	11.24	3.0	3.0	Single	80,000	50,000	165
JCK-3R	100 3R	2750V	11.24	3.0	3.0	Single	80,000	50,000	220
JCK-4R	130 4R	2750V	11.24	3.0	3.0	Single	80,000	50,000	320
JCK-5R	150 5R	2750V	11.24	3.0	3.0	Single	80,000	50,000	410
JCK-6R	170 6R	2750V	11.24	3.0	3.0	Single	80,000	50,000	480
JCK-9R	200 9R	2750V	11.24	3.0	3.0	Single	80,000	50,000	720
JCK-12R	230 12R	2750V	11.24	3.0	3.0	Single	80,000	50,000	970
JCK-18R	390 18R	2750V	11.24	3.0	3.0	Double	80,000	50,000	1430
JCK-24R	450 24R	2750V	11.24	3.0	3.0	Double	80,000	50,000	1880
2400V; R-Rated; Indoor/Enclosure; With Westinghouse Amp guard Hookeye									
JCK-A-2R	70 2R	2750V	11.24	3.0	3.0	Single	80,000	50,000	165
JCK-A-3R	100 3R	2750V	11.24	3.0	3.0	Single	80,000	50,000	220
JCK-A-4R	130 4R	2750V	11.24	3.0	3.0	Single	80,000	50,000	320
JCK-A-5R	150 5R	2750V	11.24	3.0	3.0	Single	80,000	50,000	410
JCK-A-6R	170 6R	2750V	11.24	3.0	3.0	Single	80,000	50,000	480
JCK-A-9R	200 9R	2750V	11.24	3.0	3.0	Single	80,000	50,000	720
JCK-A-12R	230 12R	2750V	11.24	3.0	3.0	Single	80,000	50,000	970
JCK-A-18R	390 18R	2750V	11.24	3.0	3.0	Double	80,000	50,000	1430
JCK-A-24R	450 24R	2750V	11.24	3.0	3.0	Double	80,000	50,000	1880
4800V; R-Rated; Indoor/Enclosure									
JCL-2R	70 2R	5500V	15.76	3.0	3.0	Single	80,000	50,000	165
JCL-3R	100 3R	5500V	15.76	3.0	3.0	Single	80,000	50,000	220
JCL-4R	130 4R	5500V	15.76	3.0	3.0	Single	80,000	50,000	320
JCL-5R	150 5R	5500V	15.76	3.0	3.0	Single	80,000	50,000	410
JCL-6R	170 6R	5500V	15.76	3.0	3.0	Single	80,000	50,000	480
JCL-9R	200 9R	5500V	15.76	3.0	3.0	Single	80,000	50,000	720
JCL-12R	230 12R	5500V	15.76	3.0	3.0	Single	80,000	50,000	970
JCL-18R	390 18R	5500V	15.76	3.0	3.0	Double	80,000	50,000	1430
JCL-24R	450 24R	5500V	15.76	3.0	3.0	Double	80,000	50,000	1880
4800V; R-Rated; Indoor/Enclosure; With Westinghouse Amp guard Hookeye									
JCL-A-2R	70 2R	5500V	15.76	3.0	3.0	Single	80,000	50,000	165
JCL-A-3R	100 3R	5500V	15.76	3.0	3.0	Single	80,000	50,000	220
JCL-A-4R	130 4R	5500V	15.76	3.0	3.0	Single	80,000	50,000	320
JCL-A-5R	150 5R	5500V	15.76	3.0	3.0	Single	80,000	50,000	410
JCL-A-6R	170 6R	5500V	15.76	3.0	3.0	Single	80,000	50,000	480
JCL-A-9R	200 9R	5500V	15.76	3.0	3.0	Single	80,000	50,000	720
JCL-A-12R	230 12R	5500V	15.76	3.0	3.0	Single	80,000	50,000	970
JCL-A-18R	390 18R	5500V	15.76	3.0	3.0	Double	80,000	50,000	1430
JCL-A-24R	450 24R	5500V	15.76	3.0	3.0	Double	80,000	50,000	1880


R-Rated Fuses

For Motor Circuit Protection


Medium Voltage

JCK, JCK-A,
JCL, & JCL-A

Current Limitation Curves

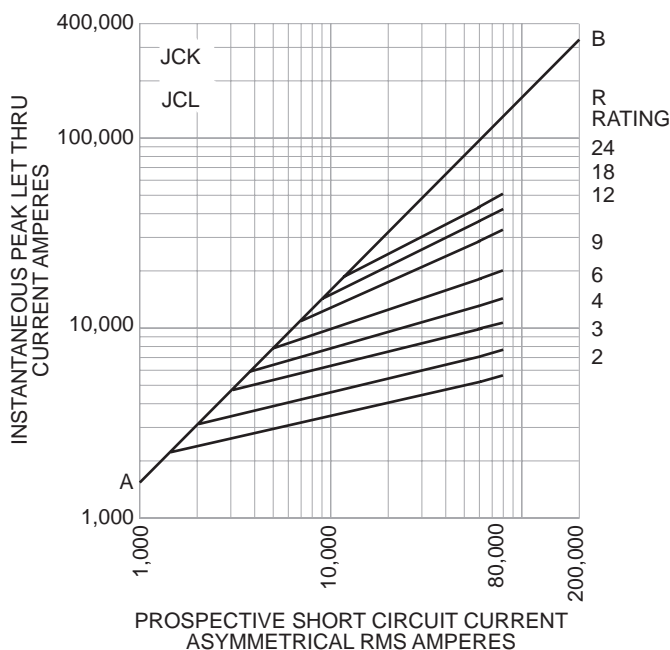

Time-Current Characteristic Curves—Average Melt

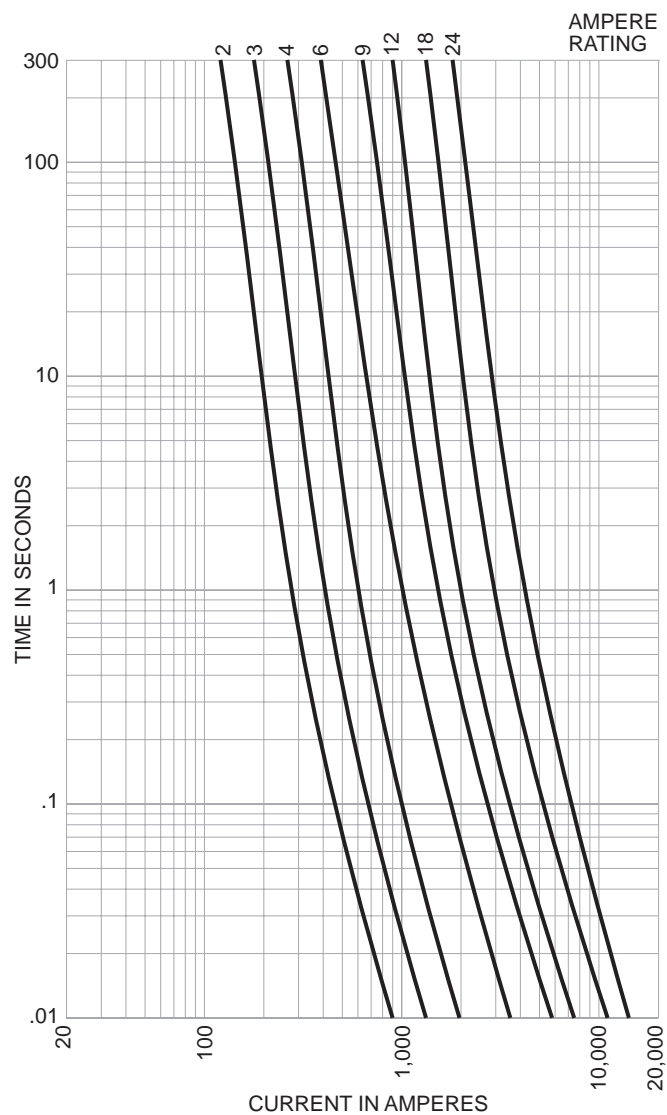

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this BIF document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.