



Micro Commercial Components

Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

# MMDT3906V

## Features

- Epitaxial Die Construction
- Ideal for Low Power Amplification and Switching
- Ultra-small Surface Mount Package
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1
- Marking:KAR

### Maximum Ratings @ 250C Unless Otherwise Specified


Symbol	Rating	Rating	Unit
V <sub>CEO</sub>	Collector-Emitter Voltage	-40	V
V <sub>CBO</sub>	Collector-Base Voltage	-40	V
V <sub>EBO</sub>	Emitter-Base Voltage	-5	V
I <sub>C</sub>	Collector Current-Continuous	-0.2	A
P <sub>C</sub>	Collector Dissipation	0.15	W
R <sub>θJA</sub>	Thermal Resistance Junction to Ambient	833	°C/W
T <sub>J</sub>	Operating Junction Temperature	-55 to +150	°C
T <sub>STG</sub>	Storage Temperature	-55 to +150	°C

### Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Typ	Max	Units
V <sub>(BR)CEO</sub>	Collector-Emitter Breakdown Voltage (I <sub>C</sub> =-1mA, I <sub>B</sub> =0)	-40	---	---	Vdc
V <sub>(BR)CBO</sub>	Collector-Base Breakdown Voltage (I <sub>C</sub> =-10uAdc, I <sub>E</sub> =0)	-40	---	---	Vdc
V <sub>(BR)EBO</sub>	Collector-Emitter Breakdown Voltage (I <sub>E</sub> =-10uAdc, I <sub>C</sub> =0)	-5	---	---	Vdc
I <sub>CEX</sub>	Collector Cutoff Current (V <sub>CE</sub> =-30Vdc, V <sub>EB(OFF)</sub> =-3Vdc)	---	---	50	nAdc
I <sub>BL</sub>	Base Cutoff Current (V <sub>CE</sub> =-30Vdc, V <sub>EB(OFF)</sub> =-3Vdc)	---	---	50	nAdc
h <sub>FE</sub>	DC Current Gain (I <sub>C</sub> =-0.1mA, V <sub>CE</sub> =-1Vdc) (I <sub>C</sub> =-1mA, V <sub>CE</sub> =-1Vdc) (I <sub>C</sub> =-10mA, V <sub>CE</sub> =-1Vdc) (I <sub>C</sub> =-50mA, V <sub>CE</sub> =-1Vdc) (I <sub>C</sub> =-100mA, V <sub>CE</sub> =-1Vdc)	60 80 100 60 30	---	---	---
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage (I <sub>C</sub> =-10mA, I <sub>B</sub> =-1mA) (I <sub>C</sub> =-50mA, I <sub>B</sub> =-5mA)	---	---	-0.25 -0.4	Vdc
V <sub>BE(sat)</sub>	Base-Emitter Saturation Voltage (I <sub>C</sub> =-10mA, I <sub>B</sub> =-1mA) (I <sub>C</sub> =-50mA, I <sub>B</sub> =-5mA)	-0.65 ---	---	-0.85 -0.95	Vdc

## PNP Plastic-Encapsulate Transistors

### SOT-563

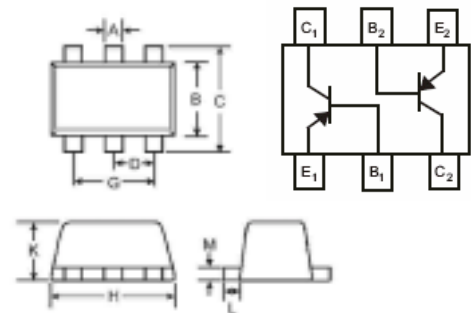

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.006	.011	0.15	0.30	
B	.043	.049	1.10	1.25	
C	.061	.067	1.55	1.70	
D	.020		0.50		
G	.035	.043	0.90	1.10	
H	.059	.067	1.50	1.70	
K	.022	.023	0.56	0.60	
L	.004	.011	0.10	0.30	
M	.004	.007	0.10	0.18	

**Electrical Characteristics @ 25°C Unless Otherwise Specified**

Symbol	Parameter	Min	Typ	Max	Units
$f_T$	Transition Frequency ( $V_{CE}=-20Vdc, I_C=-10mA, f=100MHz$ )	250	---	---	MHz
$C_{ob}$	Output Capacitance ( $V_{CB}=-5Vdc, f=1.0MHz, I_E=0$ )	---	---	4.5	pF
NF	Noise Figure ( $V_{CE}=-5V, I_C=-0.1mA, f=1KHz, R_S=1k\Omega$ )	---	---	4	dB
$t_d$	Delay Time	---	---	35	ns
$t_r$	Rise Time				
$t_s$	Storage Time	---	---	225	ns
$t_f$	Fall Time				

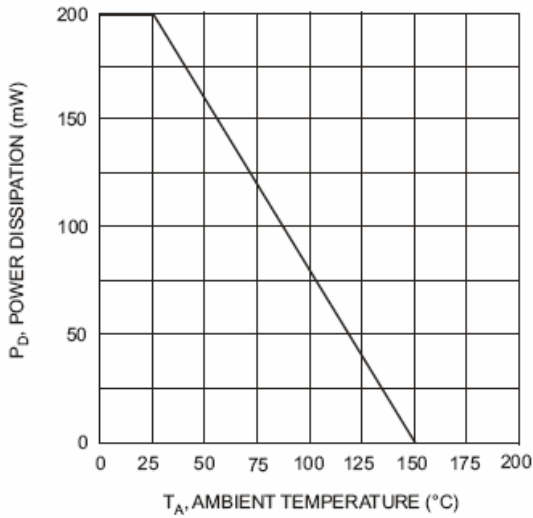


Fig. 1, Max Power Dissipation vs Ambient Temperature

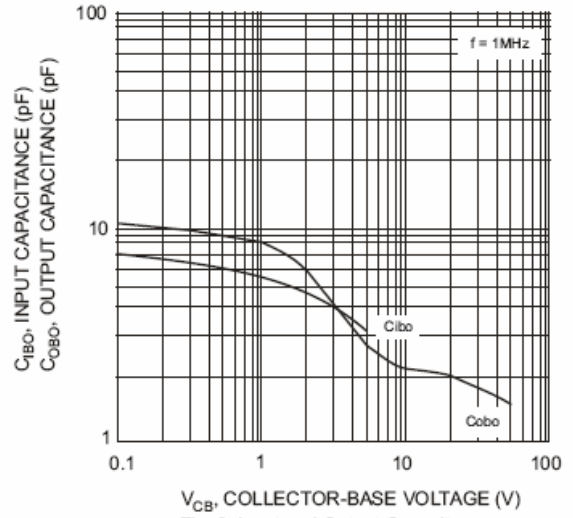


Fig. 2, Input and Output Capacitance vs. Collector-Base Voltage

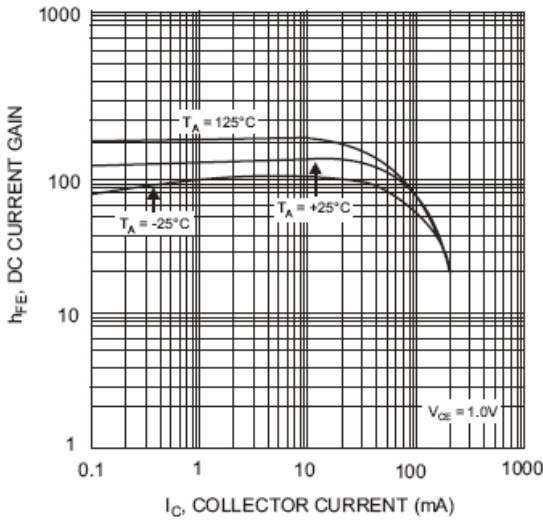


Fig. 3, Typical DC Current Gain vs Collector Current

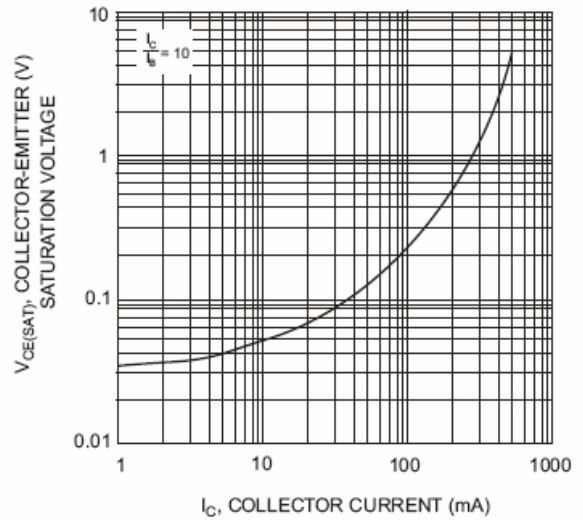


Fig. 4, Typical Collector-Emitter Saturation Voltage vs. Collector Current

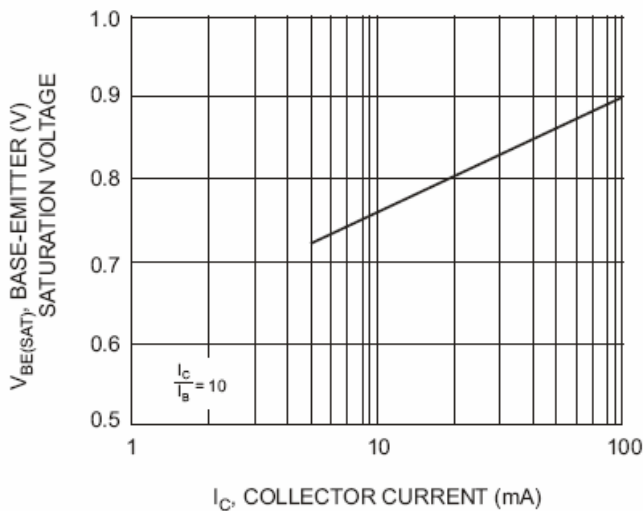


Fig. 5, Typical Base-Emitter Saturation Voltage vs. Collector Current



TM

Micro Commercial Components

## Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

### \*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.