


SSF-LXH2578V SERIES VERTICAL 2.5x7 STACKABLE ARRAY UNIT LEDS

FEATURES			APPLICATIONS			MATERIAL SPECIFICATIONS		
<ul style="list-style-type: none"> • Easy Installation • High Contrast Holder • Four Color Options 			<ul style="list-style-type: none"> • Front Panel Indicator • Status Annunciator • Go-No Go Condition Indicators • Dot Matrix Displays 			<ul style="list-style-type: none"> • Holder: Black Nylon, UL V94-0 • Terminations: 0.5mm □ Leads Insulated Leads Available • Installation: P.C. Or Panel Out 		
LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED	
	PEAK(nm)				TYP (mCD) @	mA		
SSF-LXH2578VID	RED	635	10-25	2.1	8	20	SSL-LX25783XX	
SSF-LXH2578VSRD	RED	660	10-25	1.7	25	20	SSL-LX25783XX	
SSF-LXH2578VGD	GREEN	565	10-25	2.1	8	20	SSL-LX25783XX	
SSF-LXH2578VYD	YELLOW	585	10-25	2.1	8	20	SSL-LX25783XX	

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch)

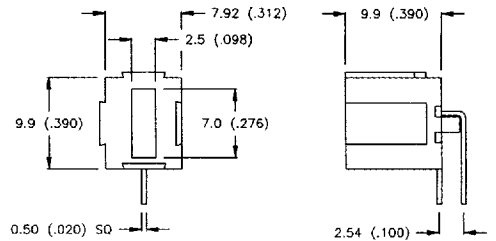


SSF-LXH2578 SERIES HORIZONTAL 2.5x7 STACKABLE ARRAY UNIT LEDS

FEATURES			APPLICATIONS			MATERIAL SPECIFICATIONS		
<ul style="list-style-type: none"> • Easy Installation • High Contrast Holder • Four Color Options 			<ul style="list-style-type: none"> • Front Panel Indicator • Status Annunciator • Go-No Go Condition Indicators • Dot Matrix Displays 			<ul style="list-style-type: none"> • Holder: Black Nylon, UL V94-0 • Terminations: 0.5mm □ Leads Insulated Leads Available • Installation: P.C. Panel Out 		
LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED	
	PEAK(nm)				TYP (mCD) @	mA		
SSF-LXH2578ID	RED	635	10-25	2.1	8	20	SSL-LX25783XX	
SSF-LXH2578SRD	RED	660	10-25	1.7	25	20	SSL-LX25783XX	
SSF-LXH2578GD	GREEN	565	10-25	2.1	8	20	SSL-LX25783XX	
SSF-LXH2578YD	YELLOW	585	10-25	2.1	8	20	SSL-LX25783XX	

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch)

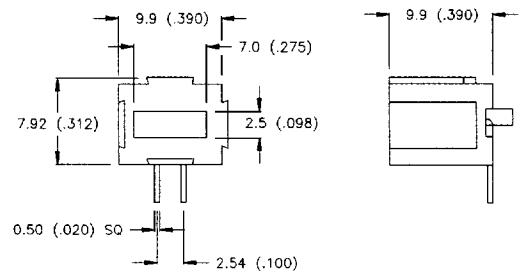

SSF-LXH42103XX SERIES P.C. LED QUAD PIGGY BACK UNIT

FEATURES			APPLICATIONS			MATERIAL SPECIFICATIONS		
<ul style="list-style-type: none"> • Easy P.C. Installation • Quad Piggy Back Unit • Choice of Colors, Current • High Density Unit 			<ul style="list-style-type: none"> • P.C. Mount Indicator • Fault Indicator • Back Lighting Indicator 			<ul style="list-style-type: none"> • Holder: Black Nylon, UL V94-0 • Terminations: 0.5mm □ Leads • Installation: P.C. Mount/Solder 		
LUMEX PART NBR	EMITTED COLOR		OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS		LED SERIES USED	
	PEAK(nm)				TYP (mCD) @	mA		
SSF-LXH42103ID	RED	635	10-25	2.1	8/8	20	SSL-LX3044XX	
SSF-LXH42103SRD	RED	660	10-25	1.7	30/30	20	SSL-LX3044XX	
SSF-LXH42103GD	GREEN	565	10-25	2.1	8/8	20	SSL-LX3044XX	
SSF-LXH42103YD	YELLOW	585	10-25	2.1	8/8	20	SSL-LX3044XX	
LOW CURRENT OPTIONS								
SSF-LXH42103LID	RED	635	1-5	1.8	1/1	2	SSL-LX3044XX	
SSF-LXH42103LGD	GREEN	565	1-5	1.8	1/1	2	SSL-LX3044XX	
SSF-LXH42103LYD	YELLOW	585	1-5	1.8	1/1	2	SSL-LX3044XX	

COLOR COMBINATIONS OPTIONS AVAILABLE

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm/inch)

