



1. Mechanical:

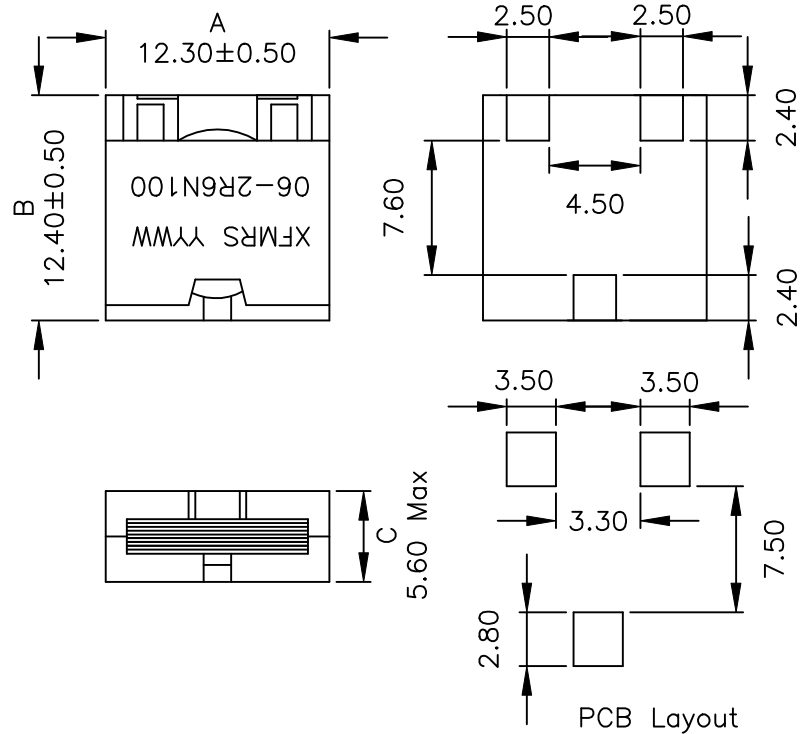

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Operating Temperature Range: -40°C to +85°C

2. Schematic:



3. ELECTRICAL SPECIFICATIONS: @25°C

OCL: 2.60uH±10% @100KHz, 0.25V, ODC
 CURRENT: 10.0 ADC Max, OCL DROP BY 15% Max
 DC Res.: 3.0mOhms Typ

DOC. REV A/1

XFMRS Inc	Title: INDUCTORS		
	UNLESS OTHERWISE SPECIFIED	P/N: XF121206-2R6N100	REV. A
TOLERANCES: .xx ±0.25	DWN.	李小锋	Mar-20-03
Dimensions in mm	CHK.	廖玉坤	Mar-20-03
SHEET 1 OF 1	APP.	BW	Mar-20-03