


719-1420

PROTECTION :Ex ed s IIC T4
Zone 1 and 2**DESCRIPTION :**INCREASED SAFETY ELECTRONIC BALLAST
LUMINAIRE BI-PIN / Thru Wired

TYPE : ELLK92036/36 TW

ORDER CODE : 1 2266 875 111

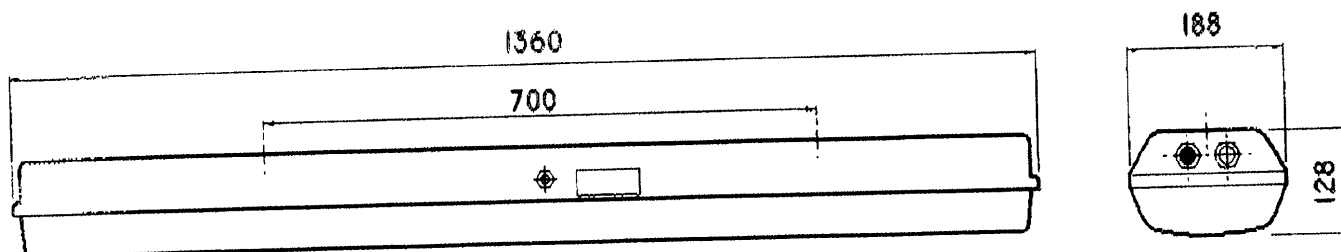

Approx. Weight : 6.9 KG

TUBE	RATED CURRENT AMPS	BATTERY DURATIO N	TERMINALS MM SQ	POWER FACTOR	OPERATING VOLTAGE	CABLE ENTRY	THROUGH WIRED
BI-PIN G-13 26mm TO IEC STANDARD	0.34A	N/A	6MM	0.98 CAP	110 -254V +/-10% 47-63 HZ	4 X M20 Via Earth Plate	YES

GENERAL DESCRIPTION	:	ELECTRONIC CEILING MOUNTED TWIN 2 X 36W LUMINAIRE
ENCLOSURE MATERIAL	:	BODY GLASS MAT REINFORCED POLYESTER WITH A POLYCARBONATE IP66 BOWL
INGRESS PROTECTION	:	IP66
AMBIENT TEMPERATURE	:	AT RATED VOLTAGE -25 TO +50 CELSIUS
APPROVALS	:	EN60 529 (EQUIVALENT TO IEC529) PROTECTED AGAINST DUST AND WATER JETS EN 50081-1/2 - CE MARK APPROVAL
PTB CERTIFICATE	:	PTB EX.92.C.1801 X
AREA OF USE	:	ZONE 1 AND ZONE 2 GAS GROUP IIC T4
OTHER INFORMATION	:	POLE MOUNTED VERSION AVAILABLE

CEAG

CEAG CROUSE-HINDS, UNIT G , QUINN CLOSE, SEVEN STARS IND EST,
WHITLEY, COVENTRY. CV3 4LH
TELEPHONE :- 01203 308930 FAX :- 01203 301027