




Weight: 0.31 g Unit: mm

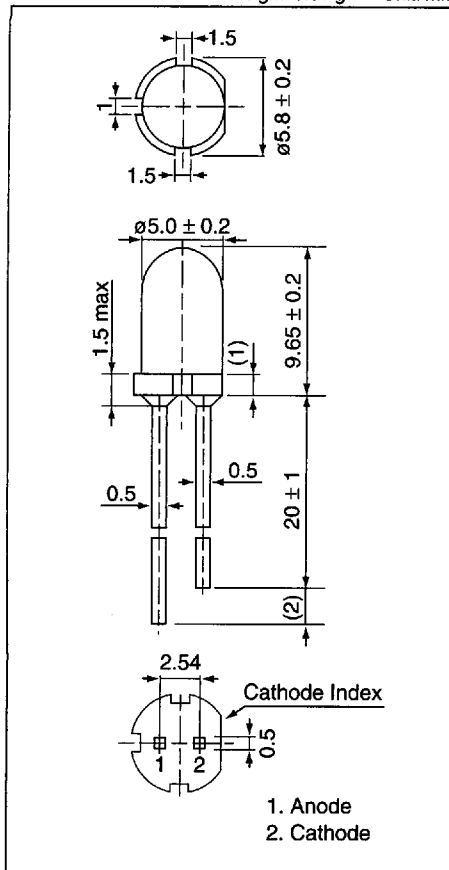

AND180TYP

InGaAlP Yellow Light Emission T-1 3/4 Package (5 mm)

Features

- New emission material (InGaAlP) yellow LED
- Peak wavelength ($\lambda_p = 590$ nm) high bright emission
- All plastic mold type, clear colorless lens
- Low drive current, (forward current = 1 to 20 mA)
- Excellent On-Off contrast ratio
- Fast response time, capable of pulse operation
- High power luminous intensity
- Suitable for Outdoor Message Signboards

Maximum Ratings ($T = 25^\circ\text{C}$)

Characteristics	Symbol	Rating	Unit
Forward Current	I_F	50	mA
Reverse Voltage	V_R	4	V
Power Dissipation	P_D	125	mW
Operating Temperature Range	T_{Opr}	-40 to 85	$^\circ\text{C}$
Storage Temperature Range	T_{Sig}	-40 to 120	$^\circ\text{C}$

Electro-Optical Characteristics ($T = 25^\circ\text{C}$)

Characteristics	Symbol	Test Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	V_F	$I_F = 20$ mA	—	2.1	2.4	V
Reverse Current	I_R	$V_R = 4$ V	—	—	50	μA
Luminous Intensity	I_V	$I_F = 20$ mA	1,800	4,100	—	mcd
Peak Emission Wavelength	λ_P	$I_F = 20$ mA	—	590	—	nm
Spectral Line Half Width	$\Delta\lambda$	$I_F = 20$ mA	—	13	—	nm
Dominant Wavelength	λ_d	$I_F = 20$ mA	—	587	—	nm
Full Viewing Angle	θ	$I_V = 1/2$ Peak	—	8	—	degree

Precaution

Please be careful of the following:

1. Soldering temperature: 260°C max
Soldering time: 3 sec. max
Soldering portion of lead: up to 2 mm from the body of the device
2. The lead can be formed up to 5 mm from the body of the device without forming stress.
Soldering should be performed after the lead forming.

