




FARNELL GROMMET KIT

Order Code 151-201

**Farnell
Technical
Data
Service**

OPEN GROMMETS

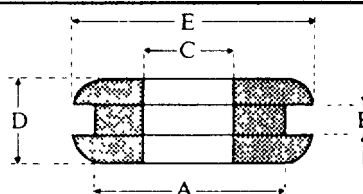

A	B	C	D	E	
4.8	1.6	3.2	6.4	8.0	PV2
6.4	1.6	4.8	7.1	9.5	PV6
6.4	1.6	4.0	6.4	9.5	PV5
8.0	1.6	4.8	6.4	11.1	PV24
9.5	1.6	4.8	5.6	12.7	PV35
9.5	1.6	6.4	6.4	14.3	PV36
9.5	1.6	7.5	6.4	13.5	PV45
9.5	1.6	8.0	4.8	14.3	PV37A
9.5	1.6	6.4	4.8	12.7	PV36A
10.3	1.6	8.0	6.4	15.9	PV44
11.1	1.6	7.2	6.4	15.9	PV837
11.1	1.6	8.0	4.8	14.3	PV50A
11.9	1.6	6.4	8.0	15.9	PV231
12.7	1.6	9.5	6.3	15.9	PV53
11.9	1.6	9.5	6.8	17.5	PV233
14.3	1.6	11.1	6.4	19.0	PV64
19.0	1.6	12.7	6.4	25.4	PV73A
20.0	1.6	16.5	6.5	25.0	PV90

MAXIMUM CONSTANT WORKING TEMPERATURE 70'C

MINIMUM CONSTANT WORKING TEMPERATURE -35'C

BLACK PVC NORMAL SHORE HARDNESS FROM 43' TO 55'