

HOD2132-122/DBA

Single Fiber Duplex Modules

FEATURES


- Full duplex over single fiber
- DC to 85 MHz link bandwidth
- 2 km+ link budget
- 40 dB isolation
- Close Mounting Housing
- Other options available

DESCRIPTION

The Honeywell HODxxxx series of dual wavelength 'Fiber Duplexers' allow communication over a single optical fiber. Applications include full duplex data transmission, multiplexing two signals to a single fiber, LED coupled power measurements and reflected power measurements, depending upon the configuration of the duplexer.


The HOD2132-122/DBA comprises an 1300nm LED and a 850nm PIN diode and it's corresponding part, HOD1344-312/DBA, comprises a 850 nm LED and a 1300 nm PIN diode. The pair facilitate full duplex communication over a single fiber and are designed to be used where a dual fiber solution is not possible or economical. Alternatively the duplexer can be used to double the capacity of an existing system.

Each part consists of an on-axis port and an off-axis port loaded with the appropriate components, these are then coupled to the single fiber via integral lenses and a 3 dB wavelength differentiating mirror within the duplexer body. In this configuration the two pairs of components can communicate in opposing directions simultaneously and independently of each other. Links of 2 km+ are possible with this duplexer pair depending upon the receiver circuitry used. The duplexer housing has a high profile for mounting duplexers side by side and minimising lead length between PIN and PCB, the component ports are positioned to the rear and underside of the housing.

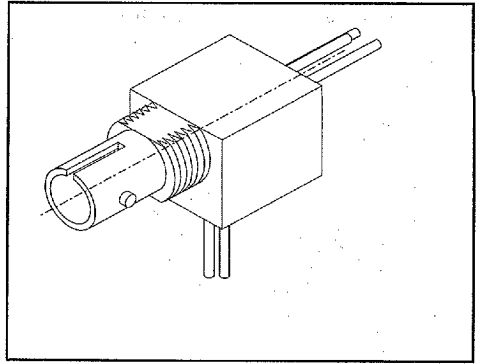

OPHO_228.dwg

OUTLINE DIMENSIONS in inches (mm)

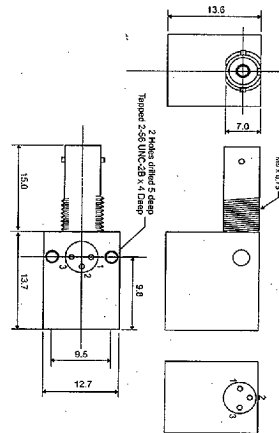

00IM_227.cdr

Pinout

End view

1. Anode
2. Cathode
3. Not connected

Underside view

1. Cathode
2. Case
3. Anode

HOD2132-122/DBA

Single Fiber Duplex Modules

DESCRIPTION (continued)

Other standard options are available on request. These include two LEDs in one duplexer for single fiber multiplexing, PIN + Preamp receivers, VCSEL emitters or any other preferred components. Housing options include SMA, SC or FC/PC optical ports or a low profile ST housing the same height as a standard ST.

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

4551830 0022325 470

Honeywell

621

HOD2132-122/DBA

Single Fiber Duplex Modules

ELECTRO-OPTICAL SPECIFICATIONS 1300nm LED

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Fiber Coupled Power	P_{oc}	20 -17.0	32 -15.0		μW dBm	$I_F = 100 \text{ mA}$ 50/125 μm fiber
Forward Voltage	V_F		1.4	1.7	V	$I_F = 100 \text{ mA}$
Reverse Voltage	V_R			2.0	V	$I_R = 2 \mu A$
Peak Wavelength	λ_P	1290		1350	nm	$I_F = 100 \text{ mA DC}$
Spectral Bandwidth	$\Delta\lambda$			170	nm	$I_F = 100 \text{ mA DC}$
Response Time						
10-90%	t_R		2.5	4	ns	$I_F = 100 \text{ mA}, 50\%$ Duty Cycle, $f = 12.5 \text{ MHz}$
90-10%	t_F		2.5	4	ns	
Analog Bandwidth	BWE		115		MHz	$I_F = 100 \text{ mA}$
Po Temperature Coefficient	$\Delta P_o / \Delta T$		-0.03		dB/°C	$I_F = 100 \text{ mA}$
Capacitance	C		15	50	pF	$V_F = 0 \text{ V}, f = 1 \text{ MHz}$

ELECTRO-OPTICAL SPECIFICATIONS 850nm PIN Diode

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Flux Responsivity	R	0.45	0.52		A/W	$\lambda = 850 \text{ nm}$
Active Area	A		1.1		mm ²	
Dark Current	I_D		0.07	1.0	nA	$V_R = 10 \text{ V}$
Max. Reverse Voltage	V_{RMAX}			20.0	V	
Response Time						
10-90%	t_R		5		ns	$\lambda = 850 \text{ nm}$ $R_L = 50 \Omega$
90-10%	t_F		5		ns	
Capacitance	C		3		pF	$V_R = 5 \text{ V}, f = 1 \text{ MHz}$
Isolation	ICX		40		dB	

ABSOLUTE MAXIMUM RATINGS

Storage temperature	-45 to +125°C
Operating temperature	-40 to +85°C
Lead solder temperature	260°C, 10 s
Continuous forward current	150 mA (LED)
Reverse voltage	2 V (LED)

Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods of time may affect reliability.

4551830 0022326 307


Honeywell

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

HOD2132-122/DBA

Single Fiber Duplex Modules

Fig. 1 Ordering Information - Duplexer Part Numbering Scheme

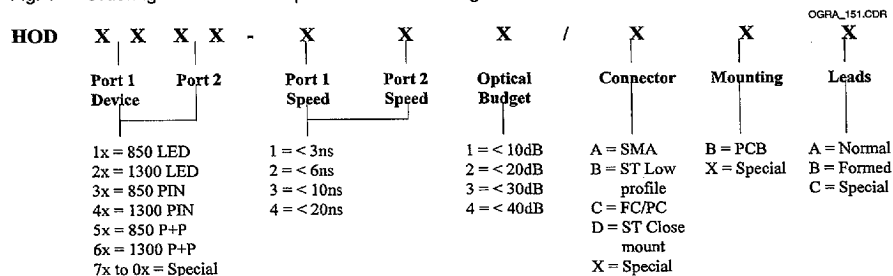

Honeywell reserves the right to make changes in order to improve design and supply the best products possible.

4551830 0022327 243
Honeywell

623