

**APPLICATIONS**

- ✓ Wireless Communication Circuits
- ✓ RS-422, RS-432 & RS-485
- ✓ Low Voltage ASICs
- ✓ Portable Electronics

**IEC COMPATIBILITY (EN61000-4)**



- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 12A, 8/20 $\mu$ s Level 1 (Line-Ground) & Level 2 (Line-Line)

**FEATURES**

- ✓ 500 Watts Peak Pulse Power per Line ( $t_p=8/20\mu$ s)
- ✓ Unidirectional & Bidirectional Configurations
- ✓ ESD Protection > 40 kilovolts
- ✓ Available in Multiple Voltage Types: 3.3V to 24V
- ✓ Protects up to Eight (8) Lines
- ✓ RoHS Compliant

**MECHANICAL CHARACTERISTICS**

- ✓ Molded JEDEC SO-16 Package
- ✓ Weight 0.15 grams (Approximate)
- ✓ Available in Lead-Free Pure-Tin Plating(Annealed)
- ✓ Solder Reflow Temperature:  
Pure-Tin - Sn, 100: 260-270°C
- ✓ Consult Factory for Leaded Device Availability
- ✓ Flammability Rating UL 94V-0
- ✓ 16mm Tape and Reel per EIA Standard 481
- ✓ Packaging: 25 Pieces Per Tube
- ✓ Marking: Logo, Part Number, Date Code & Pin One Defined By Dot on Top of Package

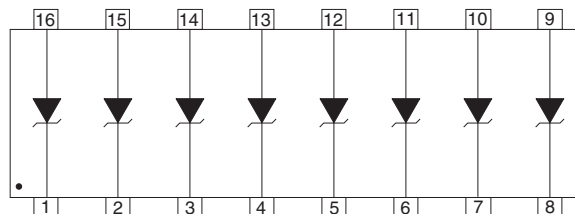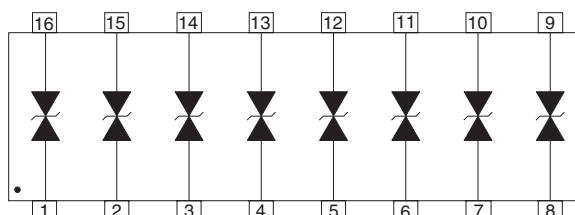
**SO-16**
**PIN CONFIGURATIONS**
**UNIDIRECTIONAL CONFIGURATION**

**BIDIRECTIONAL CONFIGURATION**


# SM1603 thru SM1624C

## DEVICE CHARACTERISTICS

### MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ( $t_p = 8/20\mu s$ ) - See Figure 1	$P_{PP}$	500	Watts
Operating Temperature	$T_L$	-55 to 150	°C
Storage Temperature	$T_{STG}$	-55 to 150	°C

### ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified


PART NUMBER (See Note 1)	RATED STAND-OFF VOLTAGE $V_{WM}$ VOLTS	MINIMUM BREAKDOWN VOLTAGE @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ $I_p = 1A$ $V_c$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2) @ 8/20 $\mu s$ $V_c @ I_{PP}$	MAXIMUM LEAKAGE CURRENT @ $V_{WM}$ $I_b$ $\mu A$	MAXIMUM CAPACITANCE 0V @ 1 MHz C pF	TEMPERATURE COEFFICIENT OF $V_{(BR)}$  qV <sub>(BR)</sub> mV/°C
SM1603	3.3	4.0	7.0	10.9V @ 43A	125	800	-3
SM1603C	3.3	4.0	7.0	10.9V @ 43A	125	450	-3
SM1605	5.0	6.0	9.8	13.5V @ 42A	10	550	3
SM1605C	5.0	6.0	9.8	13.5V @ 42A	10	310	3
SM1608	8.0	8.5	13.4	16.9V @ 34A	10	500	9
SM1608C	8.0	8.5	13.4	16.9V @ 34A	10	280	9
SM1612	12.0	13.3	19.0	25.9V @ 21A	2	185	16
SM1612C	12.0	13.3	19.0	25.9V @ 21A	2	105	16
SM1615	15.0	16.7	25.5	30.0V @ 17A	2	140	17
SM1615C	15.0	16.7	25.5	30.0V @ 17A	2	80	17
SM1624	24.0	26.7	40.0	49.0V @ 12A	2	88	26
SM1624C	24.0	26.7	40.0	49.0V @ 12A	2	50	26

**Note 1:** Part numbers with a "C" suffix are bidirectional devices.


**Note 2:**  $V_F = 1.5$  Volts @ 100mA, 300 $\mu s$  (square wave) unidirectional devices only.

GRAPHS


**FIGURE 1  
 PEAK PULSE POWER VS PULSE TIME**

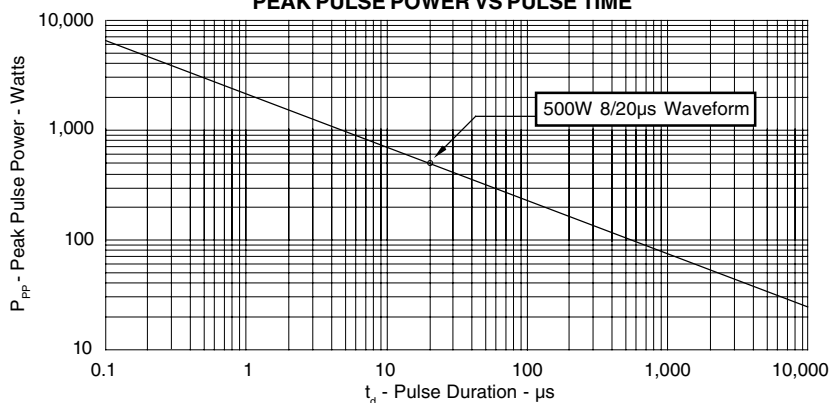

**FIGURE 2  
 PULSE WAVE FORM**

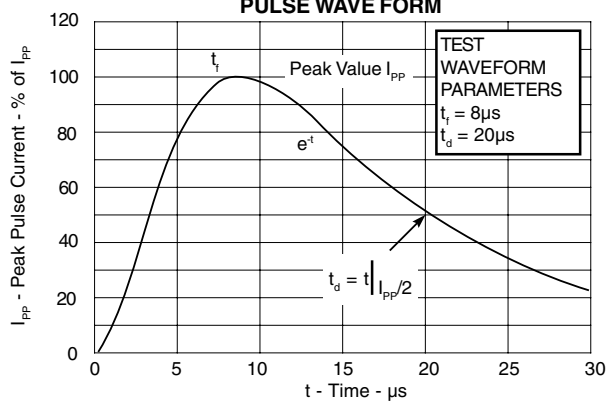


**FIGURE 3  
 POWER DERATING CURVE**

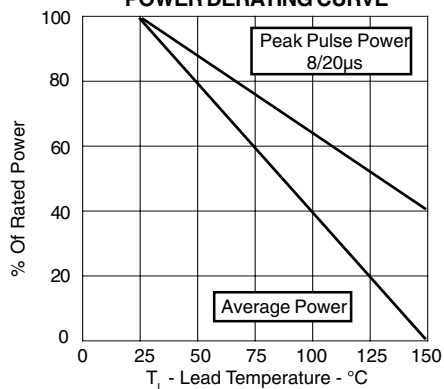

# SM1603 thru SM1624C

## SO-16 PACKAGE OUTLINE & DIMENSIONS

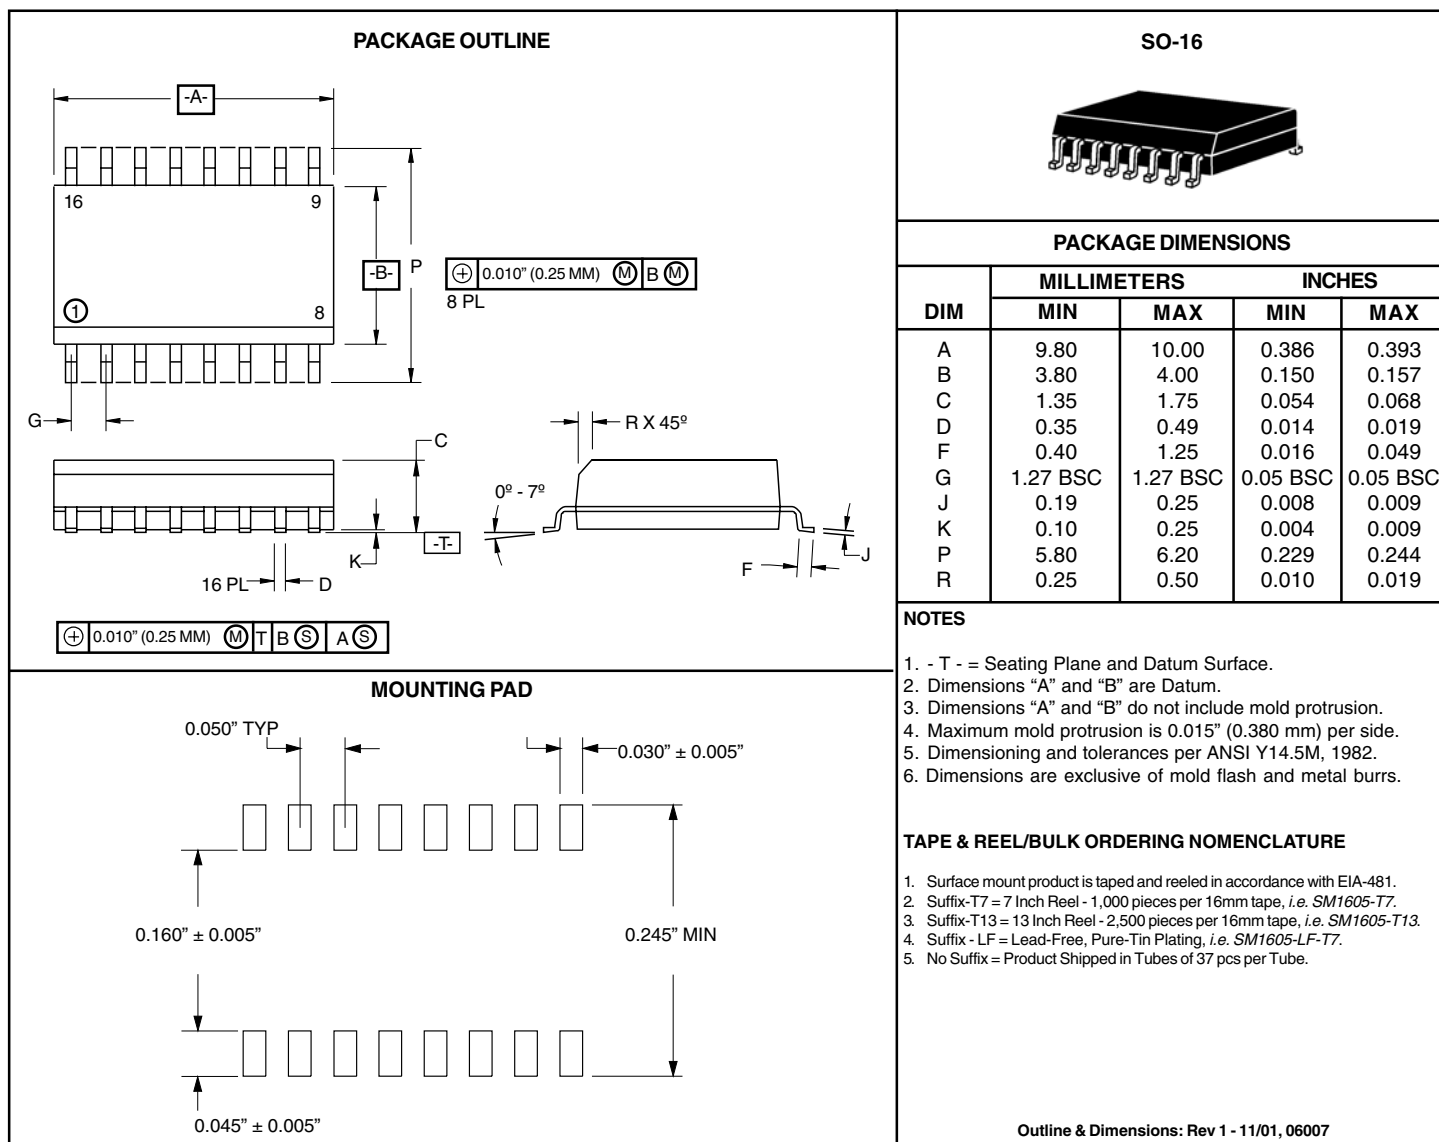

COPYRIGHT © ProTek Devices 2007

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

**ProTek Devices**

2929 South Fair Lane, Tempe, AZ 85282

Tel: 602-431-8101 Fax: 602-431-2288

E-Mail: [sales@protekdevices.com](mailto:sales@protekdevices.com)

Web Site: [www.protekdevices.com](http://www.protekdevices.com)