


FEATURES

- 700ps max. propagation delay
- Extended 100E VEE range of -4.2V to -5.5V
- Differential outputs
- Fully compatible with industry standard 10KH, 100K ECL levels
- Internal 75KΩ input pulldown resistors
- Fully compatible with Motorola MC10E/100E150
- Available in 28-pin PLCC package


DESCRIPTION

The SY10/100E150 are 6-bit D latches with differential outputs designed for use in new, high- performance ECL systems. When both Latch Enables (LEN1, LEN2) are at a logic LOW, the latch is in the transparent mode and input data propagates through to the output. A logic HIGH on either LEN1 or LEN2 (or both) latches the input data. The Master Reset (MR) overrides all other signals to set the Q outputs to a logic LOW.

BLOCK DIAGRAM

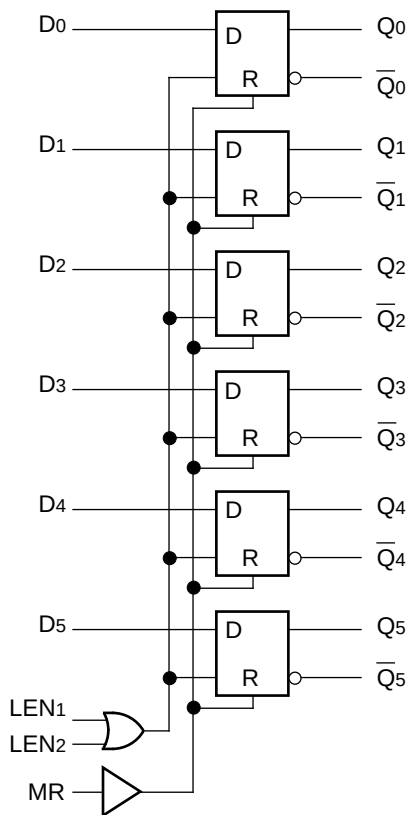

PIN CONFIGURATION

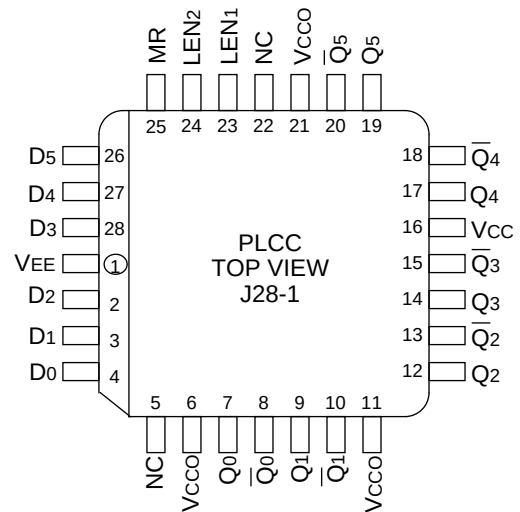

PIN NAMES

Pin	Function
D0-D5	Data Inputs
LEN1, LEN2	Latch Enables
MR	Master Reset
Q0-Q5	True Outputs
Q0-Q5	Inverting Outputs
Vcco	Vcc to Output

TRUTH TABLE⁽¹⁾

(Each Latch)

INPUTS				OUTPUTS		Operating Mode
D _n	LEN ₁	LEN ₂	MR	Q _n	$\overline{Q}_n$	
H	L	L	L	H	L	Latch
L	L	L	L	L	H	
X	X	H	L	Latched ⁽²⁾	Latched ⁽²⁾	
X	H	X	L	Latched ⁽²⁾	Latched ⁽²⁾	
X	X	X	H	L	H	Asynchronous

NOTES:

1. H = HIGH state
L = LOW state
X = Don't care
2. Retains Data that is present before the LEN positive transition.

DC ELECTRICAL CHARACTERISTICSV_{EE} = V_{EE} (Min.) to V_{EE} (Max.); V_{CC} = V_{CCO} = GND

Symbol	Parameter	T _A = 0°C			T _A = +25°C			T _A = +85°C			Unit	Condition
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.		
I _{IH}	Input HIGH Current D LEN MR	—	—	200	—	—	200	—	—	200	μA	—
		—	—	150	—	—	150	—	—	150		
I _{EE}	Power Supply Current										mA	—
	10E	—	52	62	—	52	62	—	52	62		
	100E	—	52	62	—	52	62	—	60	72		

AC ELECTRICAL CHARACTERISTICSV_{EE} = V_{EE} (Min.) to V_{EE} (Max.); V_{CC} = V_{CCO} = GND


Symbol	Parameter	T _A = 0°C			T _A = +25°C			T _A = +85°C			Unit	Condition
		Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.		
t _{PLH} t _{PHL}	Propagation Delay to Output D LEN MR	250 375 450	375 500 625	550 700 750	250 375 450	375 500 625	550 700 750	250 375 450	375 500 625	550 700 750	ps	—
t _s	Set-up Time, D	200	50	—	200	50	—	200	50	—	ps	—
t _H	Hold Time, D	200	–50	—	200	–50	—	200	–50	—	ps	—
t _{RR}	Reset Recovery Time	750	650	—	750	650	—	750	650	—	ps	—
t _{PW}	Minimum Pulse Width, MR	400	—	—	400	—	—	400	—	—	ps	—
t _{skew}	Within-Device Skew	—	50	—	—	50	—	—	50	—	ps	1
t _r t _f	Rise/Fall Time 20% to 80%	300	450	650	300	450	650	300	450	650	ps	—

NOTE:

1. Within-device skew is defined as identical transitions on similar paths through a device.

PRODUCT ORDERING CODE

Ordering Code	Package Type	Operating Range
SY10E150JC	J28-1	Commercial
SY10E150JCTR	J28-1	Commercial
SY100E150JC	J28-1	Commercial
SY100E150JCTR	J28-1	Commercial

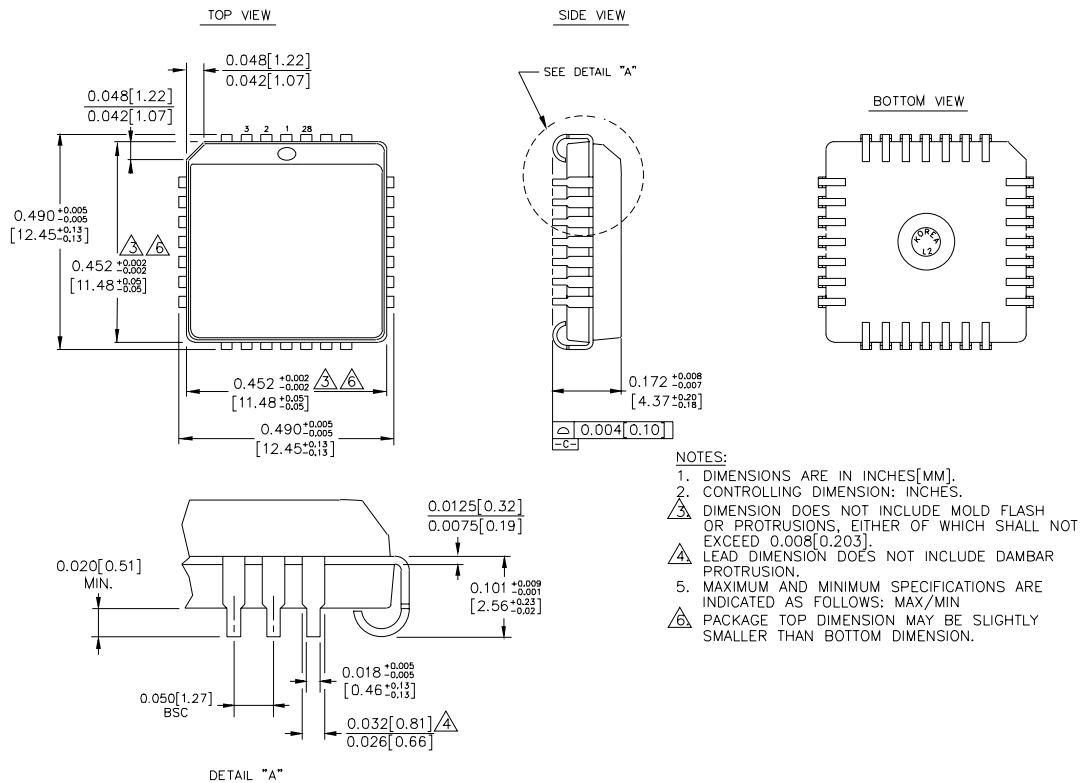28 LEAD PLCC (J28-1)

Rev. 03

MICREL-SYNERGY 3250 SCOTT BOULEVARD SANTA CLARA CA 95054 USATEL + 1 (408) 980-9191 FAX + 1 (408) 914-7878 WEB <http://www.micrel.com>

This information is believed to be accurate and reliable, however no responsibility is assumed by Micrel for its use nor for any infringement of patents or other rights of third parties resulting from its use. No license is granted by implication or otherwise under any patent or patent right of Micrel Inc.

© 2000 Micrel Incorporated