

DESC FORM 193-1  
SEP 87

\* U.S. GOVERNMENT PRINTING OFFICE: 1987 — 748-129/60912  
5962-E1664

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

## 1. SCOPE

1.1 Scope. This drawing describes device requirements for class B microcircuits in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices".

1.2 Part number. The complete part number shall be as shown in the following example:

5962-87605	01	I	X
Drawing number	Device type (1.2.1)	Case outline (1.2.2)	Lead finish per MIL-M-38510

1.2.1 Device type. The device type shall identify the circuit function as follows:

<u>Device type</u>	<u>Generic number</u>	<u>Circuit function</u>
01	LM104	Negative voltage regulator

1.2.2 Case outline. The case outline shall be as designated in appendix C of MIL-M-38510, and as follows:

<u>Outline letter</u>	<u>Case outline</u>
I	A-2 (10-lead, .370" x .185"), can package

## 1.3 Absolute maximum ratings.

Input voltage - - - - -	50 V
Input-output voltage differential - - - - -	50 V <sup>1/</sup>
Storage temperature range - - - - -	-65°C to +150°C
Lead temperature (soldering, 10 seconds) - - - - -	+300°C
Power dissipation (P <sub>D</sub> ) - - - - -	500 mW
Junction temperature (T <sub>J</sub> ) - - - - -	+150°C
Thermal resistance, junction-to-case (θ <sub>JC</sub> ) - - - - -	See MIL-M-38510, appendix C
Thermal resistance, junction-to-ambient (θ <sub>JA</sub> ) - - - - -	150°C/W

## 1.4 Recommended operating conditions.

Ambient operating temperature range (T <sub>A</sub> ) - - - - -	-55°C to +125°C
---	-----------------

<sup>1/</sup> When external booster transistors are used, the minimum output-input voltage differential is increased, in the worst case, by approximately 1 V.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>	5962-87605
	REVISION LEVEL A	SHEET 2

DESC FORM 193A  
SEP 87

U. S. GOVERNMENT PRINTING OFFICE: 1988 - 550 547

## 2. APPLICABLE DOCUMENTS

2.1 Government specification, standard, and bulletin. Unless otherwise specified, the following specification, standard, and bulletin of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

### SPECIFICATION

#### MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

### STANDARD

#### MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

### BULLETIN

#### MILITARY

MIL-BUL-103 - List of Standardized Military Drawing (SMD's).

(Copies of the specification, standard, and bulletin required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing shall take precedence.

## 3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices" and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.2 Logic diagram. The logic diagram shall be as specified on figure 2.

3.2.3 Case outline. The case outline shall be in accordance with 1.2.2 herein.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and apply over the full ambient operating temperature range.

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

3.5 Marking. Marking shall be in accordance with MIL-STD-883 (see 3.1 herein). The part shall be marked with the part number listed in 1.2 herein. In addition, the manufacturer's part number may also be marked as listed in MIL-BUL-103 (see 6.6 herein).

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-87605
		REVISION LEVEL <b>A</b>	SHEET <b>3</b>

DESC FORM 193A  
SEP 87

★ U. S. GOVERNMENT PRINTING OFFICE: 1989-749-033

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions $-55^{\circ}\text{C} < T_A < +125^{\circ}\text{C}$ $I_{\text{REF}} = 1 \text{ mA}$ , $R_{\text{SC}} = 25\Omega$ , $+V_{\text{IN}} = 0 \text{ V}$ , $V_{\text{ADJ}} = -1(1 \text{ mA}) \cdot R_1$ unless otherwise specified	Group A subgroups	Limits		Unit
				Min	Max	
High level current limit sense voltage	VSENSEH	$R_7 - R_8 = 0$ , $R_1 = 2.4 \text{ k}\Omega$ $-8 \text{ V} \geq -V_{\text{IN}} > -18 \text{ V}$ , $V_{\text{ADJ}} = -2.4 \text{ V}$ , $V_{\text{OUT}} = 0 \text{ V}$	1	520	730	mV
			2	280	540	mV
Low level current limit sense voltage	VSENSEL	$-18 \text{ V} \geq -V_{\text{IN}} > -50 \text{ V}$ , $V_{\text{ADJ}} = -2.4 \text{ V}$ , $V_{\text{OUT}} = 0 \text{ V}$ , $R_1 = 2.4 \text{ k}\Omega$	1	580	760	mV
			2	365	560	mV
Quiescent current	I <sub>Q1</sub>	$-40 \text{ V} \geq -V_{\text{IN}} > -50 \text{ V}$ , $V_{\text{ADJ}} = 0 \text{ V}$ , $V_{\text{OUT}} = 0 \text{ V}$ , $R_{\text{SC}} = 15\Omega$ , $I_{\text{LOAD}} = 0 \text{ mA}$	1, 2, 3		3	mA
	I <sub>Q2</sub>	$-42 \text{ V} \geq -V_{\text{IN}} > -50 \text{ V}$ , $V_{\text{ADJ}} = -20 \text{ V}$ , $V_{\text{OUT}} = -40 \text{ V}$ , $0 \text{ mA} < I_{\text{LOAD}} \leq 20 \text{ mA}$ , $R_1 = 20 \text{ k}\Omega$	1, 2, 3		5	mA
	I <sub>Q3</sub>	$-V_{\text{IN}} = -50 \text{ V}$ , $V_{\text{ADJ}} = -5 \text{ V}$ , $V_{\text{OUT}} = -10 \text{ V}$ , $I_{\text{LOAD}} = 0 \text{ mA}$ , $R_1 = 5 \text{ k}\Omega$ , $T_A = +25^{\circ}\text{C}$	1		3.5	mA
Output voltage	V <sub>OUT</sub>	$-V_{\text{IN}} = -5 \text{ V}$ , $+V_{\text{IN}} = 10 \text{ V}$ , $V_{\text{ADJ}} = 5 \text{ V}$ , $V_{\text{OUT}} = 0 \text{ V}$ , $V_{\text{REF}} = -5 \text{ V}$	1	-11	-9	V
		$-V_{\text{IN}} = -2 \text{ V}$ , $+V_{\text{IN}} = 40 \text{ V}$ , $V_{\text{ADJ}} = 20 \text{ V}$ , $V_{\text{OUT}} = 0 \text{ V}$ , $V_{\text{REF}} = -2 \text{ V}$	1, 2, 3	-41	-39	V
		$-V_{\text{IN}} = -10 \text{ V}$ , $+V_{\text{IN}} = 40 \text{ V}$ , $V_{\text{ADJ}} = 20 \text{ V}$ , $V_{\text{OUT}} = 0 \text{ V}$ , $V_{\text{REF}} = -10 \text{ V}$	1, 2, 3	-41	-39	V
Output voltage change	$\Delta V_{\text{OUT}}$	$-V_{\text{IN}} = -8 \text{ V to } -50 \text{ V}$ , $V_{\text{ADJ}} = 0 \text{ V}$ , $V_{\text{REF}} = -8 \text{ V to } -50 \text{ V}$	1, 2, 3		$\pm 20$	mV
		$-V_{\text{IN}} = -10 \text{ V to } -8 \text{ V}$ , $V_{\text{REF}} = -8 \text{ V}$ , $V_{\text{ADJ}} = 0 \text{ V}$	1, 2, 3		$\pm 20$	mV

**STANDARDIZED  
MILITARY DRAWING**

DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
**A**

5962-87605

REVISION LEVEL  
**A**

SHEET  
**4**

DESC FORM 193A  
SEP 87

U. S. GOVERNMENT PRINTING OFFICE: 1989-749-033

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C < T <sub>A</sub> < +125°C I <sub>REF</sub> = 1 mA, R <sub>SC</sub> = 25Ω, +V <sub>IN</sub> = 0 V, V <sub>ADJ</sub> = -1(1 mA)*R <sub>1</sub> unless otherwise specified	Group A subgroups	Limits		Unit
				Min	Max	
Reference current	I <sub>REF</sub>	-8 V ≥ -V <sub>IN</sub> ≥ -50 V, V <sub>REF</sub> = -8 V, V <sub>ADJ</sub> = 0 V, V <sub>OUT</sub> = 0 V	1, 2, 3	0.9	1.11	mA
Reference current change	ΔI <sub>REF</sub>	-V <sub>IN</sub> = -50 V to -8 V, V <sub>REF</sub> = -8 V	1		±5	μA
			2, 3		±7	μA
		-V <sub>IN</sub> = -8 V to -50 V, V <sub>REF</sub> = -V <sub>IN</sub>	1		±15	μA
			2, 3		±20	μA
Line regulation	V <sub>RLINE</sub>	-V <sub>IN</sub> = -2 V to -10 V, I <sub>L</sub> = 0 mA, +V <sub>IN</sub> = 40 V, V <sub>ADJ</sub> = 20 V, V <sub>OUT</sub> = 0 V	1		±5	mV
			2, 3		±10	mV
		-V <sub>IN</sub> = -2 V to -10 V, I <sub>L</sub> = 20 mA, +V <sub>IN</sub> = 40 V, V <sub>ADJ</sub> = 20 V, V <sub>OUT</sub> = 0 V, R <sub>SC</sub> = 15Ω	1		±5	mV
			2, 3		±10	mV
		-V <sub>IN</sub> = -2 V to -40 V, +V <sub>IN</sub> = 10 V, V <sub>OUT</sub> = 0 V, V <sub>ADJ</sub> = 5 V, I <sub>LOAD</sub> = 0 mA	1		±150	mV
Load regulation	V <sub>RLOAD</sub>	I <sub>L</sub> = 0 mA to 20 mA, +V <sub>IN</sub> = 40 V, V <sub>ADJ</sub> = 20 V, V <sub>OUT</sub> = 0 V, -V <sub>IN</sub> = -2 V, R <sub>SC</sub> = 15Ω	1, 2, 3		±5	mV
		I <sub>L</sub> = 0 mA to 20 mA, +V <sub>IN</sub> = 40 V, V <sub>ADJ</sub> = 20 V, V <sub>OUT</sub> = 0 V, -V <sub>IN</sub> = -10 V, R <sub>SC</sub> = 15Ω	1, 2, 3		±5	mV

STANDARDIZED

MILITARY DRAWING

DEFENSE ELECTRONICS SUPPLY CENTER

DAYTON, OHIO 45444

SIZE

A

5962-87605

REVISION LEVEL

A

SHEET

5

TABLE I. Electrical performance characteristics - Continued.

Test	Symbol	Conditions -55°C < T <sub>A</sub> < +125°C I <sub>REF</sub> = 1 mA, R <sub>SC</sub> = 25Ω, +V <sub>IN</sub> = 0 V, V <sub>ADJ</sub> = -1(1 mA)*R <sub>I</sub> unless otherwise specified	Group A subgroups	Limits		Unit
				Min	Max	
Ripple rejection	R <sub>R</sub>	C1-C9 = 10 μF, f = 120 Hz, DCV <sub>IN</sub> = -49 V, DCV <sub>OUT</sub> = -40 V, I <sub>LOAD</sub> = 20 mA, V <sub>RIPPLE</sub> = 1 V rms, T <sub>A</sub> = +25°C	4		0.5	mV/V
		C1-C9 = 10 μF, f = 120 Hz, DCV <sub>IN</sub> = -8 V, DCV <sub>OUT</sub> = 0 V, I <sub>LOAD</sub> = 0 mA, V <sub>RIPPLE</sub> = 1 V rms, T <sub>A</sub> = +25°C	4		1.0	mV/V
V <sub>OS</sub> of internal operational amplifier	V <sub>OS</sub>	-8 V ≥ -V <sub>IN</sub> > -50 V, V <sub>ADJ</sub> = 0 V, V <sub>OUT</sub> = 0 V, V <sub>REF</sub> = -8 V	1, 2, 3		±15	mV
		-V <sub>IN</sub> = -50 V, V <sub>ADJ</sub> = 0 V, V <sub>OUT</sub> = 0 V, V <sub>REF</sub> = -50 V	1, 2, 3		±15	mV

3.6 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-BUL-103 (see 6.6 herein). The certificate of compliance submitted to DESC-ECS prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-STD-883 (see 3.1 herein) and the requirements herein.

3.7 Certificate of conformance. A certificate of conformance as required in MIL-STD-883 (see 3.1 herein) shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change. Notification of change to DESC-ECS shall be required in accordance with MIL-STD-883 (see 3.1 herein).

3.9 Verification and review. DESC, DESC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.


#### 4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with section 4 of MIL-M-38510 to the extent specified in MIL-STD-883 (see 3.1 herein).

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-87605
		REVISION LEVEL <b>A</b>	SHEET <b>6</b>

DESC FORM 193A  
SEP 87

☆ U. S. GOVERNMENT PRINTING OFFICE: 1989-749-033

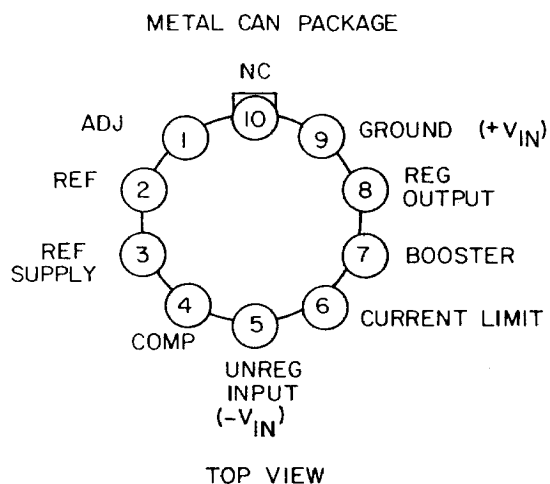

NOTE: Pin 5 connected to case.

FIGURE 1. Terminal connections.

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>	5962-87605	
	REVISION LEVEL A		SHEET 7

DESC FORM 193A  
SEP 87

☆ U. S. GOVERNMENT PRINTING OFFICE: 1989-749-033

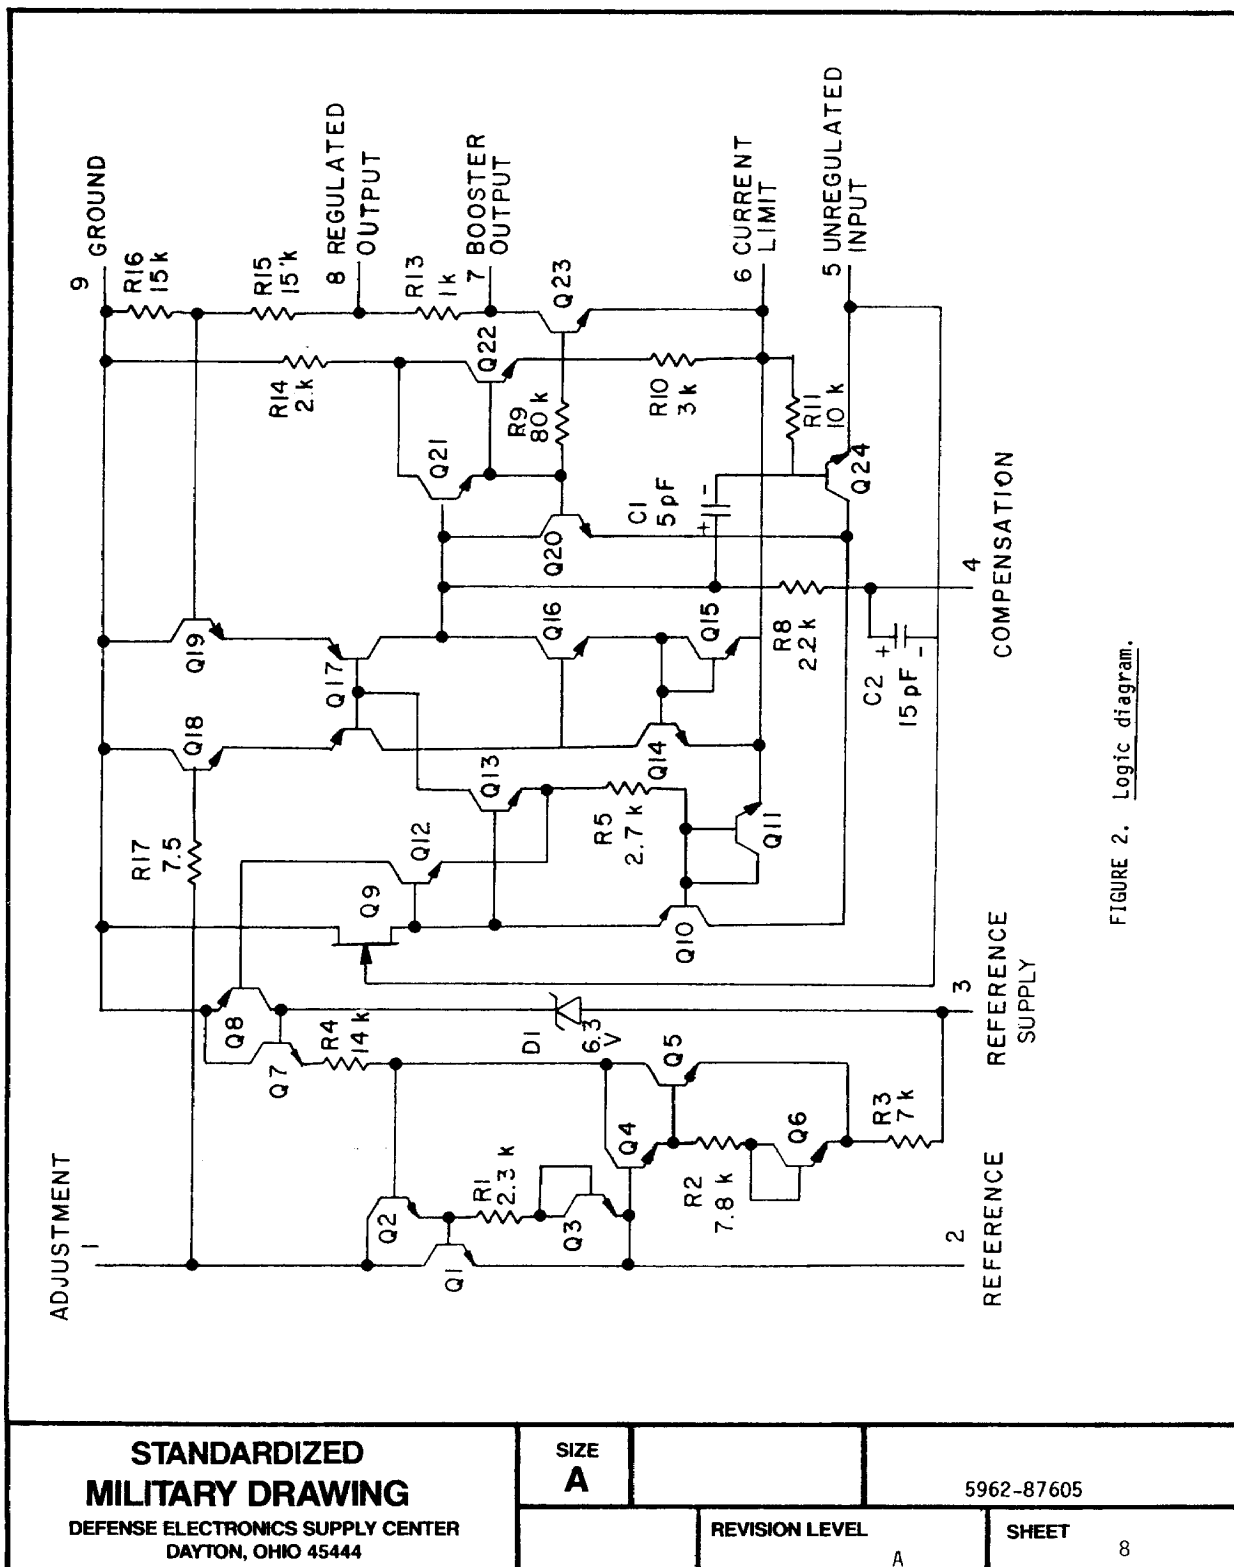


FIGURE 2. Logic diagram.

DESC FORM 193A  
SEP 87

U S GOVERNMENT PRINTING OFFICE 1989-749-033



TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (per method 5005, table I)
Interim electrical parameters (method 5004)	---
Final electrical test parameters (method 5004)	1*, 2, 3, 4
Group A test requirements (method 5005)	1, 2, 3, 4
Groups C and D end-point electrical parameters (method 5005)	1, 2, 3, 4

\* PDA applies to subgroup 1.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).

(2)  $T_A = +125^{\circ}\text{C}$ , minimum.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

4.3.1 Group A inspection.

a. Tests shall be as specified in table II herein.

b. Subgroups 5, 6, 7, 8, 9, 10, and 11 in table I, method 5005 of MIL-STD-883 shall be omitted.

4.3.2 Groups C and D inspections.

a. End-point electrical parameters shall be as specified in table II herein.

b. Steady-state life test conditions, method 1005 of MIL-STD-883.

(1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.6 herein).

(2)  $T_A = +125^{\circ}\text{C}$ , minimum.

(3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

**STANDARDIZED  
MILITARY DRAWING**

DEFENSE ELECTRONICS SUPPLY CENTER  
DAYTON, OHIO 45444

SIZE  
**A**

5962-87605

REVISION LEVEL  
**A**

SHEET  
**9**

## 5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.

## 6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-38510, the device specified herein will be inactivated and will not be used for new design. The QPL-38510 product shall be the preferred item for all applications.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished in accordance with MIL-STD-481 using DD form 1693, Engineering Changes Proposal (Short Form).

6.4 Record of users. Military and industrial users shall inform Defense Electronics Supply Center when a system application requires configuration control and the applicable SMD. DESC will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronic devices (FSC 5692) should contact DESC-ECS, telephone (513) 296-6022.

6.5 Comments. Comments on this drawing should be directed to DESC-ECS, Dayton, Ohio 45444, or telephone (513) 296-5375.

6.6 Approved source of supply. An approved source of supply is listed in MIL-BUL-103. Additional sources will be added to MIL-BUL-103 as they become available. The vendor listed in MIL-BUL-103 has agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DESC-ECS. The approved source of supply listed below are for information purposes only and are current only to the date of the last action of this document.

Military drawing part number	Vendor CAGE number	Vendor similar part number <u>1/</u>	Replacement military specification part number
5962-8760501IX	27014	LM104H/883B	

1/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE  
number

27014

Vendor name  
and address

National Semiconductor Corporation  
2900 Semiconductor Drive  
P.O. Box 58090  
Santa Clara, CA 95052-8090

<b>STANDARDIZED MILITARY DRAWING</b> DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE <b>A</b>		5962-87605
		REVISION LEVEL <b>A</b>	SHEET <b>10</b>

DESC FORM 193A  
SEP 87

U. S. GOVERNMENT PRINTING OFFICE: 1989-749-033

019154