


Features

- T-1 right angle PCB mount LED
- Diffused lens
- Stackable end to end
- Other colors/materials available

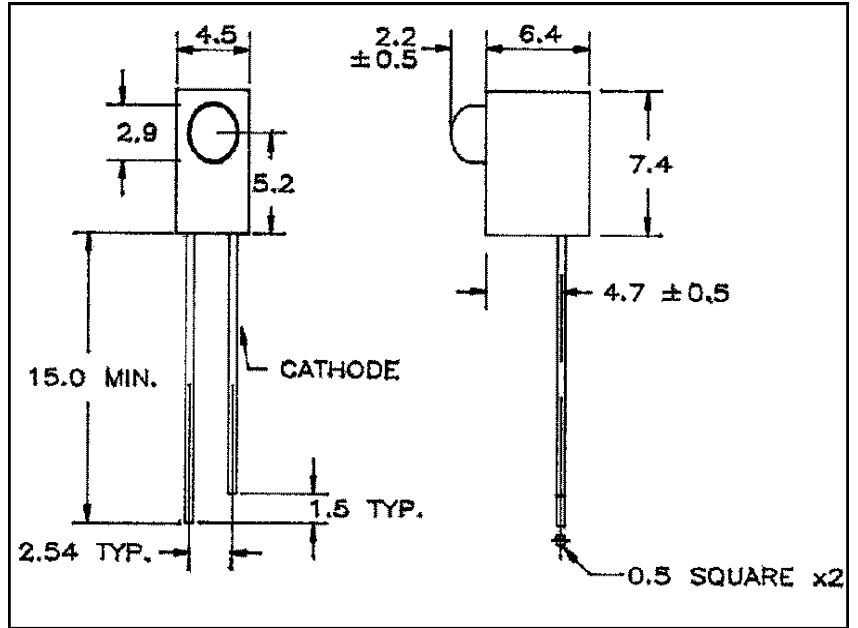

Series Line-Up

Part Number	Color	Material
MT1163S2-RG	Red	GaP
MT2163S2-G	Yellow Green	GaP
MT3163S2-Y	Pure Yellow	GaAsP
MT4163S2-AO	Orange	GaAsP
MT4163S2-HR	High Efficiency Red	GaAsP
MT4163S2-O	High Efficiency Red	GaAsP

Maximum Ratings (Ta=25°C)

Part Number	Forward Current I _F	Reverse Voltage V _R	Power Dissipation P _D	Operating Temperature T _{opr}	Storage Temperature T _{stg}
MT1163S2-RG	30	5	85.00	-25 ~ +85	-25 ~ +100
MT2163S2-G	30	5	85.00	-25 ~ +85	-25 ~ +100
MT3163S2-Y	30	5	85.00	-25 ~ +85	-25 ~ +100
MT4163S2-AO	30	4	85.00	-40 ~ +60	-40 ~ +60
MT4163S2-HR	30	5	85.00	-25 ~ +85	-25 ~ +100
MT4163S2-O	30	5	85.00	-25 ~ +85	-25 ~ +100
Unit	mA	V	mW	°C	°C

Company Headquarters
 120 Broadway
 Menands, New York 12204
 Toll Free: 800.984.5337
 Fax: 518.432.7454

Electrical and Optical Characteristics (Ta=25°C)

Part Number	PWL nm λ_P	Material	View Angle $2\theta_{1/2}$	Luminous Intensity I_v				Forward Voltage V_F				Rev Current I_R	
				min.	typ.	max.	IF@	min.	typ.	max.	IF@	max.	VR@
MT1163S2-RG	700	GaP	42°	1.90	3.20	-	20mA	-	2.10	3.00	20mA	100	5V
MT2163S2-G	567	GaP	42°	5.40	40.00	-	20mA	-	2.10	3.00	20mA	100	5V
MT3163S2-Y	585	GaAsP	42°	4.40	25.00	-	20mA	-	2.10	3.00	20mA	100	5V
MT4163S2-AO	610	GaAsP	42°	10.40	17.30	-	20mA	-	2.10	3.00	20mA	100	4V
MT4163S2-HR	635	GaAsP	42°	6.20	35.00	-	20mA	-	2.10	3.00	20mA	100	5V
MT4163S2-O	635	GaAsP	42°	6.20	35.00	-	20mA	-	2.10	3.00	20mA	100	5V
-	nm	-	deg	mcd				-	V		-	μA	-

NOTES:

- All Dimensions are in millimeters.
- Tolerance is ± 0.25 mm unless otherwise stated.
- An Epoxy Meniscus may extend about 1mm down the leads.
- Burr around bottom of epoxy may be around 0.5mm MAX.
- Specifications are subject to change without notice.