


type N6 series

An innovative fully enclosed trimmer potentiometer. The element is a patented technique using special carbon polymer inks on polyester film and the device is packaged on tape as standard for auto insertion. The units can be adjusted from either side, have a full 280° of adjustment and have a wide value range. The N6 is designed for consumer applications but will be widely used in a range of telecomms, instrumentation, medical and automotive industry sectors.

PCB Trimmers

Key features

- small dimensions
- fully enclosed
- both side adjustment
- available on tape or bulk packed
- special carbon on film technology
- full 280° rotation
- -25°C to +70°C temperature range
- available from stock

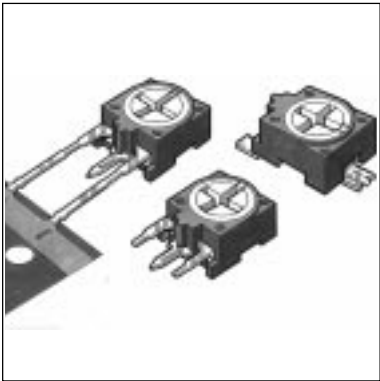

Specification

Electrical

Resistance Range:	200R to 1M (Linear)
Resistance Values:	1, 2.2, 2.5, 4.7, 5 in each decade
Resistance Tolerance:	± 30%
End Resistance:	<2% or 10R whichever is greater
Rotational Noise (CRV):	<5%
Power Rating:	0.1W maximum at 40°C
Element Voltage:	100V DC
Electrical Rotation:	245° ±25°

Mechanical

End Stop Torque:	>35 mNm
Operating Torque:	2 - 30 mNm
Mechanical Adjustment:	280° nominal


Environmental

Temperature Range:	- 25°C ~ +70°C
Rotational Life:	100 cycles
Load Life:	ΔR <10% after 1000 hours

Dimensions

N6 L25

N6 S25

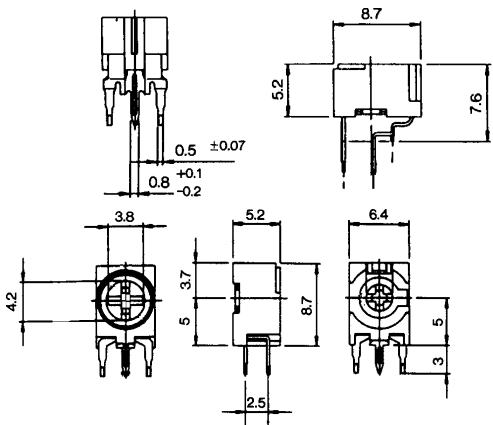

How To Order

N6	S25	TO	102		N
Common Part	Adjustment Style	Pack Style	Resistance Value		Tolerance
N6	S25 - Side Adjust L25 - Top Adjust L30 - Top Adjust (Taped)	TO - Bulk  TI - Taped	The first two digits are significant figures of resistance value and the third one denotes the number of zeros following	Example 1K :102 10K :103 100K:104	N - ± 30%

Please Request Full Data Sheet F0246

sales action desk (01793) 611666  
sales fax line (01793) 511513

If you require information on taped product for auto insertion, please discuss with our sales staff, as we have alternative styles to fit various auto insertion equipment.