


### Features

- Current transfer ratio  
( CTR : MIN. 40% at  $I_F = 5\text{mA}$ ,  $V_{CE} = 5\text{V}$  )
- High isolation voltage between input and output  
(  $V_{ISO} = 5,000\text{Vrms}$  )
- High collector-emitter voltage  
(  $V_{CEO} : 300\text{V}$  )
- UL approved ( No. E113898 )
- VDE approved ( No. 094722 )
- FIMKO approved (No. 209049)
- SEMKO approved (No. 9943380/01-20)
- NEMKO approved ( No. P99102464 )
- DEMKO approved (No. 99-04182 )
- CSA approve in progress
- Options Available :
  - Leads with 0.4" (10.16mm) Spacing (M Type)
  - Lead Bends for Surface Mounting (S Type)
  - Tape and Reel of Type I for SMD (Add "-TA" Suffix)
  - Tape and Reel of Type II for SMD (Add "-TA1" Suffix)
  - VDE 0884 Approvals (Add "-V" Suffix)

### Applications

1. ON-OFF switching for transmission / reception circuit for telephone
2. Interface to various power supply circuits, power patch boards
3. Copiers, facsimiles
4. Output section for numerical control machines
5. Controller for SSRs, DC motors

### Package Dimensions

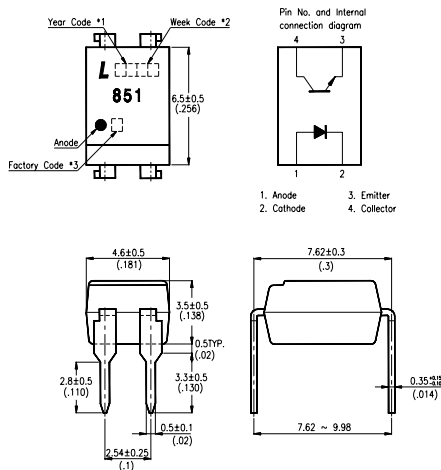

### NOTES :

1. Year date code.
2. 2-digit work week.
3. Factory code shall be marked  
( Z : Taiwan, Y : Thailand ).
4. All dimensions are in millimeters (inches).
5. Tolerance is  $\pm 0.25\text{mm}$  (.010") unless otherwise noted.
6. Specifications are subject to change without notice.

### Ordering Information

| Part Number                                                       | Package                                                                                                                                                                         | Safety Standard Approval                                                                                                                                                                                   | Application part number |
|-------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| LTV-851<br>LTV-851M<br>LTV-851S<br>LTV-851S-TA<br>LTV-851S-TA1    | 4-pin DIP<br>4-pin (leads with 0.4" spacing)<br>4-pin (lead bends for surface mount)<br>4-pin (tape and reel packaging of type I)<br>4-pin (tape and reel packaging of type II) | <ul style="list-style-type: none"> <li>• UL approved</li> <li>• FIMKO approved</li> <li>• SEMKO approved</li> <li>• CSA approve in progress</li> <li>• NEMKO approved</li> <li>• DEMKO approved</li> </ul> | LTV - 851               |
| LTV851-V<br>LTV851M-V<br>LTV851S-V<br>LTV851STA-V<br>LTV851STA1-V | 4-pin DIP<br>4-pin (leads with 0.4" spacing)<br>4-pin (lead bends for surface mount)<br>4-pin (tape and reel packaging of type I)<br>4-pin (tape and reel packaging of type II) | <ul style="list-style-type: none"> <li>• VDE approved</li> </ul>                                                                                                                                           | LTV - 851               |

## Ratings and Characteristics

### Absolute Maximum Ratings

(Ta=25°C)

| Parameter                 |                             | Symbol           | Rating   | Unit             |
|---------------------------|-----------------------------|------------------|----------|------------------|
| Input                     | Forward Current             | I <sub>F</sub>   | 50       | mA               |
|                           | Reverse Voltage             | V <sub>R</sub>   | 6        | V                |
|                           | Power Dissipation           | P                | 70       | mW               |
| Output                    | Collector-Emitter Voltage   | V <sub>CEO</sub> | 300      | V                |
|                           | Emitter-Collector Voltage   | V <sub>ECO</sub> | 6        | V                |
|                           | Collector Current           | I <sub>C</sub>   | 50       | mA               |
|                           | Collector Power Dissipation | P <sub>C</sub>   | 150      | mW               |
| Total Power Dissipation   |                             | P <sub>tot</sub> | 200      | mW               |
| *1. Isolation Voltage     |                             | V <sub>iso</sub> | 5,000    | V <sub>rms</sub> |
| Operating Temperature     |                             | T <sub>opr</sub> | -25~+100 | °C               |
| Storage Temperature       |                             | T <sub>stg</sub> | -55~+125 | °C               |
| *2. Soldering Temperature |                             | T <sub>sol</sub> | 260      | °C               |

\*1. AC for 1 minute, R.H. = 40 ~ 60%

Isolation voltage shall be measured using the following method.

- (1) Short between anode and cathode on the primary side and between collector and emitter on the secondary side.
- (2) The isolation voltage tester with zero-cross circuit shall be used.
- (3) The waveform of applied voltage shall be a sine wave.

\*2. For 10 seconds

## Electrical / Optical Characteristics

(Ta=25°C)

|                          | Parameter                            | Symbol               | Min.                 | Typ.                 | Max. | Unit | Conditions                                                              |
|--------------------------|--------------------------------------|----------------------|----------------------|----------------------|------|------|-------------------------------------------------------------------------|
| Input                    | Forward Voltage                      | V <sub>F</sub>       | —                    | 1.2                  | 1.4  | V    | I <sub>F</sub> =20mA                                                    |
|                          | Reverse Current                      | I <sub>R</sub>       | —                    | —                    | 10   | μA   | V <sub>R</sub> =4V                                                      |
|                          | Terminal Capacitance                 | C <sub>t</sub>       | —                    | 30                   | 250  | pF   | V=0, f=1KHz                                                             |
| Output                   | Collector Dark Current               | I <sub>CEO</sub>     | —                    | —                    | 1    | μA   | V <sub>CE</sub> =200V, I <sub>F</sub> =0                                |
|                          | Collector-Emitter Breakdown Voltage  | BV <sub>CEO</sub>    | 300                  | —                    | —    | V    | I <sub>C</sub> =0.1mA<br>I <sub>F</sub> =0                              |
|                          | Emitter-Collector Breakdown Voltage  | BV <sub>ECO</sub>    | 6                    | —                    | —    | V    | I <sub>E</sub> =10 μA<br>I <sub>F</sub> =0                              |
| Transfer Characteristics | Collector Current                    | I <sub>C</sub>       | 2                    | —                    | —    | mA   | I <sub>F</sub> =5mA                                                     |
|                          | *1 Current Transfer Ratio            | CTR                  | 40                   | —                    | —    | %    | V <sub>CE</sub> =5V                                                     |
|                          | Collector-emitter Saturation Voltage | V <sub>CE(sat)</sub> | —                    | 0.1                  | 0.3  | V    | I <sub>F</sub> =20mA<br>I <sub>C</sub> =1mA                             |
|                          | Isolation Resistance                 | R <sub>iso</sub>     | 5 × 10 <sup>10</sup> | 1 × 10 <sup>11</sup> | —    | Ω    | DC500V<br>40~60%R.H.                                                    |
|                          | Floating Capacitance                 | C <sub>f</sub>       | —                    | 0.6                  | 1    | pF   | V=0, f=1MHz                                                             |
|                          | Cut-off Frequency                    | f <sub>c</sub>       | —                    | 50                   | —    | kHz  | V <sub>CE</sub> =5V, I <sub>C</sub> =2mA<br>R <sub>L</sub> =100 Ω, -3dB |
|                          | Response Time (Rise)                 | t <sub>r</sub>       | —                    | 4                    | 10   | μs   | V <sub>CE</sub> =2V, I <sub>C</sub> =2mA<br>R <sub>L</sub> =100 Ω       |
|                          | Response Time (Fall)                 | t <sub>f</sub>       | —                    | 5                    | 12   | μs   |                                                                         |

\*1 CTR=  $\frac{I_C}{I_F} \times 100\%$

PHOTOCOUPLER

Typical Electrical/Optical Characteristic Curves  
(25°C Ambient Temperature Unless Otherwise Noted)

Fig.1 Forward Current vs.  
Ambient Temperature

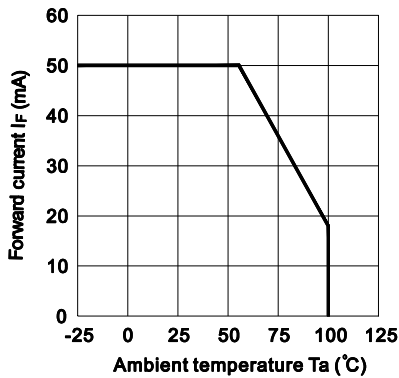


Fig.2 Collector Power Dissipation vs.  
Ambient Temperature

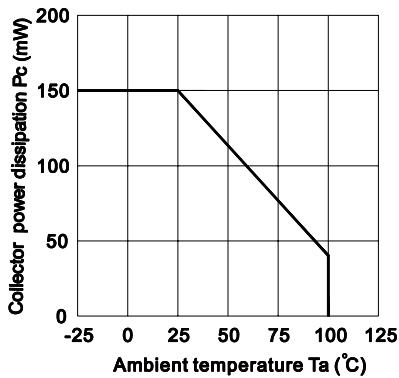


Fig.3 Collector-emitter saturation  
Voltage vs. Forward current

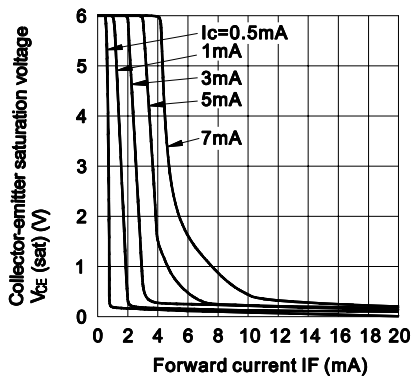


Fig.4 Forward Current vs. Forward  
Voltage

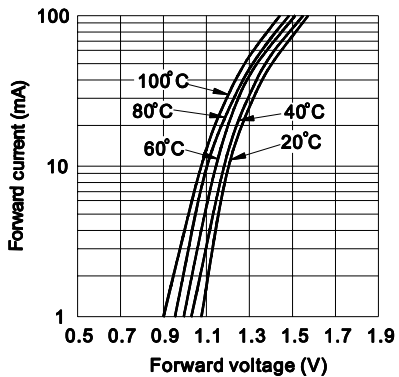


Fig.5 Current Transfer Ratio vs. Forward  
Current



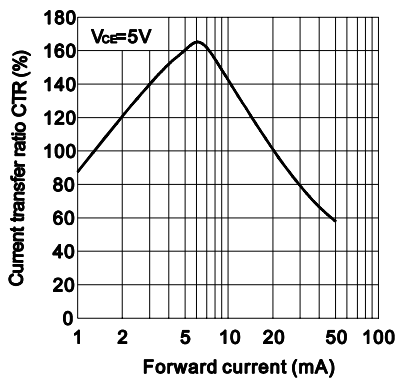



Fig.6 Collector Current vs.  
Collector-emitter Voltage

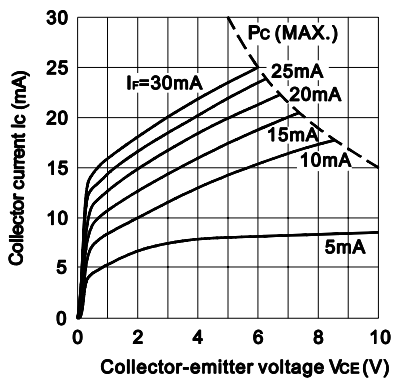


**Fig.7 Relative Current Transfer Ratio vs. Ambient Temperature**

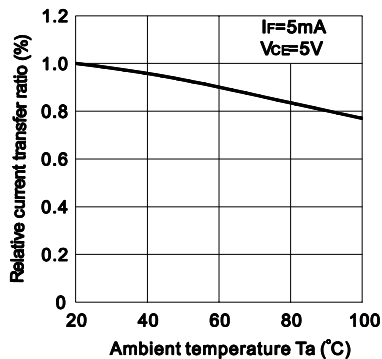


**Fig.8 Collector-emitter Saturation Voltage vs. Ambient Temperature**

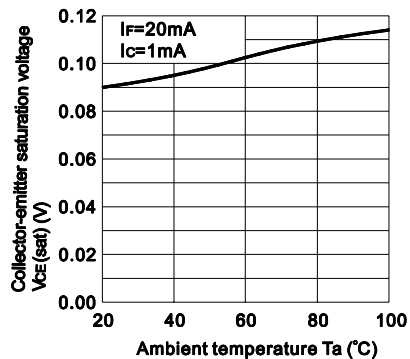


**Fig.9 Collector Dark Current vs. Ambient Temperature**

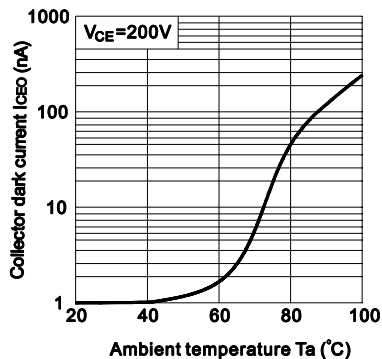


**Fig.10 Response Time vs. Load Resistance**

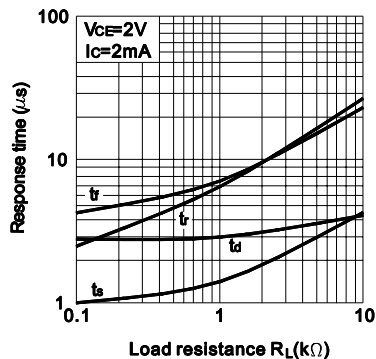

**Fig.11 Frequency Response**

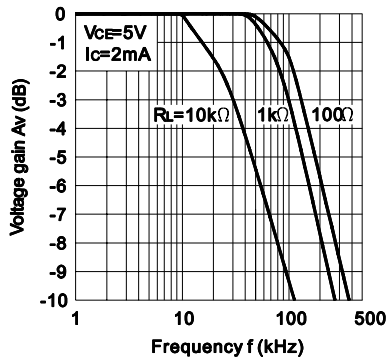

**Test Circuit for Response Time**

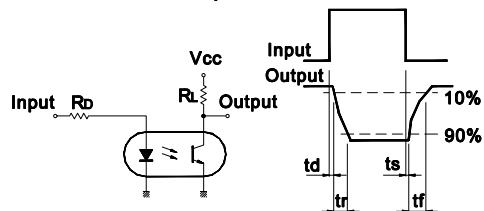

**Test Circuit for Frequency Response**

