

**ALPAC®**

SC3B483-01

SC3B483-02

SC3B483-03

**STANDARD RECOVERY 3-PHASE  
FULL WAVE BRIDGE RECTIFIERS****STANDARD RECOVERY, 25A, 3-PHASE FULL WAVE  
BRIDGE RECTIFIER ASSEMBLIES**


- Designed to MIL-S-19500/483
- Low forward voltage drop
- Low reverse leakage current
- Black anodised, aluminum case
- Low thermal impedance

**QUICK REFERENCE  
DATA**

- $V_R = 200V - 600V$
- $I_F = 25A$
- $V_F = 1.3V$
- $t_{rr} = 2.0\mu s$

**ABSOLUTE MAXIMUM RATINGS**

Device Type	Working Reverse Voltage $V_{RWM}$	Average Rectified Current $I_{F(AV)}$						1 Cycle Surge Current $I_{FSM}$ @ $t_p = 8.3ms$	
		@ case temperature			@ ambient temperature			@ 25°C	@ 100°C
		@ 55°C	@ 100°C	@ 125°C	@ 25°C	@ 55°C	@ 100°C	@ 25°C	@ 100°C
Volts	Amps	Amps	Amps	Amps	Amps	Amps	Amps	Amps	
SC3B483-01	200								
SC3B483-02	400	25	18.5	9.25	8	6	4	150	100
SC3B483-03	600								

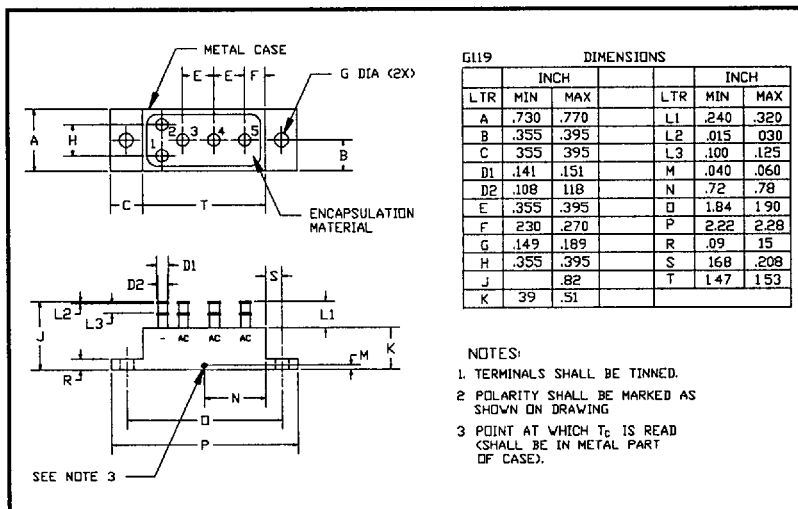**MECHANICAL**

These products are qualified to MIL-S-19500/483 and are preferred parts as listed in MIL-STD-701.

They can be supplied fully released in JANTX versions as

M19500/483-01

M19500/483-02

M19500/483-03 .

www.DataSheet4U.com

SC3B483-01  
 SC3B483-02  
 SC3B483-03

ALPAC®

# STANDARD RECOVERY 3-PHASE FULL WAVE BRIDGE RECTIFIERS

## ELECTRICAL CHARACTERISTICS

Device Type	Maximum Reverse Leakage Current $I_R$ @ $V_{RWM}$		Maximum Forward Voltage $V_F$ @ 39A/leg @ 25°C	Maximum Reverse Recovery Time $t_{rr}$ @ 25°C	Maximum operating & storage temp range.	
	@ 25°C	@ 100°C			$T_{OP}$	$T_{STG}$
	μA	μA	Volts	μS	°C	
SC3B483-01	2.0	200	1.3	2.0	- 65	
SC3B483-02					to	
SC3B483-03					+150	

<sup>1</sup> Measured on discrete devices prior to assembly

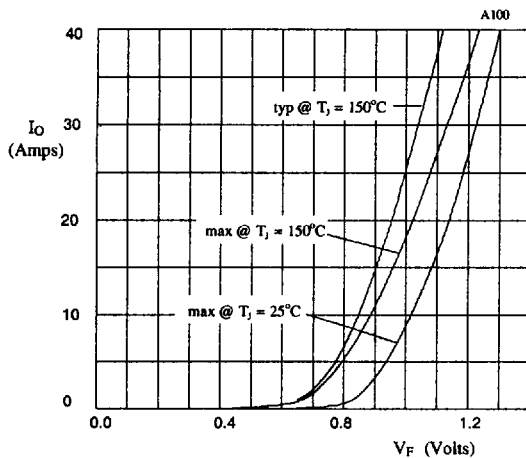


Fig 1. Forward voltage drop against output current per leg

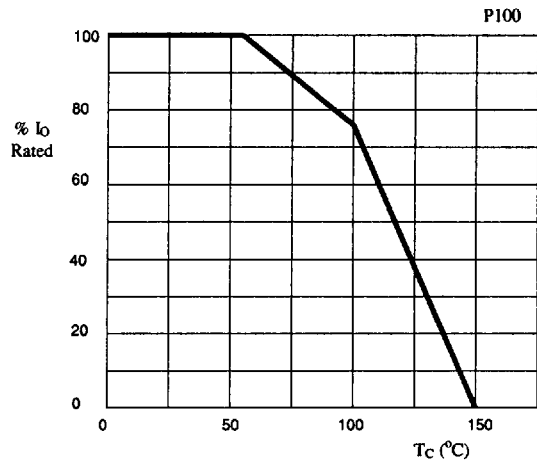


Fig 2. Output current derating curve