
HM629127H Series

131072-word × 9-bit High Speed CMOS Static RAM

HITACHI

Rev. 0.0
Dec. 1, 1995

Description

The HM629127H is an asynchronous high speed static RAM organized as 131,072-word × 9-bit. It realizes high speed access time (20/25 ns) with employing 0.8 μm CMOS process and high speed circuit designing technology. It is most appropriate for the application which requires high speed, high density memory and wide bit width configuration, such as cache and buffer memory in system. The HM629127H is packaged in 400-mil 32/36-pin SOJ for high density surface mounting.


Features

- Single 5 V supply: 5 V ± 10%
- Access time 20/25 ns (max)
- Completely static memory
No clock or timing strobe required
- Equal access and cycle times
- Directly TTL compatible
All inputs and outputs
- 400-mil 36-pin SOJ package
- Center V_{CC} and V_{SS} type pinout

Ordering Information

Type No.	Access Time	Package
HM629127HJP-20	20 ns	400-mil 36-pin Plastic SOJ (CP-36D)
HM629127HJP-25	25 ns	
HM629127HLJP-20	20 ns	
HM629127HLJP-25	25 ns	

HM629127H Series

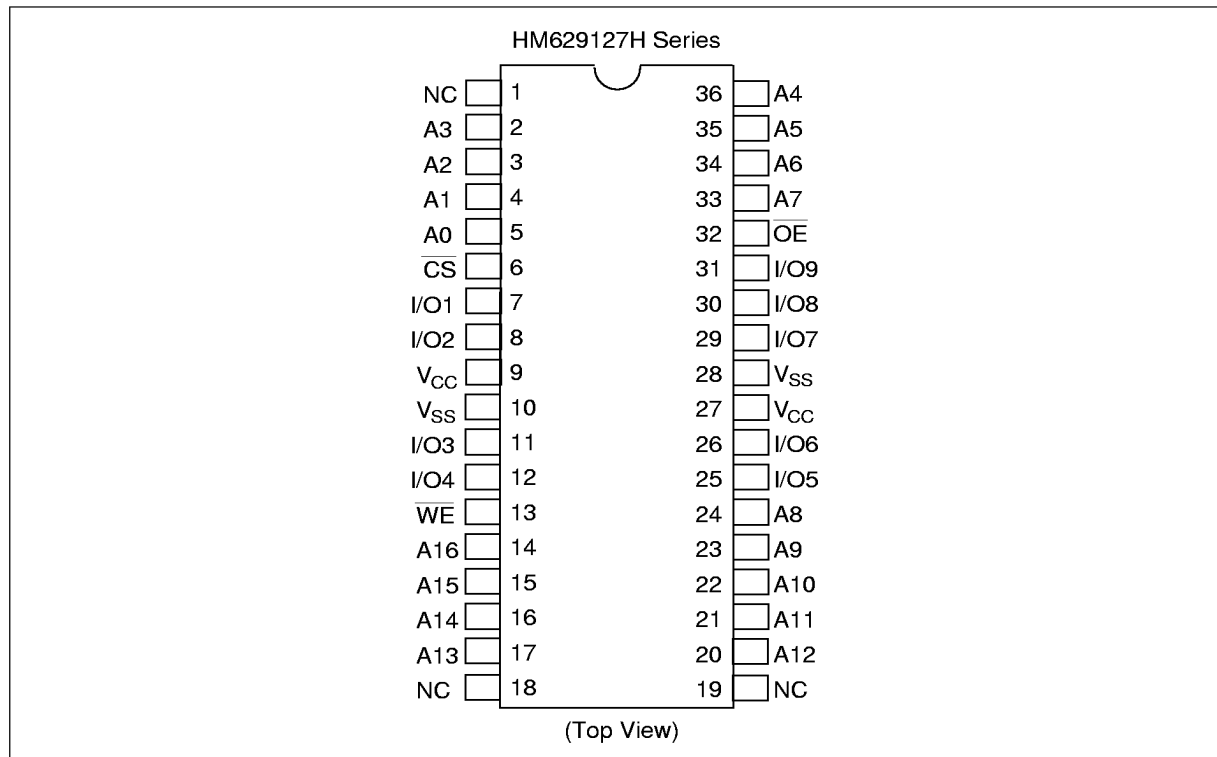


Pin Description

Pin name	Function
A0 – A16	Address
I/O1 – I/O9	Data input/output
$\overline{CS}$	Chip select
$\overline{WE}$	Write enable
$\overline{OE}$	Output enable
V _{CC}	Power supply
V _{SS}	Ground
NC	No connection

HITACHI

Block Diagram

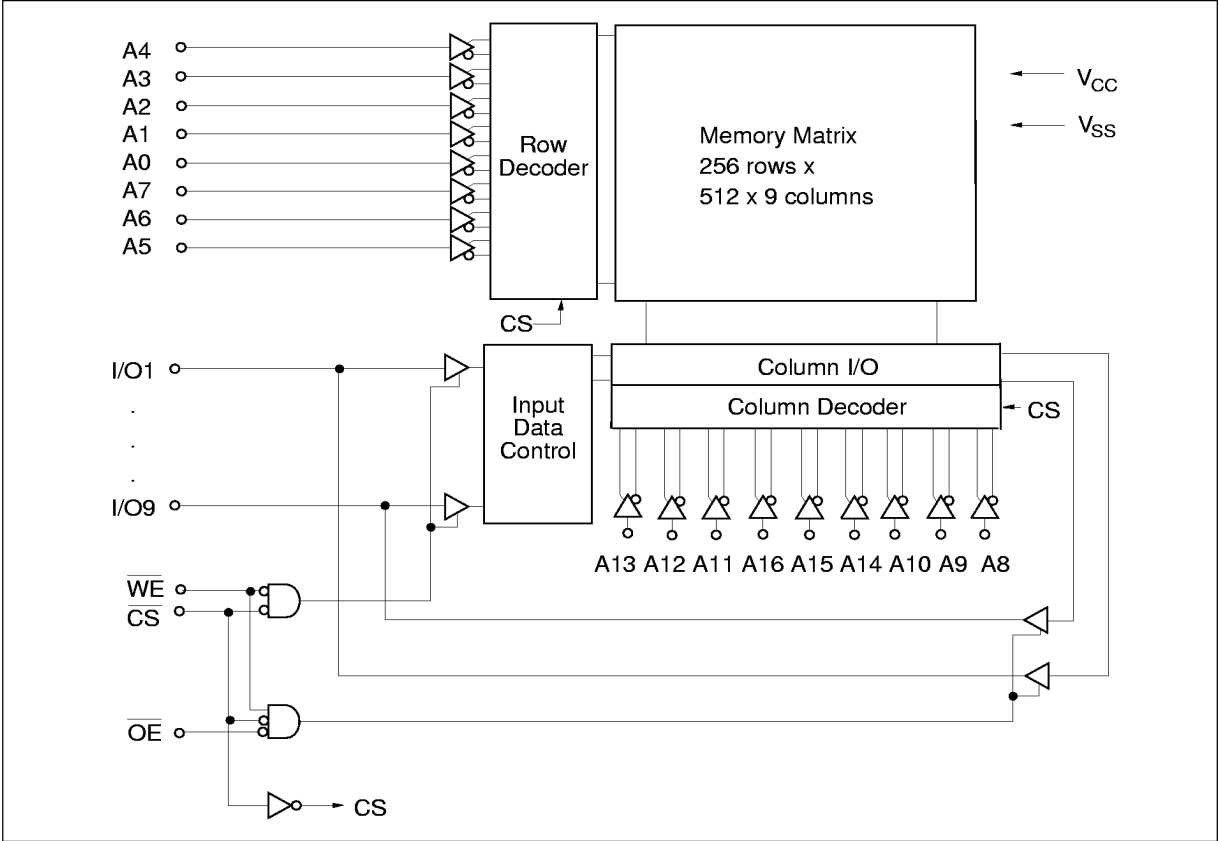

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply voltage relative to V_{SS}	V_{CC}	-0.5 to +7.0	V
Voltage on any pin relative to V_{SS}	V_T	-0.5 ¹ to $V_{CC} + 0.5$	V
Power dissipation	P_T	1.0 ² / 1.5 ³	W
Operating temperature	T_{opr}	0 to +70	°C
Storage temperature	T_{stg}	-55 to +125	°C
Storage temperature under bias	T_{bias}	-10 to +85	°C

Notes: 1. -2.5 V for pulse width (under shoot) ≤ 10 ns
2. at still air condition
3. at air flow ≥ 1.0 m/s

HM629127H Series

Function Table

$\overline{\text{CS}}$	$\overline{\text{OE}}$	$\overline{\text{WE}}$	V_{CC} Current	I/O	Ref. Cycle
H	X	X	$I_{\text{SB}}, I_{\text{SB1}}$	High-Z	—
L	H	H	I_{CC}	High-Z	—
L	L	H	I_{CC}	Output	Read cycle
L	X	L	I_{CC}	Input	Write cycle

Note: X: H or L

Recommended DC Operating Conditions ($T_a = 0$ to $+70^\circ\text{C}$)

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage ^{*2}	V_{CC}	4.5	5.0	5.5	V
	V_{SS}	0	0	0	V
Input voltage	V_{IH}	2.2	—	$V_{\text{CC}} + 0.5$	V
	V_{IL}	-0.5^{*1}	—	0.8	V

Notes: 1. -2.0 V for pulse width (under shoot) ≤ 10 ns
 2. The supply voltage with all V_{CC} pins must be on the same level.
 The supply voltage with all V_{SS} pins must be on the same level.

HITACHI

HM629127H Series

DC Characteristics ($T_a = 0$ to $+70^\circ\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$, $V_{SS} = 0\text{ V}$)

Parameter	Symbol	Min	Typ ¹	Max	Unit	Test Conditions	Note
Input leakage current	$ I_{LI} $	—	—	2	μA	$V_{in} = V_{SS}$ to V_{CC}	
Output leakage current	$ I_{LO} $	—	—	2	μA	$V_{IO} = V_{SS}$ to V_{CC}	
Operating power supply current	I_{CC}	—	130	180	mA	20 ns cycle	$\overline{CS} = V_{IL}$, $I_{out} = 0$ mA Other inputs = V_{IH}/V_{IL}
		—	100	160	mA	25 ns cycle	
Standby power supply current	I_{SB}	—	50	90	mA	20 ns cycle	$\overline{CS} = V_{IH}$, Other inputs = V_{IH}/V_{IL}
		—	40	85	mA	25 ns cycle	
Standby power supply current (1)	I_{SB1}	—	—	2	mA	$V_{CC} \geq \overline{CS} \geq V_{CC} - 0.2\text{ V}$, $0\text{ V} \leq V_{in} \leq 0.2\text{ V}$ or $V_{CC} \geq V_{in} \geq V_{CC} - 0.2\text{ V}$	
		—	—	0.2	mA		L-version
Output voltage	V_{OL}	—	—	0.4	V	$I_{OL} = 8\text{ mA}$	
	V_{OH}	2.4	—	—	V	$I_{OH} = -4\text{ mA}$	

Note: 1. Typical values are at $V_{CC} = 5.0\text{ V}$, $T_a = +25^\circ\text{C}$ and not guaranteed.

Capacitance ($T_a = 25^\circ\text{C}$, $f = 1.0\text{ MHz}$)^{*1}

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
Input capacitance	C_{in}	—	—	6	pF	$V_{in} = 0\text{ V}$
Input/output capacitance	C_{IO}	—	—	8	pF	$V_{IO} = 0\text{ V}$

Note: 1. This parameter is sampled and not 100% tested.


HITACHI

HM629127H Series

AC Characteristics ($T_a = 0$ to $+70^\circ\text{C}$, $V_{CC} = 5\text{ V} \pm 10\%$, unless otherwise noted.)

Test Conditions

- Input pulse levels: V_{SS} to 3.0 V
- Input rise and fall time: 3 ns
- Input and output timing reference levels: 1.5 V
- Output load: See figures

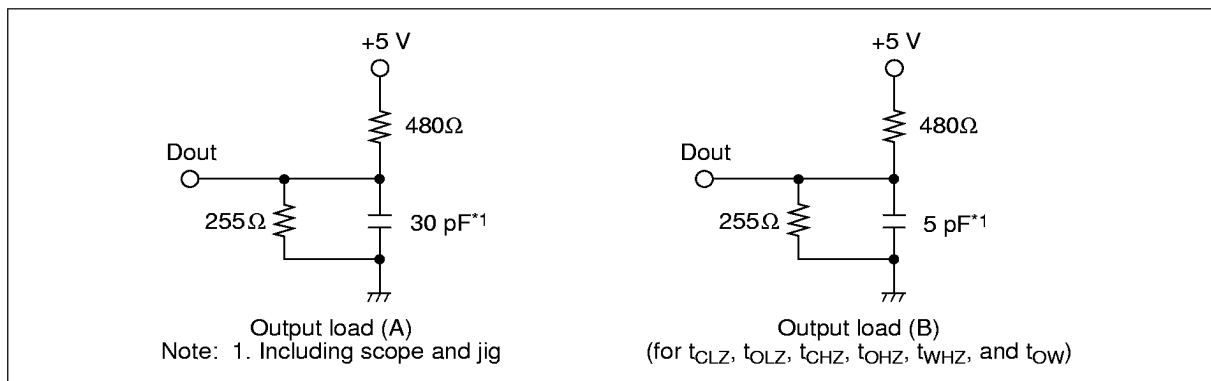


Read Cycle

HM629127H							
		-20		-25			
Parameter	Symbol	Min	Max	Min	Max	Unit	Note
Read cycle time	t_{RC}	20	—	25	—	ns	
Address access time	t_{AA}	—	20	—	25	ns	
Chip select access time	t_{ACS}	—	20	—	25	ns	
Output enable to output valid	t_{OE}	—	10	—	12	ns	
Output hold from address change	t_{OH}	5	—	5	—	ns	
Chip select to output in low-Z	t_{CLZ}	3	—	3	—	ns	1
Output enable to output in low-Z	t_{OLZ}	1	—	1	—	ns	1
Chip deselect to output in high-Z	t_{CHZ}	—	7	—	7	ns	1
Output disable to output in high-Z	t_{OHZ}	—	7	—	7	ns	1

Note: 1. Transition is measured $\pm 200\text{ mV}$ from steady voltage with Load (B). This parameter is sampled and not 100% tested.

HITACHI

Read Timing Waveform^{*3}

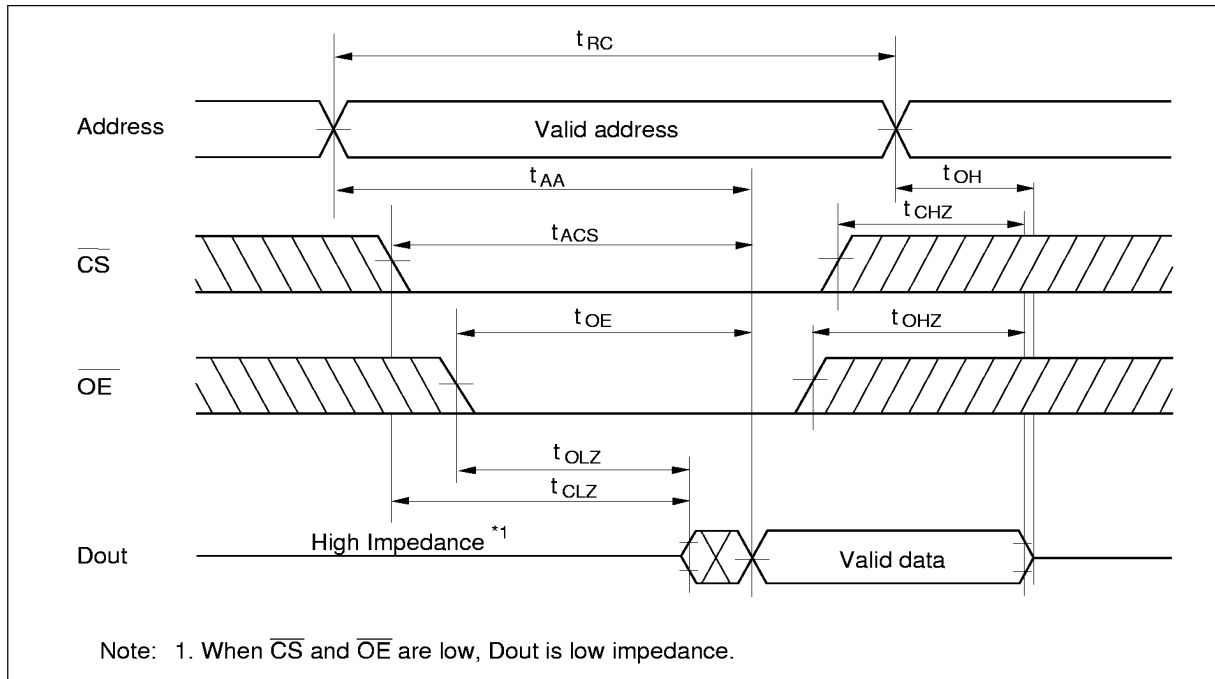

HM629127H Series


Write Cycle*1

HM629127H							
		-20		-25			
Parameter	Symbol	Min	Max	Min	Max	Unit	Notes
Write cycle time	t_{WC}	20	—	25	—	ns	
Address valid to end of write	t_{AW}	15	—	20	—	ns	
Chip select to end of write	t_{CW}	12	—	12	—	ns	
Write pulse width	t_{WP}	12	—	12	—	ns	
Address setup time	t_{AS}	0	—	0	—	ns	2
Write recovery time	t_{WR}	0	—	0	—	ns	3
Data to write time overlap	t_{DW}	10	—	10	—	ns	
Data hold from write time	t_{DH}	0	—	0	—	ns	
Write disable to output in low-Z	t_{OW}	3	—	3	—	ns	4
Write enable to output in high-Z	t_{WHZ}	—	7	—	7	ns	4

Notes: 1. A write occurs during the overlap of low $\overline{CS}$, low $\overline{WE}$.
 2. t_{AS} is measured from the latest address transition to the later of $\overline{CS}$ or $\overline{WE}$ going low.
 3. t_{WR} is measured from the earliest of $\overline{CS}$ or $\overline{WE}$ going high to the first address transition.
 4. Transition is measured ± 200 mV from high impedance state's voltage with Load (B). This parameter is sampled and not 100% tested.


HITACHI

Write Timing Waveform (1) ($\overline{WE}$ Controlled)

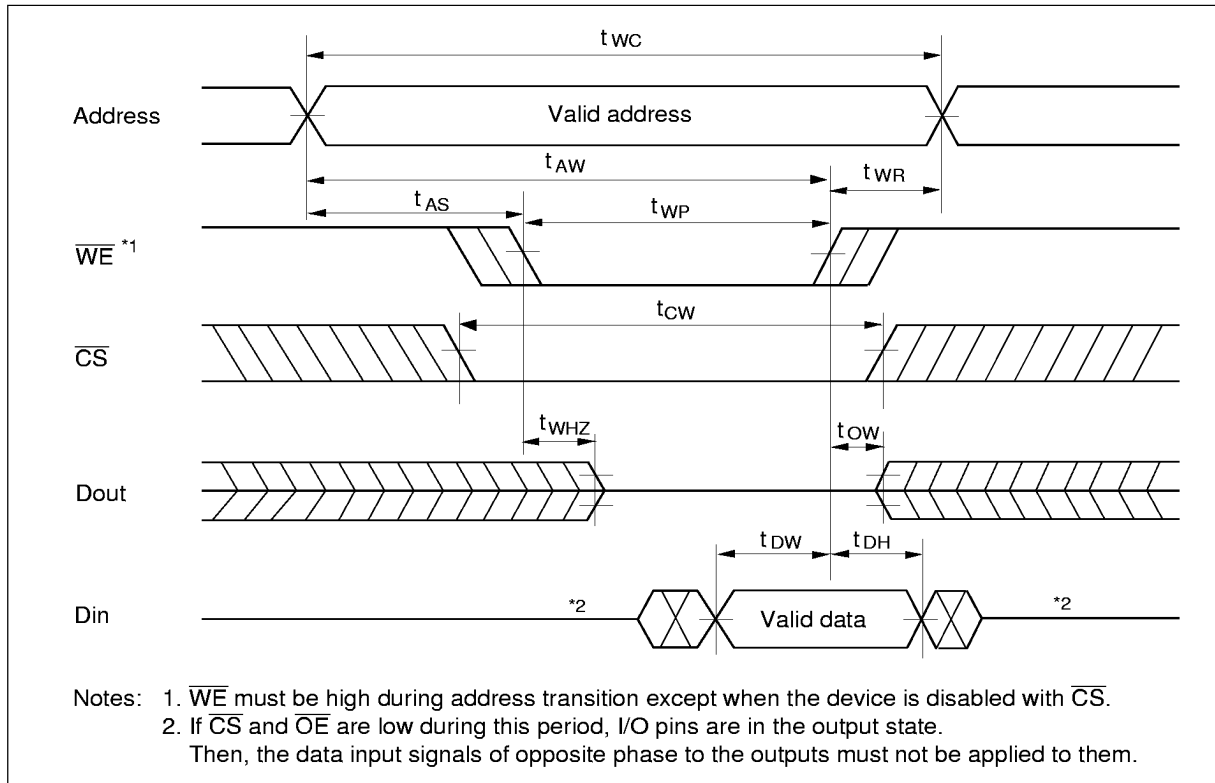

HM629127H Series

Write Timing Waveform (2) ($\overline{\text{CS}}$ Controlled)

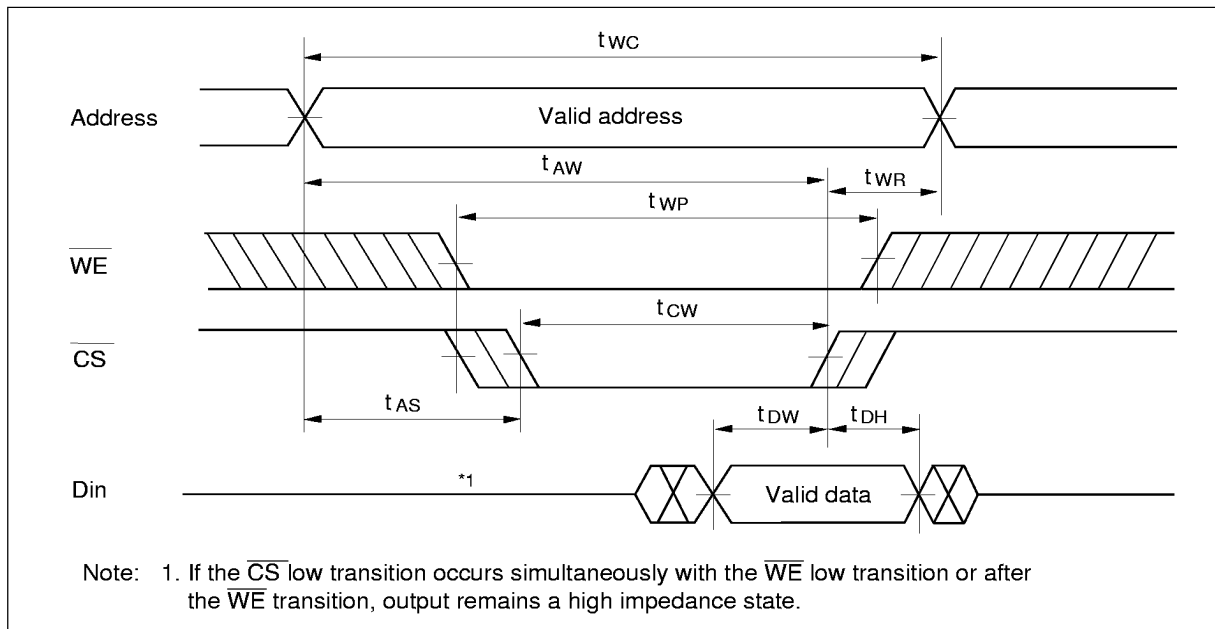


Low V_{CC} Data Retention Characteristics ($T_a = 0$ to $+70^{\circ}\text{C}$)

This characteristics is guaranteed only for L-version.

Parameter	Symbol	Min	Typ	Max	Unit	Test Conditions
V_{CC} for data retention	V_{DR}	2.0	—	—	V	$V_{CC} \geq \overline{CS} \geq V_{CC} - 0.2\text{ V}$, $V_{CC} \geq V_{in} \geq V_{CC} - 0.2\text{ V}$ or $0\text{ V} \leq V_{in} \leq 0.2\text{ V}$
Data retention current	I_{CCDR}	—	2	80^{*1}	μA	
Chip deselect to data retention time	t_{CDR}	0	—	—	ns	
Operation recovery time	t_R	5	—	—	ms	

Note: 1. $V_{CC} = 3.0\text{ V}$

Low V_{CC} Data Retention Timing Waveform

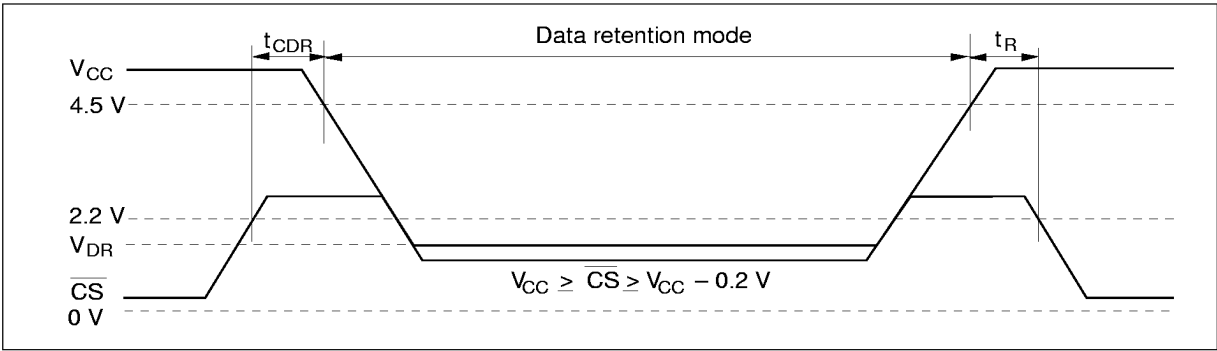


HM629127H Series

Package Dimensions

HM629127H Series (CP-36D)

Unit: mm

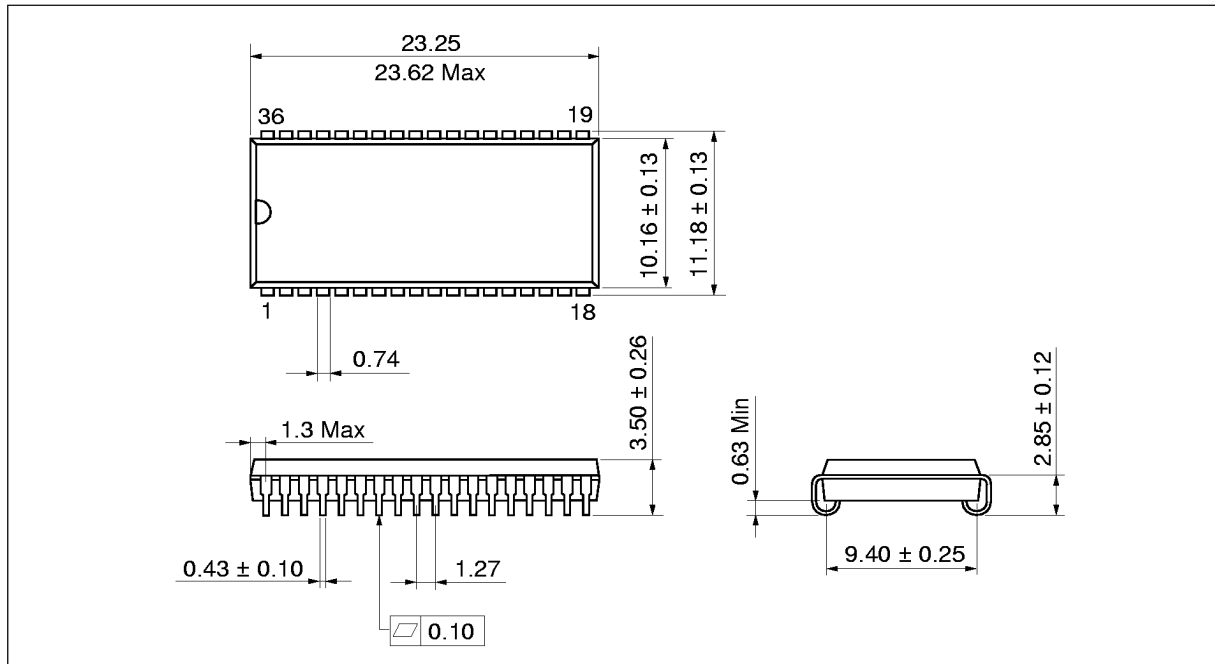

HITACHI

12