

OS-50 (2.4 mm) Terminations

dc – 50 GHz

850X-6119-02


V2.00

Frequency:
dc-50 GHz


Power:
0.5 Watts Average

Finish:
Passivated stainless steel

OS-50 (2.4 mm)
Figure 1

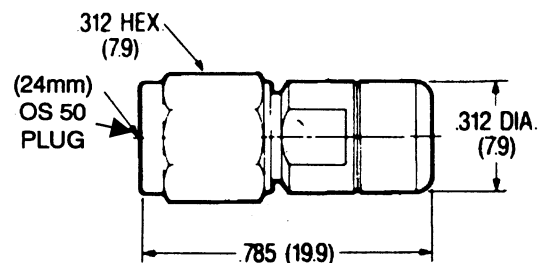


Typical Power Derating

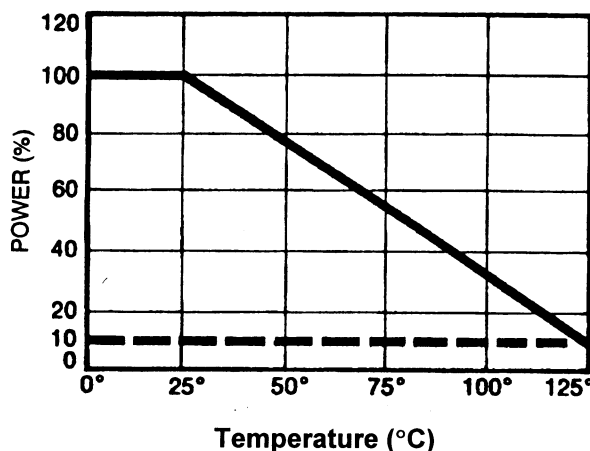

All SMA standard model terminations are 50 Ohms and are derated linearly to 10% power at 125°C. Operating temperature range is -54° to +125°C.

Figure 2

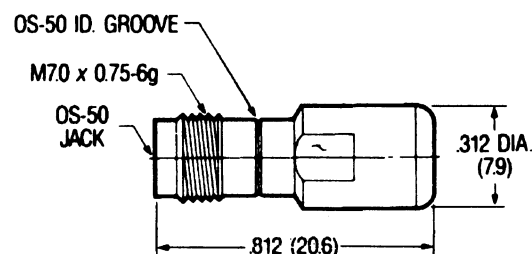

Ordering Information

Part Number Plug	Figure	Part Number Jack	Figure	VSWR dc-18 GHz	VSWR 18-26.5 GHz	VSWR 26.5-50 GHz
8501-6119-02	1	8502-6119-02	2	1.10	1.15	1.30