


■ FEATURES

- 85°C, 2000 hours assured.
- 5.5mm height
- Bipolar capacitor, replaces RVB Series
- RoHS Compliant



■ SPECIFICATIONS

Item	Performance							
Operating Temp. Range	-40°C ~ + 85°C							
Capacitance Tolerance	± 20% (120Hz, 20°C)							
Leakage Current (at 20°C)	$I = 0.01CV$ or $3 \mu A$ (whichever is greater) after 2 minutes Where C=rated capacitance in μF . Voltage=rated DC working voltage in V.							
Dissipation Factor Tan δ at 120 Hz, 20°C	Rated Voltage			6.3	10	16	25	
	Tan δ (max)	4 φ	0.35	0.30	0.25	0.25	0.25	
		5 ~ 6.3 φ	0.30	0.25	0.20	0.15	0.15	
Low Temperature Characteristics (at 120Hz)	Rated Voltage			6.3	10	16	25	
	Impedance Ratio	Z(-25°C) / Z(+20°C)	3	3	2	2	2	
		Z(-40°C) / Z(+20°C)	8	5	4	3	3	
Life Test	Test Time			Load Life			Shelf Life	
				2000 Hrs			1000 Hrs	
	Capacitance Change			Within ±20% of initial value			Within ± 20% of initial value	
	Dissipation Factor			Less than 200% of specified value			Less than 200% of specified value	
	Leakage Current			Within specified value			Within specified value	
	Test Conditions			20°C (after rated voltage applied for 2000 hours at 85°C)			20° C (after storage for 1000 hours at 85°C without voltage)	
	VDC(V)	Freq. (Hz)	50	120	1K	10K up	Ripple Current & Temperature (°C)	
Ripple Current & Frequency Multipliers	Under 16	0.80	1.00	1.15	1.25	Temperature Multipliers	Under 70	85
	25 ~ 35	0.80	1.00	1.25	1.40		Multipliers	1.35
	50	0.80	1.00	1.35	1.50			1.00
Standards	JIS C 5101-1,-18							


■ DIMENSION & PERMISSIBLE RIPPLE CURRENT

Ripple Current mA/rms at 120 Hz, 85°C

μF Contents	VDC	6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)	
		φD	x L	mA	φD	x L	mA	φD	x L	mA	φD	x L	mA
0.1	0R1												4 x 5.3 2.3
0.22	R22												4 x 5.3 3.3
0.33	R33												4 x 5.3 4.1
0.47	R47												4 x 5.3 4.9
1	010												4 x 5.3 7.2
2.2	2R2										4 x 5.3	10	5 x 5.3 14
3.3	3R3							4 x 5.3	13	5 x 5.3	17	5 x 5.3	17
4.7	4R7				4 x 5.3	14	5 x 5.3	20	5 x 5.3	21	6.3 x 5.3	24	
10	100			4 x 5.3	18	5 x 5.3	26	6.3 x 5.3	35	6.3 x 5.3	35		
22	220	5 x 5.3	27	6.3 x 5.3	40	6.3 x 5.3	45						
33	330	6.3 x 5.3	45	6.3 x 5.3	50	6.3 x 5.3	55						
47	470	6.3 x 5.3	54										

■ PAD SPACING AND DIAMETER

φD±0.5	L	A±0.2	B±0.2	C±0.2	W	P±0.2
4	5.3±0.2	4.3	4.3	2.0	0.5 to 0.8	1.0
5	5.3±0.2	5.3	5.3	2.3	0.5 to 0.8	1.5
6.3	5.3±0.2	6.6	6.6	2.7	0.5 to 0.8	2.0

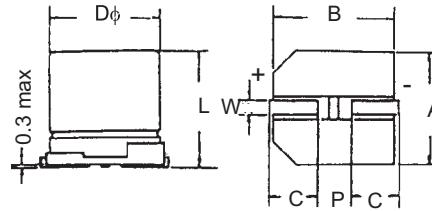

■ PART NUMBER EXAMPLE VEB 100 M 1E TR 063 053