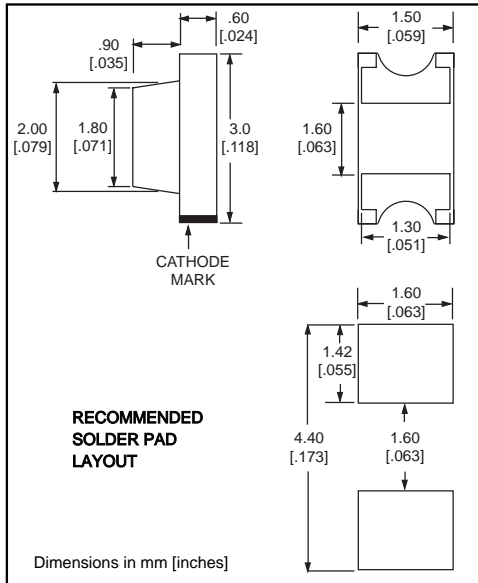
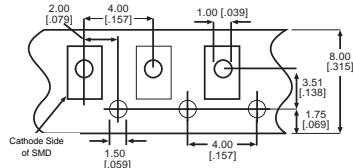


microLED[®]**Surface Mount LED
1206 Type Package****Dialight****597-3xx1-4xx****TAPING SPECIFICATIONS**
(rear side of tape)**Features**

- Compatible with automatic placement equipment
- Compatible with infrared reflow processes
- Packaged on 8mm tape, 7" reels (meets EIA-481-1 standard)
- Helps to eliminate mixed technology PC board processing
- Compatible with Dialight's Optopipe™ Series light pipes

PART NO.* COLOR

597-3111-4xx	AlGaAs Red
597-3201-4xx	Orange
597-3311-4xx	Green
597-3401-4xx	Yellow

ORDERING INFORMATION*597-3xx1-4xx**

packaging option

02	20 pieces on tape
07	7" reel, 2500 pcs/reel

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$)

	AlGaAs Red -3111	Orange -3201	Green -3311	Yellow -3401
Power Dissipation (mW)	60	75	75	75
Forward Current (mA)	30	30	30	30
Derating (mA/°C)	.42	.42	.42	.42
Peak Current (mA) <i>Pulse width = 1 μs</i>	70	70	70	70
Operating Temperature (°C)	-30/+85	-30/+85	-30/+85	-30/+85
Storage Temperature (°C)	-30/+90	-40/+100	-30/+90	-30/+90
Soldering Profile	240°C peak 5 seconds			

Solder Adherence per MIL-STD-202E, Method 208C

OPERATING CHARACTERISTICS ($T_A=25^\circ\text{C}$)

		AlGaAs Red -3111	Orange -3201	Green -3311	Yellow -3401
Luminous Intensity (mcd)	Min.	6	5	3	3
	Typical	17	9	7.5	6
Peak Wavelength (nm) λ_{Peak}	Typical	660	605	560	580
Viewing Angle ($2\theta_{1/2}$)	Typical	70°	70°	70°	70°
Forward Voltage (V)	Typical	1.7	2.2	2.1	2.2
	Max.	2	2.5	2.5	2.5
Reverse Voltage (V), $I_R=100\mu\text{A}$	Min.	4	4	4	4

 $\theta_{1/2}$ is the off axis angle at which the luminous intensity is half the axial luminous intensity