



CD 294 BW Series

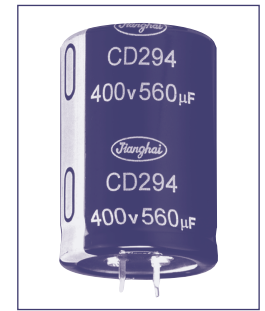

4000 at 105°C

- Standard 105°C
- General Industry

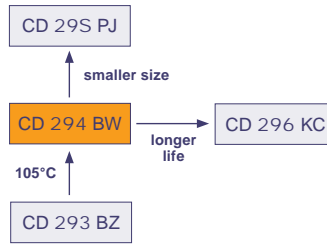


Item	Characteristics	
Operating Temperature Range (°C)	-40 ~ +105	-25 ~ +105
Voltage Range (V)	16 ~ 100	160 ~ 500
Capacitance Range (µF)	39 ~ 47 000	
Capacitance Tolerance (20°C, 120Hz)	± 20%	
Leakage Current (µA)	After 5 minutes at 20°C application of rated voltage, leakage current is not more than 0,01CV or 1,5mA, whichever is smaller C: Nominal Capacitance (µF) V: Rated Voltage (V)	
Dissipation Factor (20°C, 120Hz)	Rated Voltage (V)	16 25 35 50 63-100 160-400 450-500
	Tan δ (max)	0,50 0,40 0,35 0,30 0,20 0,15 0,20
Stability at Low Temperature (Impedance Ratio at 120Hz)	Rated Voltage (V)	16-100 160-200 250-500
	Z _{-25°C} / Z _{+20°C}	4
	Z _{-40°C} / Z _{+20°C}	15 -

	Useful Life		Load Life	Endurance Test	Shelf Life
Lifetime	4 000h	>180 000h	2 000h	3 000h	1 000h
Leakage Current	Not more than specified value		Not more than specified value	Not more than specified value	Not more than specified value
Capacity Change	Within ± 30% of initial value		Within ± 20% of initial value	Within ± 20% of initial value	Within ± 20% of initial value
Dissipation Factor	Not more than 300% of specified value		Not more than 200% of specified value	Not more than 130% of specified value	Not more than 200% of specified value
Condition:					
Applied Voltage	U _R	U _R	U _R	U _R	U _R = 0
Applied Current	I _R	1,4 x I _R	I _R	I _R = 0	I _R = 0
Applied Temperature	105°C	40°C	105°C	105°C	105°C
Failure Rate Level	≤ 1% Failure Rate	≤ 1% Failure Rate	guaranteed		After test: U _R to be applied for 30min >24h before measurement

Multiplier for Ripple Current

Frequency Coefficient

Rated Voltage (V)	Frequency					
	50Hz	120Hz	1kHz	10kHz	20kHz	100kHz
≤ 100	0,95	1,00	1,10	1,15	1,15	1,20
160 ~ 250	0,87	1,00	1,11	1,18	1,20	1,40
≥ 350	0,80	1,00	1,14	1,14	1,20	1,65

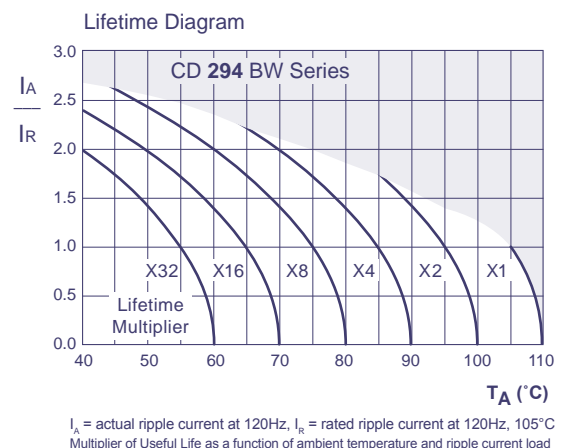

Snap-In

Ratings for CD 294 BW Series

V _{DC} (Surge Voltage) Code	Rated Capa- citan- ce	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Max Ripple Current 105°C, 120Hz	Size Ø D x L
(V)	(µF)	(mΩ)	(mΩ)	(Arms)	(mm)
16 (20) 1C	6800	98	69	1,60	22 x 25
		67	47	1,99	22 x 30
	10000	67	47	1,99	25 x 25
		56	39	2,28	22 x 35
	12000	56	39	2,30	25 x 30
		56	39	2,38	30 x 25
	15000	45	31	2,64	22 x 40
		45	31	2,68	25 x 35
	18000	37	26	2,98	22 x 45
		37	26	3,04	25 x 40
		37	26	3,00	30 x 30
		37	26	3,10	35 x 25
		31	22	3,40	25 x 45
		31	22	3,39	30 x 35
	22000	25	18	3,81	25 x 50
		25	18	3,83	30 x 40
		25	18	3,74	35 x 30
	27000	21	15	4,30	30 x 45
21		15	4,24	35 x 35	
18		12	4,74	30 x 50	
39000	18	12	4,72	35 x 40	
	15	10	5,27	35 x 45	
25 (32) 1E	4700	113	80	1,55	22 x 25
		79	55	1,91	22 x 30
	6800	79	55	1,91	25 x 25
		65	46	2,14	22 x 35
	8200	65	46	2,16	25 x 30
		65	46	2,25	30 x 25
	10000	54	38	2,40	22 x 40
		54	38	2,44	25 x 35
	12000	45	31	2,69	22 x 45
		45	31	2,74	25 x 40
		45	31	2,70	30 x 30
	15000	45	31	2,80	35 x 25
		36	25	3,15	25 x 45
		36	25	3,13	30 x 35
	18000	36	25	3,22	35 x 30
		30	21	3,54	25 x 50
		30	21	3,54	30 x 40
	22000	25	17	4,24	30 x 45
25		17	3,96	35 x 35	
27000	20	14	4,75	35 x 45	
	33000	17	12	5,39	35 x 50
35 (44) 1V	3300	141	99	1,43	22 x 25
		3900	120	84	1,65
	4700	99	70	1,78	25 x 25
		83	59	2,02	22 x 35
	5600	83	59	2,04	25 x 30
		83	59	2,12	30 x 25
	6800	69	48	2,28	22 x 40
		69	48	2,31	25 x 35
	8200	57	40	2,67	22 x 50
		57	40	2,60	25 x 40
		57	40	2,56	30 x 30
	10000	57	40	2,78	35 x 25
		47	33	2,92	25 x 45
	12000	47	33	2,92	30 x 35
		39	28	3,26	25 x 50
		39	28	3,28	30 x 40
	15000	39	28	3,20	35 x 30
		31	22	3,74	30 x 45
31		22	3,69	35 x 35	
18000	26	19	4,16	35 x 40	
	22000	22	15	4,92	35 x 50
50 (63) 1H	1800	222	155	1,31	22 x 25
		2200	181	127	1,45
	2700	148	104	1,70	22 x 30
		148	104	1,70	25 x 25
	3300	121	85	1,98	22 x 35
		121	85	2,00	25 x 30
	3900	103	72	2,25	22 x 40
		103	72	2,28	25 x 35
	4700	103	72	2,22	30 x 25
		85	60	2,56	22 x 45
	5600	85	60	2,58	30 x 30
		85	60	2,67	35 x 25
		72	50	2,89	22 x 50
	6800	72	50	2,81	25 x 40
		72	50	2,95	30 x 35
		59	41	3,37	25 x 50
		59	41	3,39	30 x 40
		59	41	3,31	35 x 30

V _{DC} (Surge Voltage) Code	Rated Capa- citan- ce	Max ESR 20°C, 120Hz	Typ ESR 20°C, 120Hz	Max Ripple Current 105°C, 120Hz	Size Ø D x L
(V)	(µF)	(mΩ)	(mΩ)	(Arms)	(mm)
50 (63) 1H	8200	49	34	3,71	30 x 45
		49	34	3,66	35 x 35
	10000	40	28	4,09	30 x 50
		40	28	4,07	35 x 40
	12000	34	24	4,50	35 x 45
		1200	222	155	1,25
	1800	148	104	1,52	22 x 30
		148	104	1,52	25 x 25
	2200	121	85	1,73	22 x 35
		121	85	1,75	25 x 30
	2700	99	69	1,97	22 x 40
		99	69	1,99	25 x 35
3300	99	69	1,93	30 x 25	
	81	57	2,32	22 x 50	
	81	57	2,27	25 x 40	
	81	57	2,24	30 x 30	
	81	57	2,41	35 x 25	
	68	48	2,54	25 x 45	
3900	68	48	2,55	30 x 35	
	57	40	2,88	25 x 50	
4700	57	40	2,90	30 x 40	
	57	40	2,83	35 x 30	
5600	48	34	3,28	30 x 45	
	48	34	3,24	35 x 35	
6800	40	28	3,73	30 x 50	
	40	28	3,71	35 x 40	
8200	33	23	4,16	35 x 45	
	10000	27	19	4,69	35 x 50
63 (79) 1J	820	324	227	1,11	22 x 25
		1000	266	186	1,25
	1200	222	155	1,39	22 x 30
		222	155	1,39	25 x 25
	1500	177	124	1,61	22 x 35
		177	124	1,62	25 x 30
	1800	148	104	1,83	22 x 40
		148	104	1,81	30 x 25
	2200	121	85	2,09	22 x 45
		121	85	2,01	25 x 35
		121	85	2,10	30 x 30
	2700	121	85	2,17	35 x 25
99		69	2,43	25 x 45	
3300	99	69	2,43	30 x 35	
	81	57	2,76	25 x 50	
3900	81	57	2,78	30 x 40	
	81	57	2,71	35 x 30	
4700	69	48	3,12	30 x 45	
	69	48	3,07	35 x 35	
5600	57	40	3,56	30 x 50	
	57	40	3,50	35 x 40	
6800	48	34	3,87	35 x 45	
	40	28	4,19	35 x 50	
80 (100) 1K	560	474	332	1,07	22 x 25
		820	324	227	1,35
	820	324	227	1,35	25 x 25
		324	227	1,35	25 x 25
	1000	266	186	1,54	22 x 35
		266	186	1,56	25 x 30
	1200	222	155	1,74	22 x 40
		222	155	1,76	25 x 35
		222	155	1,71	30 x 25
	1500	177	124	1,99	22 x 45
		177	124	2,03	25 x 40
		177	124	2,00	30 x 30
1800	177	124	2,07	35 x 25	
	148	104	2,28	25 x 45	
2200	148	104	2,27	30 x 35	
	121	85	2,57	25 x 50	
2700	121	85	2,59	30 x 40	
	121	85	2,52	35 x 30	
3300	99	69	2,94	30 x 45	
	99	69	2,90	35 x 35	
3900	81	57	3,32	30 x 50	
	81	57	3,31	35 x 40	
4700	69	48	3,69	35 x 45	
	69	48	4,14	35 x 50	
100 (125) 2A	330	603	423	1,16	22 x 25
		390	511	358	1,43
	470	424	297	1,52	22 x 35
		424	297	1,55	25 x 25
	560	356	249	1,62	22 x 40
		356	249	1,73	25 x 30

Snap-In


Custom products are available on request.

Order Code SMD, Radial, Snap-In

EC	R	1C	PT	101	M	FF	25	0611	JE xxxxx
Technology	Terminal Type	Rated Voltage Code	Series Code	Capacitance Code (in μF)	Capacitance Tolerance	Lead Form	Terminal/Pitch Size	Dimension	for Specials only
EC = Electrolytic Capacitor	SMD = V	For coding please refer to the pages of ratings	CD VS = BS	0,47 = R47	$\pm 20\%$ = M	SMD:		4x7 = 0407	
	Radial = R		CD VH = VH	1,0 = 010	$\pm 10\%$ = K	Taped = FF	Terminal = T2	5x11,5 = 0511	
PC = Polymer Capacitor	Snap-In = S		CD VZ = VZ	2,2 = 2R2	+30 / -10% = Q	Radial:		6,3x11,5 = 0611	
			CD 261 = LK	100 = 101	+50 / -10% = T	Long Lead = LL	2,0mm = 20	35x80 = 3580	
			CD 261X = QX	1000 = 102		Cut 5,0mm = CB	2,5mm = 25	45x100 = 45100	
			CD 262 = QM	10000 = 103		Cut 4,5mm = CC	3,5mm = 35		
			CD 263 = BK			Cut 4,0mm = CD	5,0mm = 50		
			CD 269 = PH			Cut 3,5mm = CE	7,5mm = 75		
			CD 281 = LL			Cut 3,0mm = CF	10,0mm = 10		
			CD 284 = XY			on request: alternative lead forms (axial, 90° - angle, others)		12,5mm = 12	
		CD 287 = GC			Snap-In:				
		CD 28L = QL			4,0mm Pin Length = T4	2 Pin = P2			
		CD 293 = BZ			6,3mm Pin Length = T6	3 Pin = P3			
		CD 294 = BW			Soldering Pin = S4	4 Pin = P4			
		CD 295 = BC				5 Pin = P5			
		CD 296 = KC			preferred				
		CD 297 = BB							
		CD 299 = PG							
		CD 29D = HR							
		CD 29H = QH							
		CD 29L = QL							
		HCP = CP							
		HPM = PM							
		HVC = VC							

Technical Specification SMD Type


Dimensions

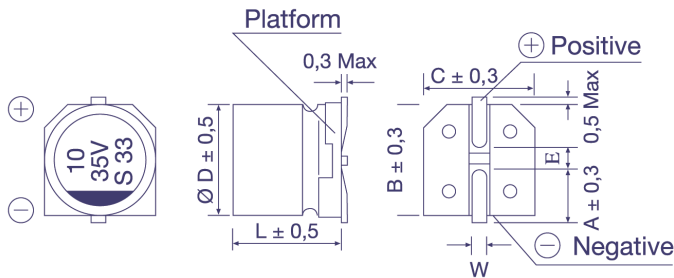

Ø D x L	4x5,4	5x5,4	6,3x5,4	6,3x7,7	8x10,5	8x11,8	10x10,5	10x12,7
A	1,8	2,1	2,4	2,5	2,9	2,9	3,2	3,2
B	4,3	5,3	6,6	6,6	8,3	8,4	10,3	10,4
C	4,3	5,3	6,6	6,6	8,3	8,4	10,3	10,4
E	1,0	1,3	2,2	2,2	3,1	3,1	4,5	4,5
L	5,4	5,4	5,4	7,7	10,5	11,8	10,5	12,7
W	0,5 - 0,8				0,7 - 1,1			

in mm


Taping Dimensions

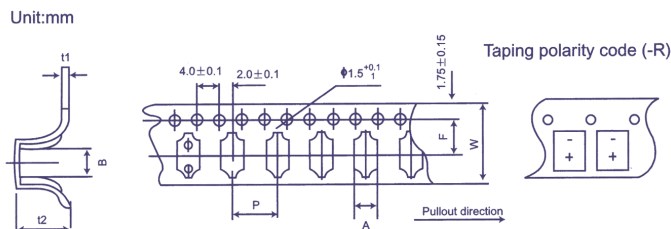

Size (DxL)	w ± 0,3	A ± 0,2	B ± 0,2	P ± 0,1	t2 ± 0,2	F ± 0,1	t1 ± 0,1
4 x 5,4	12,0	5,0	5,0	8,0	5,8	5,5	0,4
5 x 5,4	12,0	6,0	6,0	12,0	5,8	5,5	0,4
6,3 x 5,4	16,0	7,0	7,0	12,0	5,8	7,5	0,4
6,3 x 7,7	16,0	7,0	7,0	12,0	8,4	7,5	0,4
8 x 10,5	24,0	8,7	8,7	16,0	11,0	11,5	0,5
8 x 11,8	24,0	8,7	8,7	16,0	12,3	11,5	0,5
10 x 10,5	24,0	10,7	10,7	16,0	11,0	11,5	0,5
10 x 12,7	24,0	10,7	10,7	16,0	14,0	11,5	0,5


in mm

Soldering Profile (Aluminium Electrolytic Capacitors)

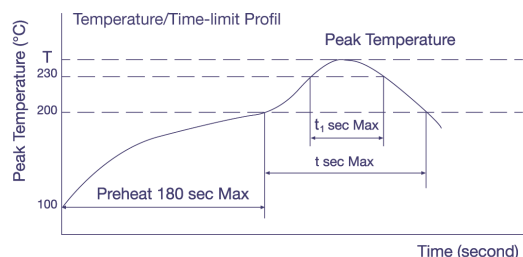

Diameter	w	D
4; 5	14 ± 1	50 ± 1
6,3	18 ± 1	50 ± 1
8; 10	25 ± 1	50 ± 1
Polymer	25 ± 1	80 ± 1

in mm

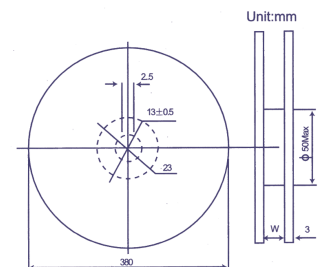


Allowable Range of Peak Temperature

Size	T (°C)	t (second)	t ₁ (second)
Ø 4 ~ 6,3	250	90	40
Ø 8 x 10,5	240	90	30
Ø 10 x 10,5	235	60	30

For more details or Soldering Profiles of Radials or Polymer-Capacitors please contact our local Sales Offices.


Technical Specification Snap-In Type

Pin Type: Snap-In
Order Code: T6, T4

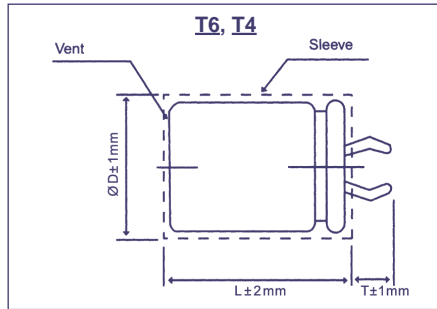


Terminal	T6	T4
Pin Length T	6,3	4,0


Pin Type: Soldering
Order Code: S4

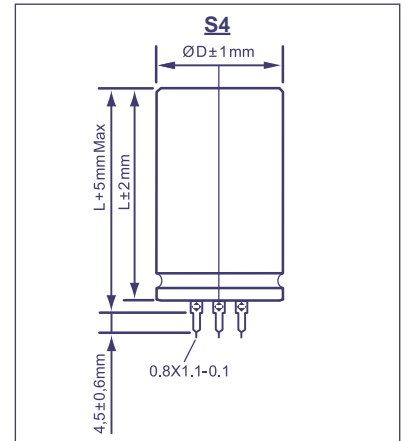

Snap-In Terminal
Order Code: P2, P3, P4

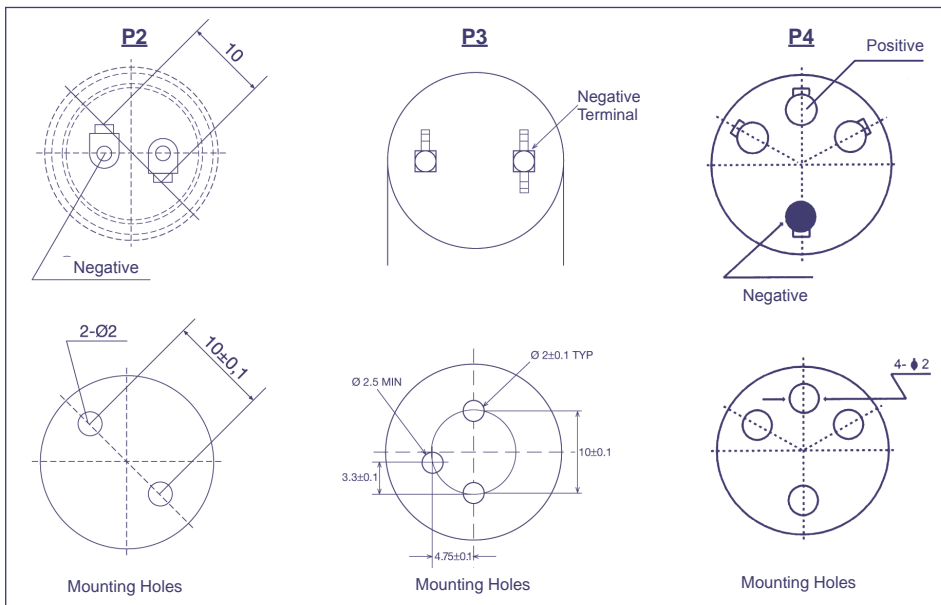

Soldering Terminal
Order Code: P5

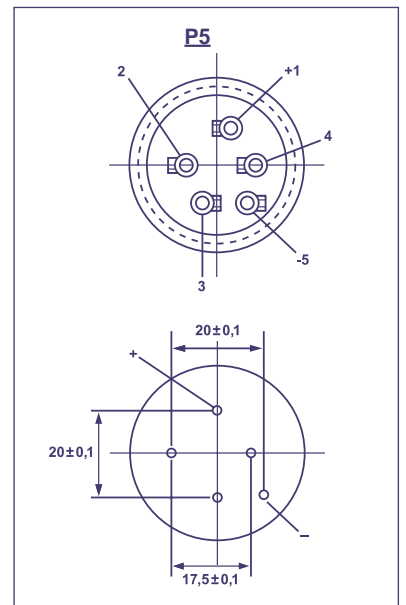

P3 only T4 Terminal



Order Code Screw Type

EC	G	1C	BP	101	M	B	E	160	A361	JExxxxx
Technology	Terminal Type	Rated Voltage Code	Series Code	Capacitance Code	Capacitance Tolerance	Mounting	Diameter	Length	For Terminal Code see tables below	for Specials only
EC = Electrolytic Capacitor	Screw = G	For coding please refer to the pages of ratings	CD 135 = BP	100 = 101	±20% = M	Bolt = B	36 = A	53 = 053		
			CD 136 = PK	1000 = 102	±10% = K	No double sleeve = N	40 = B	65 = 065		
			CD 137 = PX	10000 = 103	+30 / -10% = Q	2 stoppers bracket+double sleeve* = I	51 = C	96 = 096		
			CD 138 = PC		+20 / -0% = R	3 stoppers bracket+double sleeve* = Y	64 = D	100 = 100		
			CD 139 = BL		+50 / -10% = T	No bracket, but double sleeve* = D	77 = E	115 = 115		
				preferred	* Double sleeve for diameter ≥ 51 only		90 = F	236 = 236		
							101 = G			


Technical Specification Screw Type

Dimensions

Standard Housing
Order Code: I, Y, D, N

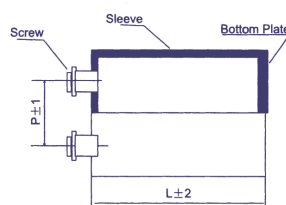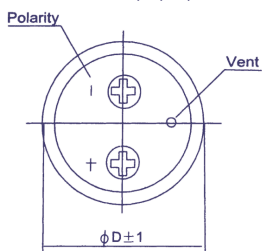

Bolt Housing
Order Code: B

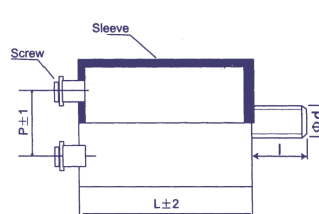

Ø D	Ø d	l
Ø 36	M8	12
≥ Ø 51	M12	16

in mm