

EPA2866





- 1.5KV Isolation •
- Recommended for CS6152/54, DS185/86/87, ATT7288/90 •
- Meet CCITT I.430 requirements with proper termination •
- Robust construction allows for most severe soldering processes •

Electrical Parameters @ 25° C

Primary OCL		Interwinding Capacitance (pF Max.)		Leakage Inductance (μH Max.)		Primary DCR (Ω Max.)		Secondary DCR (Ω Max.)		Hipot (Vrms)
@ 100 KHz, 0.1 Vrms		@ 100 KHz, 0.1 Vrms		@ 100 KHz, 0.1 Vrms				@ 200 Vdc		
T1	T2	T1	T2	T1	T2	T1	T2	T1	T2	
1.2	1.2	32	37	0.55	0.80	0.7	0.7	1.1	0.9	1500

Schematic

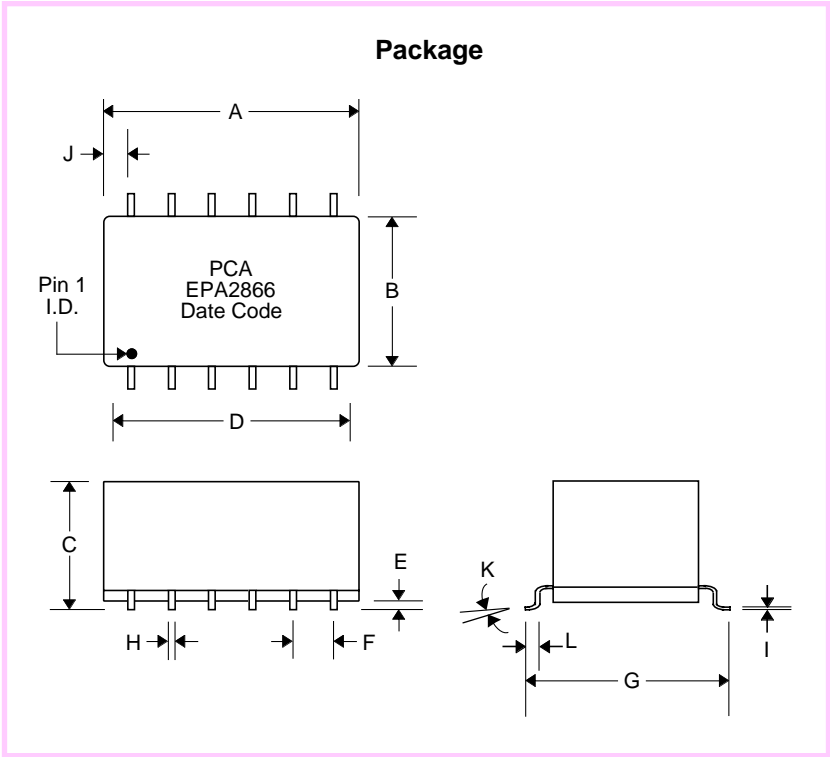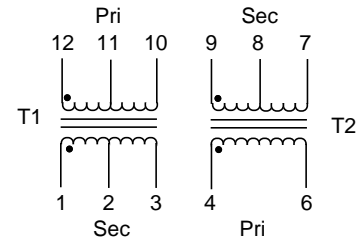

Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	.655	.675	.	16.64	17.15	.
B	.380	.400	.	9.65	10.16	.
C	.320	.340	.	8.13	8.64	.
D	.500	Typ.	.	12.70	Typ.	.
E	.070	Typ.	.	.254	Typ.	.
F	.100	Typ.	.	2.54	Typ.	.
G	.520	.540	.	13.21	13.72	.
H	.018	.022	.	.457	.559	.
I	.010	Typ.	.	2.54	Typ.	.
J	.075	.095	.	1.91	2.41	.
K	0°	8°	.	0°	8°	.
L	.040	.060	.	1.02	1.52	.