
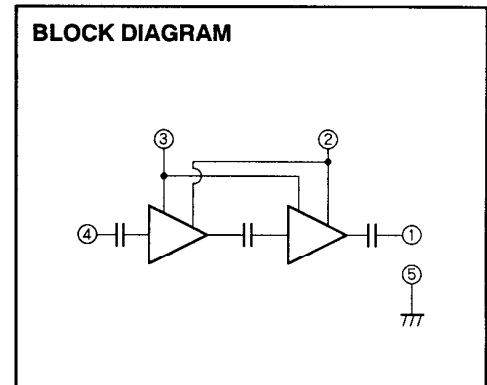


M68739R

154-162MHz, 9.6V, 7W FM PORTABLE RADIO

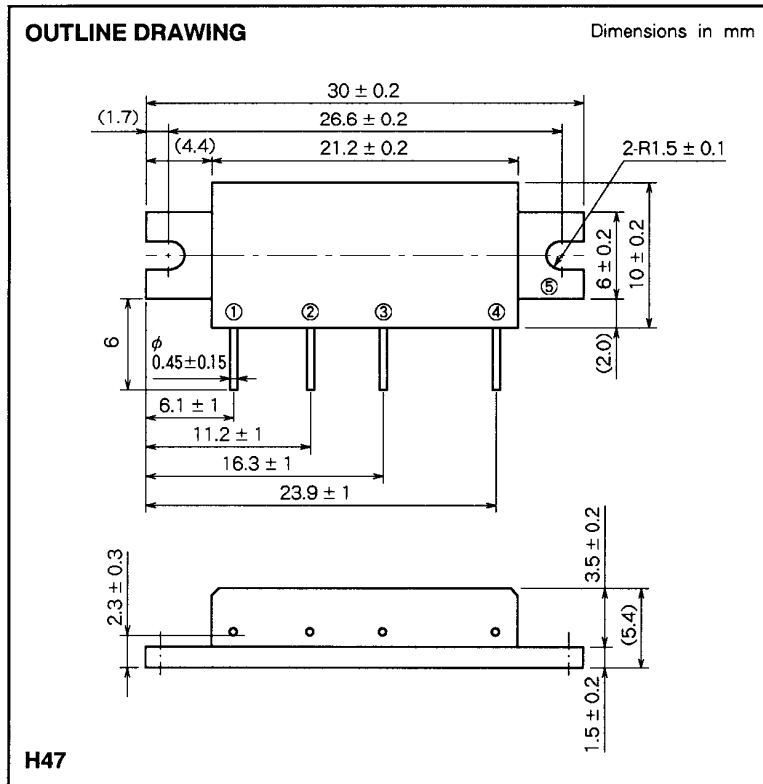

PIN :

- ① Po : RF OUTPUT
- ② VDD : DRAIN BIAS SUPPLY
- ③ VGG : GATE BIAS SUPPLY
- ④ Pin : RF INPUT
- ⑤ GND : FIN

ABSOLUTE MAXIMUM RATINGS ($T_c = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
V _{DD}	Supply voltage	$V_{GG} \leq 3.5\text{V}$, $Z_G = Z_L = 50\Omega$	16	V
V _{GG}	Gate bias voltage		4	V
P _{in}	Input power	$f = 154$ to 162MHz , $Z_G = Z_L = 50\Omega$	30	mW
P _o	Output power	$f = 154$ to 162MHz , $Z_G = Z_L = 50\Omega$	10	W
T _{C(OP)}	Operation case temperature	$f = 154$ to 162MHz , $Z_G = Z_L = 50\Omega$	- 30 to 100	$^\circ\text{C}$
T _{stg}	Storage temperature		- 40 to 110	$^\circ\text{C}$

Note : Above parameters are guaranteed independently.


ELECTRICAL CHARACTERISTICS ($T_c = 25^\circ\text{C}$, $Z_G = Z_L = 50\Omega$, unless otherwise noted)

Symbol	Parameter	Test conditions	Limits		Unit
			Min	Max	
f	Frequency range		154	162	MHz
P _o	Output power		7		W
η_T	Total efficiency	$V_{DD} = 9.6\text{V}$	50		%
2fo	2nd. harmonic	$V_{GG} = 3.5\text{V}$		- 20	dBc
3fo	3rd. harmonic	$P_{in} = 20\text{mW}$		- 30	dBc
ρ_{in}	Input VSWR			3	-
-	Stability	$Z_G = 50\Omega$, $V_{DD} = 4.8$ to 16V , Load VSWR < 4.4 : 1	No parasitic oscillation		-
-	Load VSWR tolerance	$V_{DD} = 13.2\text{V}$, $P_{in} = 20\text{mW}$, $P_o = 7\text{W}$ (V _{GG} Adjust), $Z_L = 20 : 1$	No degradation or destroy		-


Note : Above parameters, ratings, limits and conditions are subject to change.

TYPICAL PERFORMANCE DATA


OUTPUT POWER, TOTAL EFFICIENCY, INPUT VSWR VS. FREQUENCY CHARACTERISTICS

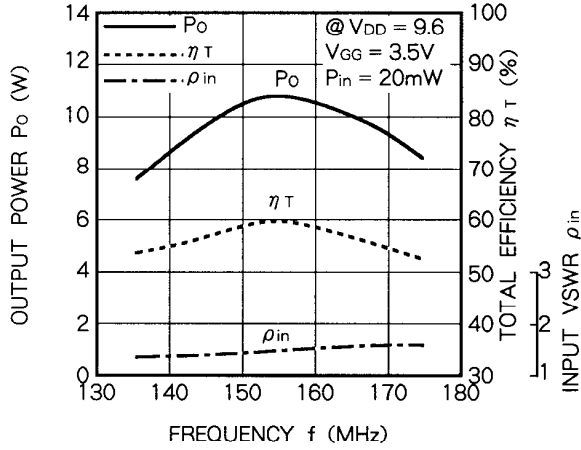

OUTPUT POWER, TOTAL EFFICIENCY VS. GATE VOLTAGE CHARACTERISTICS

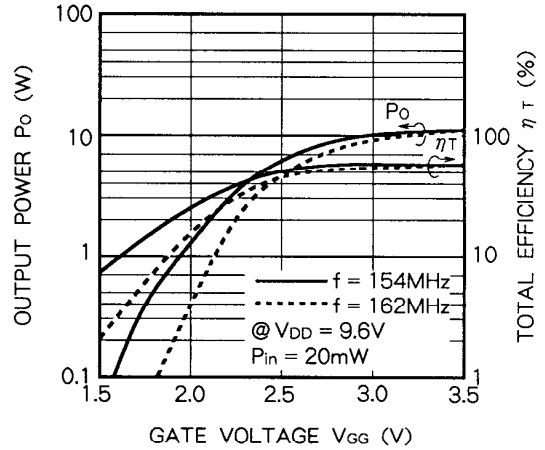

OUTPUT POWER, TOTAL EFFICIENCY VS. SUPPLY VOLTAGE CHARACTERISTICS

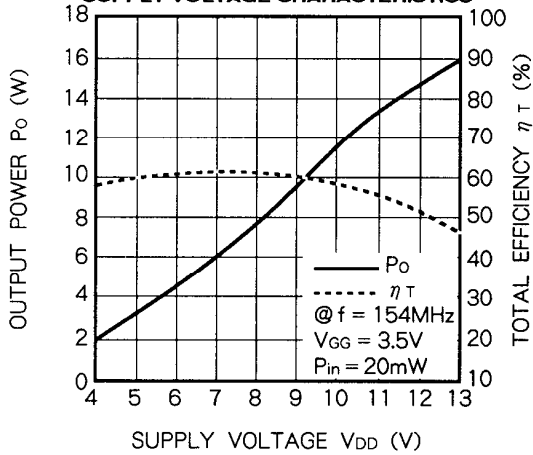

OUTPUT POWER, TOTAL EFFICIENCY VS. SUPPLY VOLTAGE CHARACTERISTICS

