


# NS346 Calibrated Noise Sources NS346E-2 10 MHz to 26500 MHz

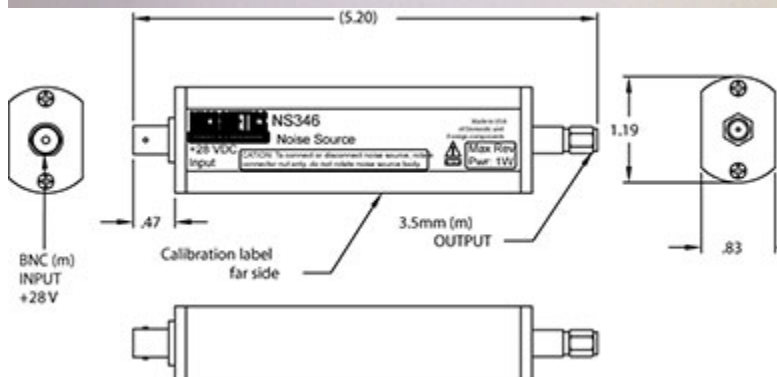

## Specifications

RF Frequency	10 MHz to 26500 MHz
Noise Output	19 to 25 db ENR
Noise Spectral Density ( $N_0$ )	-152 dBm/Hz
VSWR	1.50:1 Max
Peak Factor	5:1
Bias Voltage	28 V
Supply Current	25 mA Max
Impedance	50 ohms

## Package and Connectivity

Construction	Coaxial
Package Type	APC 3.5 mm

## Environmental

Operating Temperature	-55 to 95 °C
Storage Temperature	-65 to 125 °C

## Notes

15 VDC available upon request

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | [www.Micronetics.com](http://www.Micronetics.com)

# MICRONETICS

