

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0525590853

Status:

Active

Overview:

Description:

0.50mm (.020") Pitch FFC/FPC Connector, Vertical, SMT, ZIF, 8 Circuits, Lead-free, Gold (Au) Contact Plating

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

52559Series

Agency Certification

UL

E29179

General

Product Family

FFC/FPC Connectors

Series

52559

Overview

ffc_fpc_smt

Product Name

N/A

Physical

Circuits (Loaded)

8

Contact Position

N/A

Durability (mating cycles max)

20

Entry Angle

Vertical

Flammability

94V-0

Mated Height (in)

0.154 In

Mated Height (mm)

3.90 mm

Material - Metal

Phosphor Bronze

Material - Plating Mating

Gold

Material - Plating Termination

Tin

Material - Resin

Nylon

Number of Rows

1

Orientation

Vertical

PCB Locator

No

PCB Retention

Yes

Packaging Type

Embossed Tape on Reel

Pitch - Mating Interface (in)

0.020 In

Pitch - Mating Interface (mm)

0.50 mm

Polarized to PCB

No

Stackable

No

Temperature Range - Operating

-20°C to +85°C

Termination Interface: Style

Surface Mount

Wire/Cable Type

FFC/FPC

Electrical

Current - Maximum per Contact

0.5A

Voltage - Maximum

50V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Packaging Specification

SPK-52559-001





Product Specification

PS-52559-014, RPS-52559-062, RPS-52559-065, RPS-52559-078

Sales Drawing

SD-52559-048, SD-52559-050

10 9 8 7 6 5 4 3 2 1

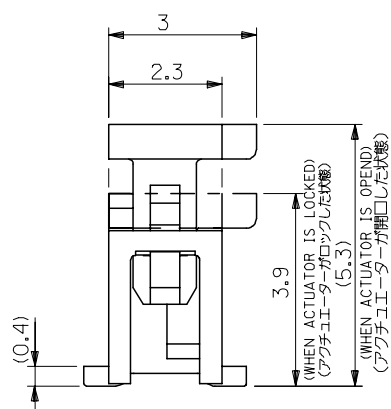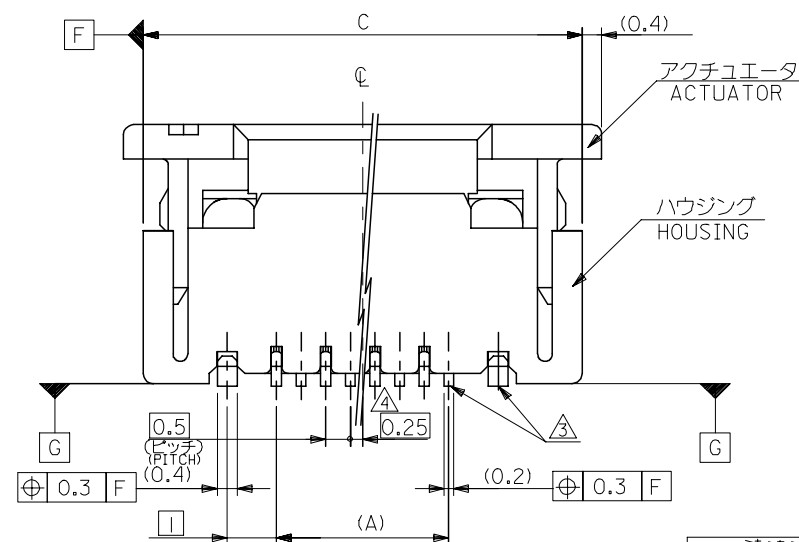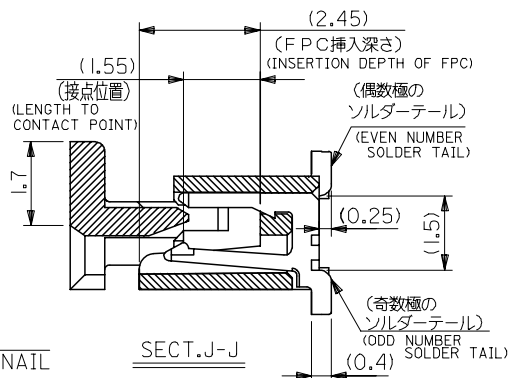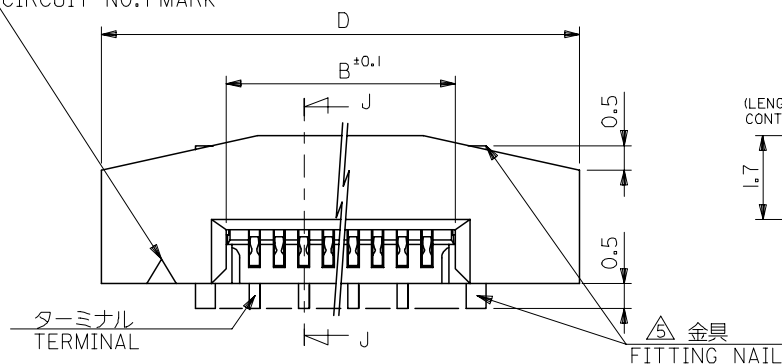回路番号1用マーク
CIRCUIT NO.1 MARK


注記 NOTES

I. 使用材料 : MATERIAL


ハウジング : 46NYLON UL94V-0
HOUSINGアクチュエータ : PPS UL94V-0
ACTUATORターミナル : リン青銅 (t=0.2)
TERMINAL PHOS-BRO: 接点部 金メッキ 0.1マイクロメートル以上
CONTACT GOLD 0.1 MICROMETER MINIMUM: 半田付け部 錫メッキ 1.0マイクロメートル以上
TAIL TIN 1.0 MICROMETER MINIMUM: ニッケル下地 1.0マイクロメートル以上
NICKEL (UNDER PLATING) 1.0 MICROMETER MINIMUM金具 : リン青銅 (t=0.4)
FITTING NAIL PHOS-BRO: 錫メッキ 1.0マイクロメートル以上
TIN 1.0 MICROMETER MINIMUM: ニッケル下地 1.0マイクロメートル以上
NICKEL (UNDER PLATING) 1.0 MICROMETER MINIMUM2. エンボステープ梱包時は、アクチュエータがロックした状態とする。
IN THE PACKAGE, ACTUATOR OF PART NO. 52559-**79 SHOULD BE LOCKED.△3 ソルダータール半田付け面のズレ量、及び金具半田付け面のズレ量は、基準面 [G] に対し上方向 0.05 MAX.、下方向 0.15 MAX. とする。
MISALIGNMENT OF SOLDER TAILS AND FITTING NAILS FROM [G] UPPER DIRECTION: 0.05 MAX., LOWER DIRECTION: 0.15 MAX.△4 偶数極に適用。
APPLY FOR EVEN CIRCUIT.△5 パターンはくり止め用金具。
FITTING NAIL FOR PREVENTION OF PEELING OF P.C.B. PATTERN.△6 R.O. 3は、FPCの導体部にかからないこと。
R.O.3 MUST NOT BE OVERLAPPED TO PATTERN OF FPC.

MODEL NO. 52559-**79

RELEASED EC NO: J2005-0174 DRWN: MNABE CHKD: KTOJO APPR: NUKITA REV 0	DESCRIPTION 2004/07/14 2004/07/14 2004/07/14	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY MNABE	DATE '04/07/13	TITLE 0.5 FPC CONN ASSY ZIF.				
		10 OVER 30 UNDER	±0.25	CHECKED BY KTOJO	DATE '04/07/13					
		30 OVER	±0.3	APPROVED BY NUKITA	DATE '04/07/13	-LEAD FREE-  MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO. SEE CHART					DOCUMENT NO. SD-52559-048	
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

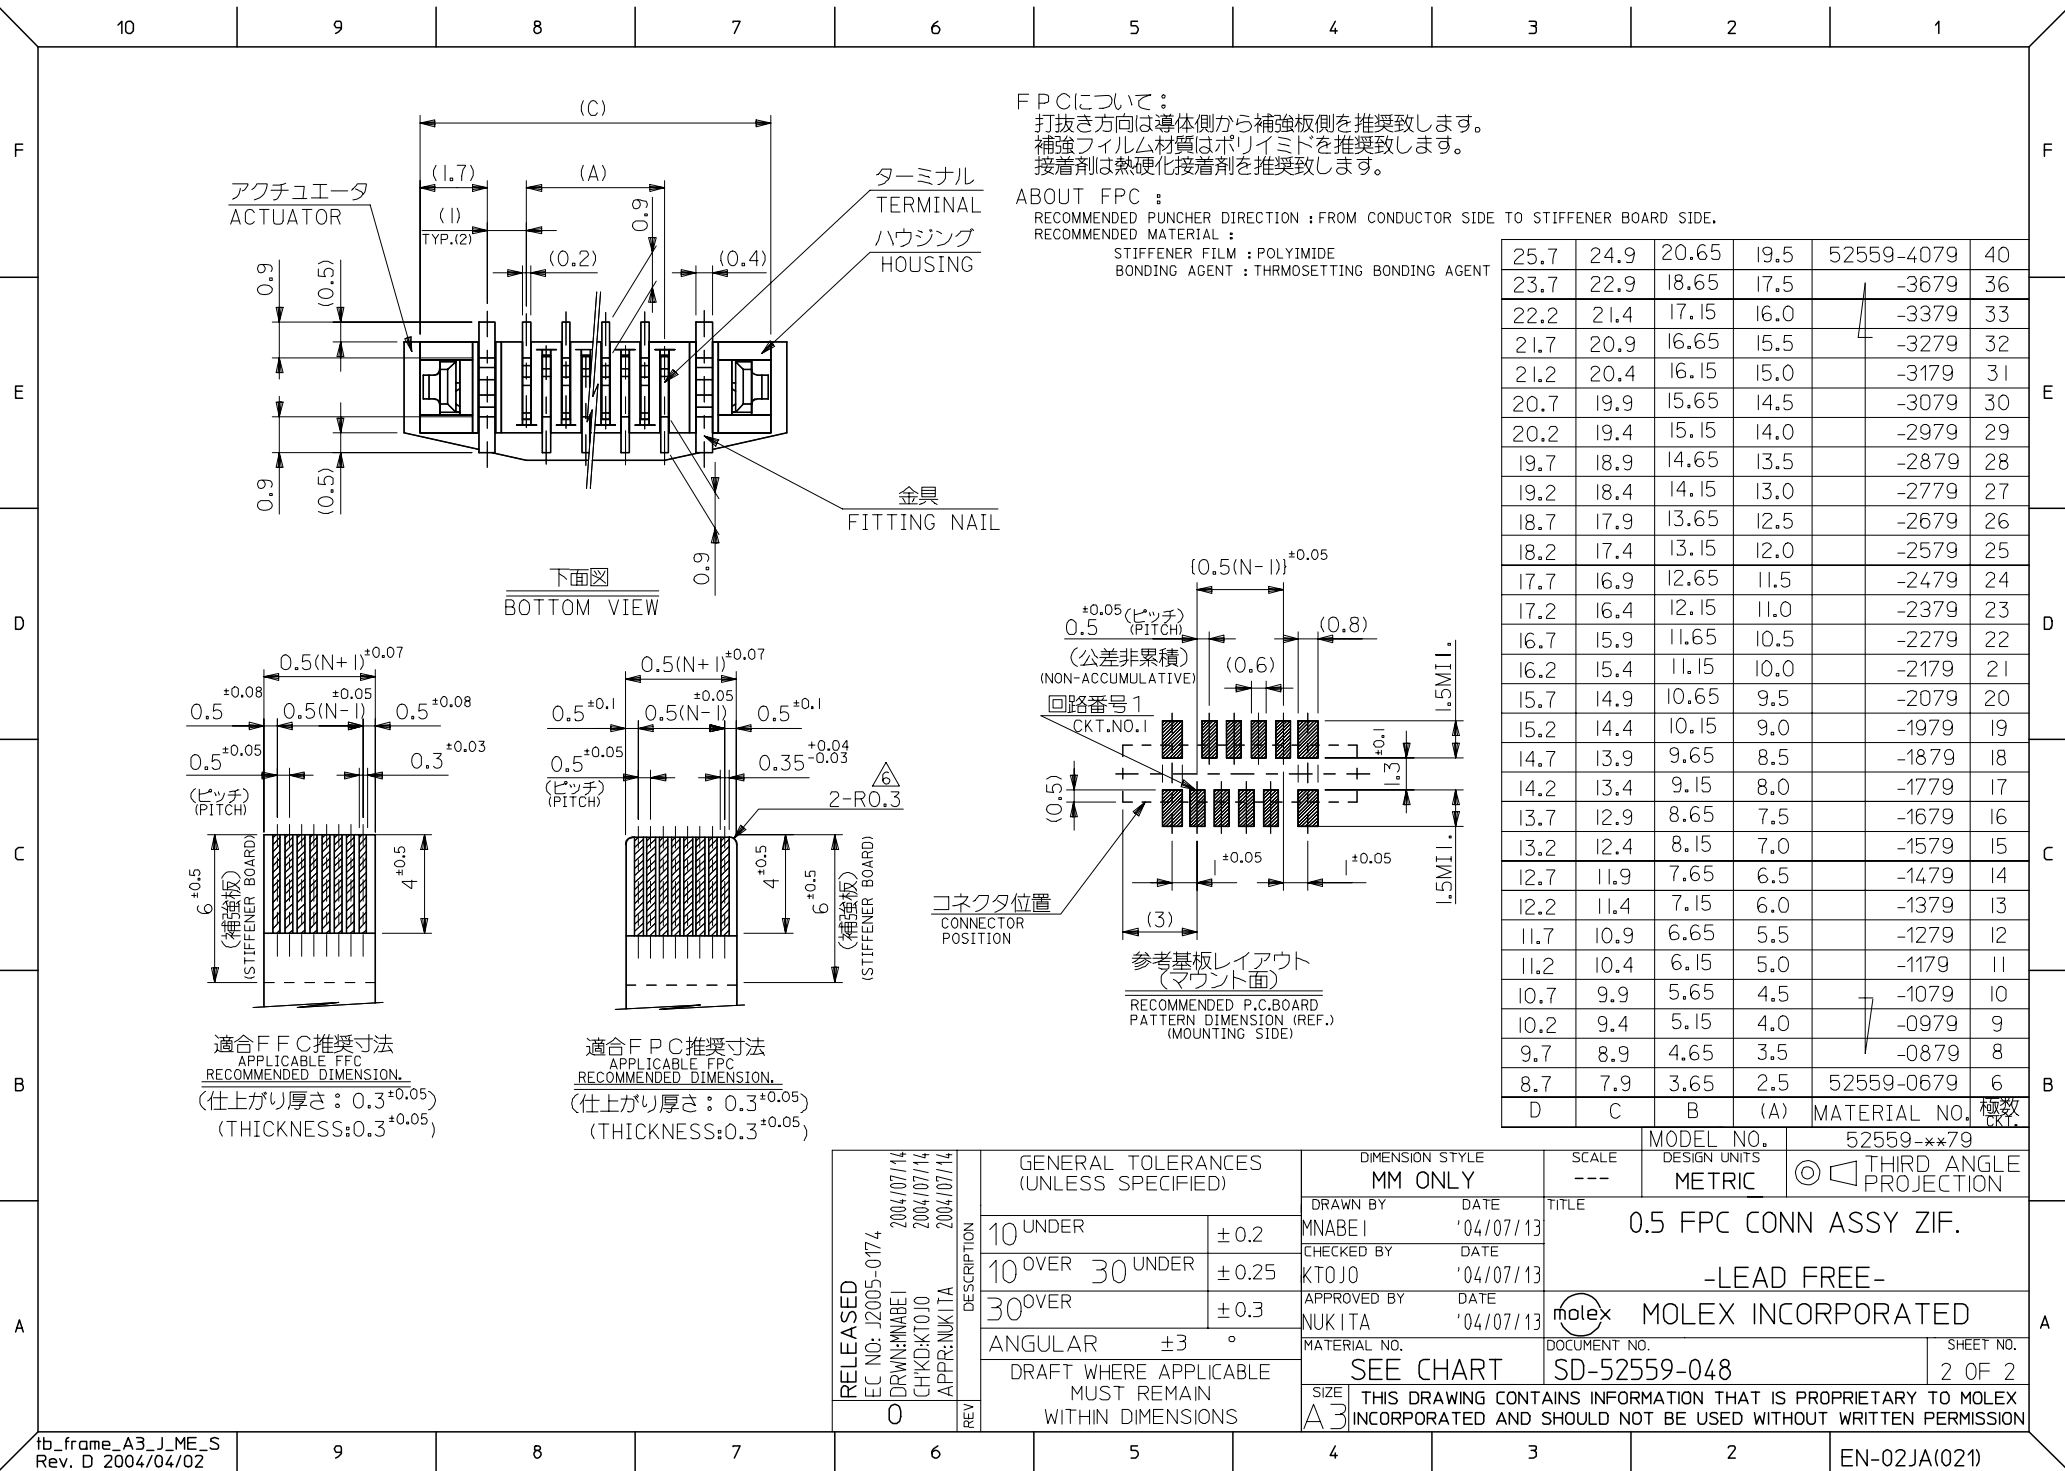


EN-02JA(021)

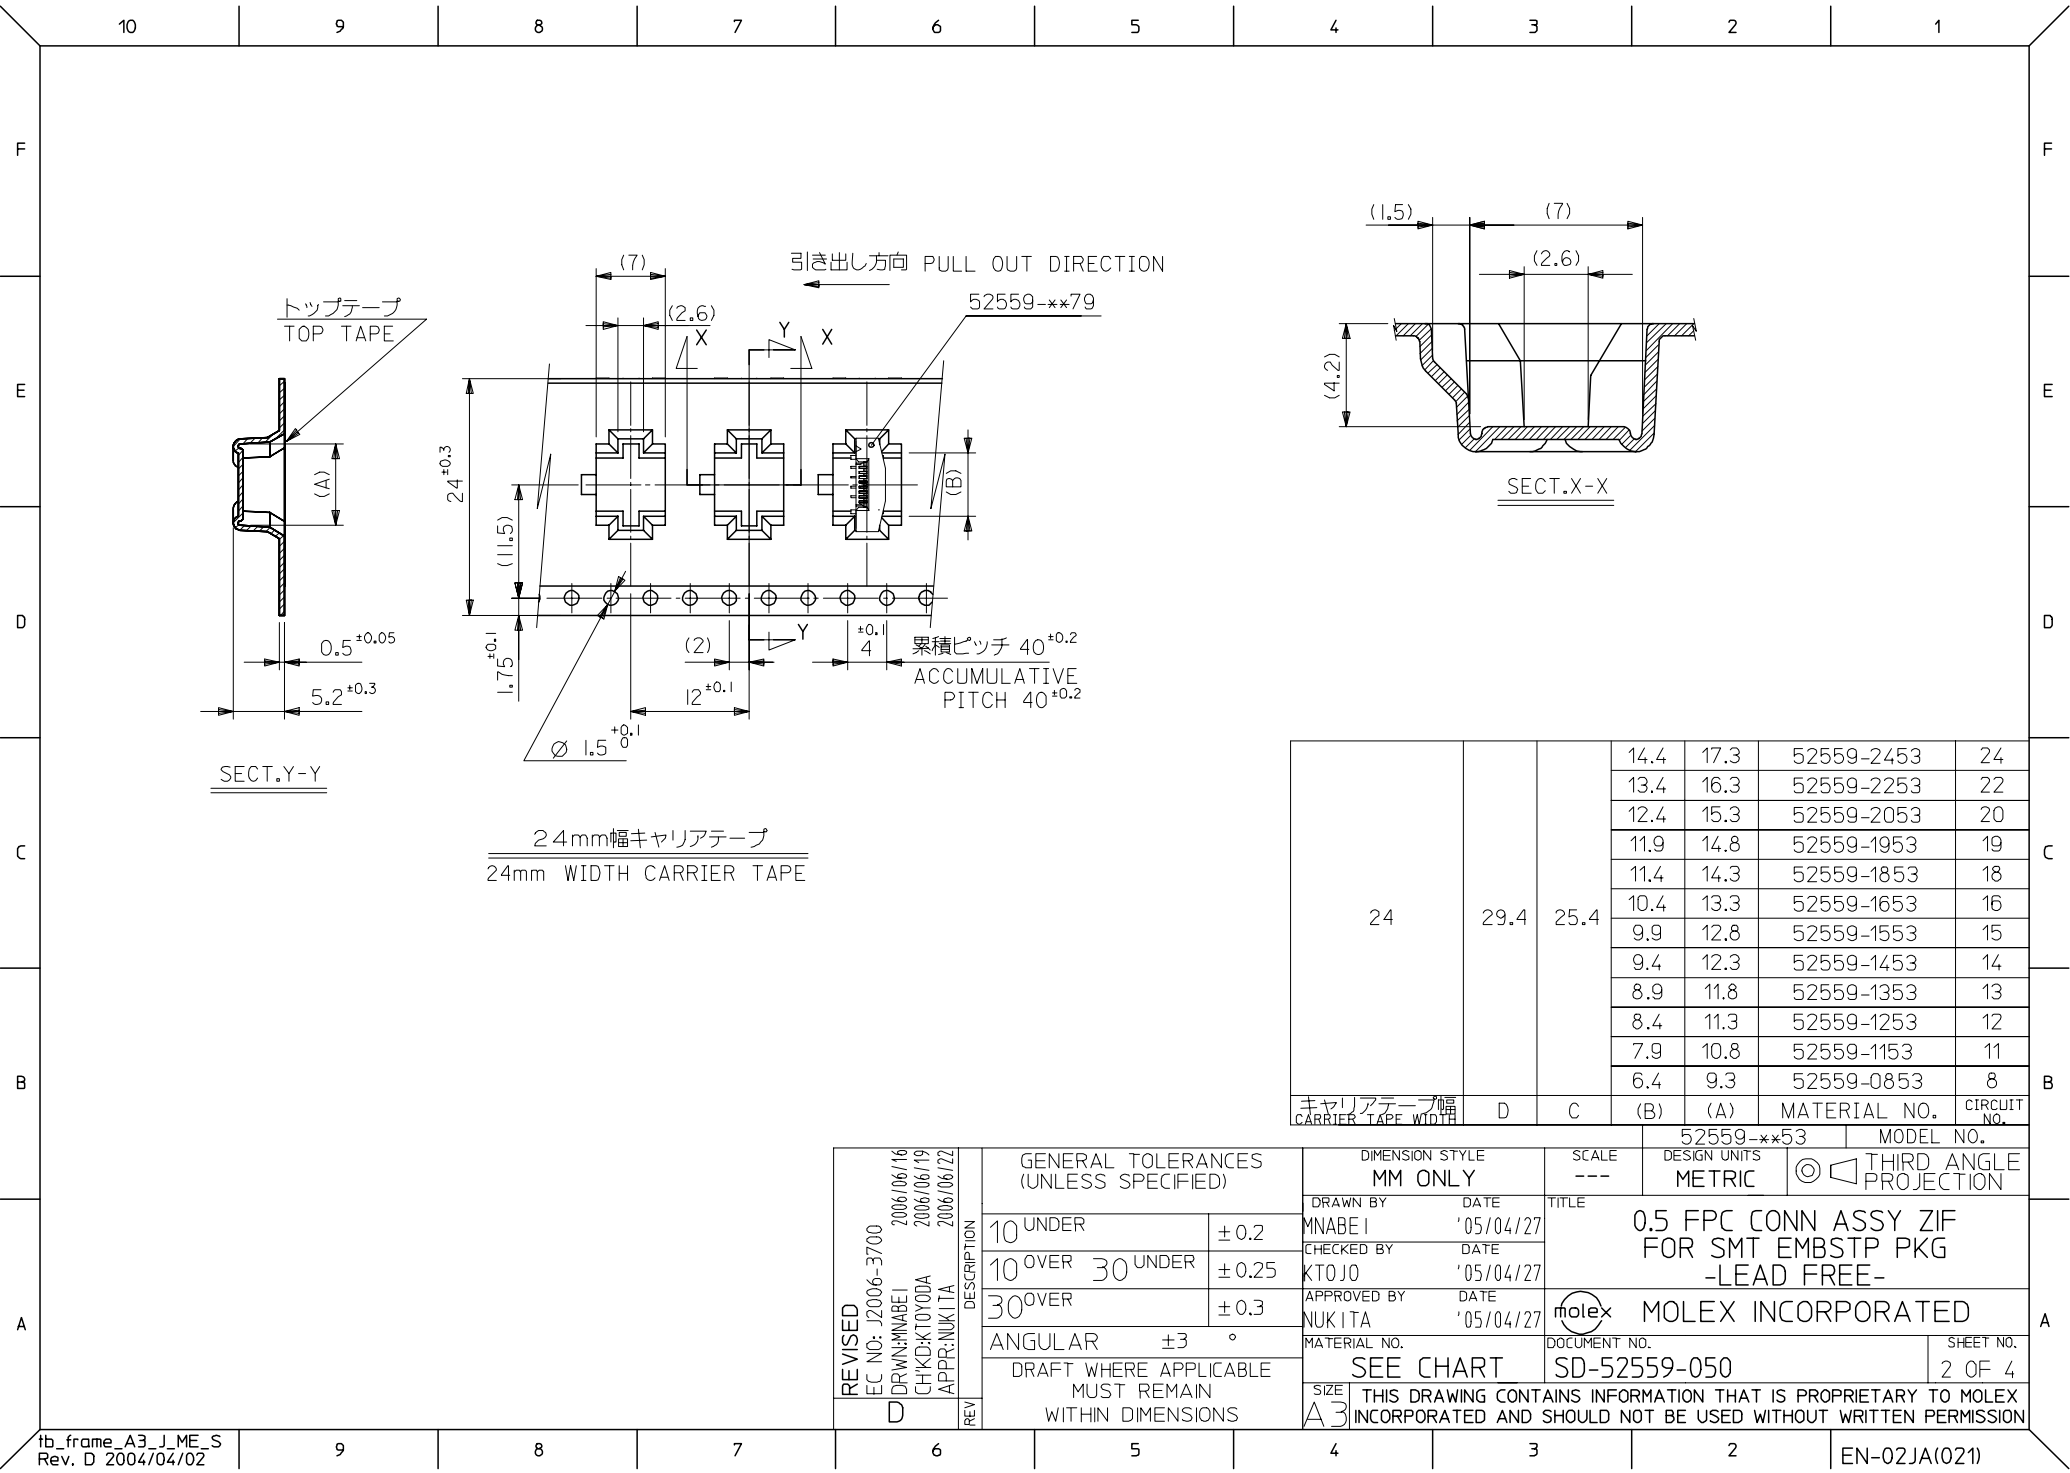


24	29.4	25.4	14.4	17.3	52559-2453	24
			13.4	16.3	52559-2253	22
			12.4	15.3	52559-2053	20
			11.9	14.8	52559-1953	19
			11.4	14.3	52559-1853	18
			10.4	13.3	52559-1653	16
			9.9	12.8	52559-1553	15
			9.4	12.3	52559-1453	14
			8.9	11.8	52559-1353	13
24	29.4	25.4	8.4	11.3	52559-1253	12
			7.9	10.8	52559-1153	11
			6.4	9.3	52559-0853	8
キャリアテープ幅 CARRIER TAPE WIDTH	D	C	(B)	(A)	MATERIAL NO.	CIRCUIT NO.

REVISED EC NO: J2006-3700 DRWN: MNABE I CHKD: KTOYODA APPR: NUKITA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY MNABE I	DATE '05/04/27	TITLE 0.5 FPC CONN ASSY ZIF FOR SMT EMBSTP PKG -LEAD FREE-			
		10 OVER 30 UNDER	± 0.25	CHECKED BY KTOJO	DATE '05/04/27				
		30 OVER	± 0.3	APPROVED BY NUKITA	DATE '05/04/27	MOLEX INCORPORATED			
		ANGULAR	± 3 °	MATERIAL NO.					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-52559-050		2 OF 4	
D	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

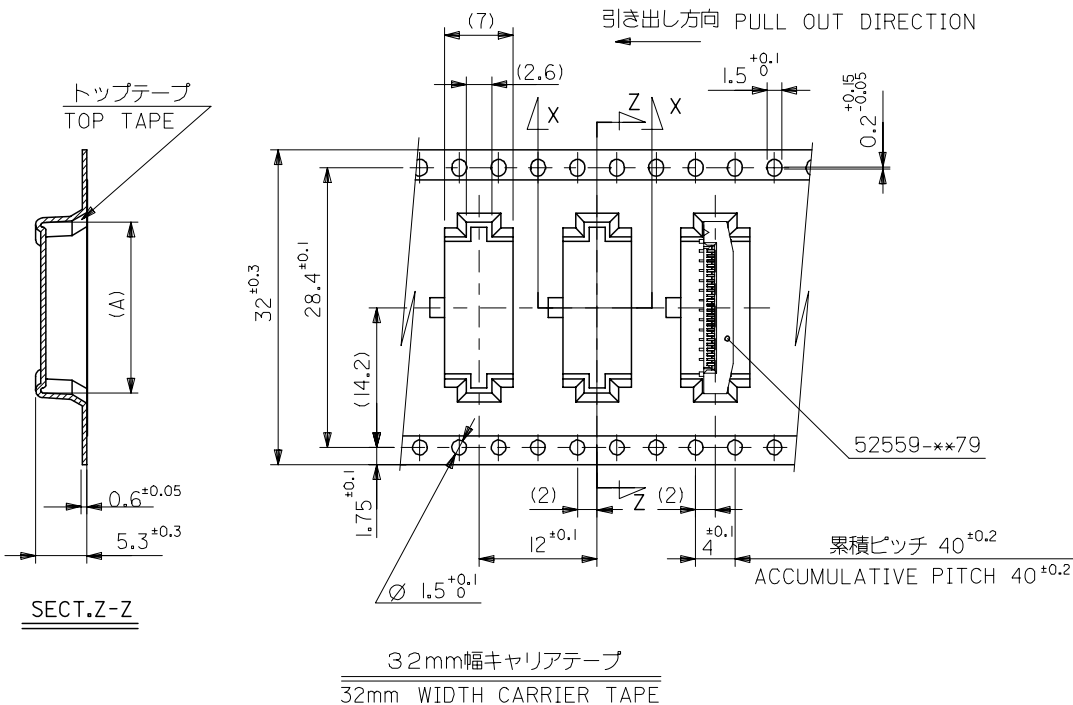

32	37.4	33.4	18.9	21.8	52559-3353	33
			18.4	21.3	52559-3253	32
			17.4	20.3	52559-3053	30
			16.4	19.3	52559-2853	28
			14.9	17.8	52559-2553	25
キャリアテープ幅 CARRIER TAPE WIDTH	D	C	(B)	(A)	MATERIAL NO.	CIRCUIT NO.

REVISED EC NO: J2006-3700 DRWN: MNABE I CHKD: KTOYODA APPR: NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY MNABE I	DATE '05/04/27	TITLE 0.5 FPC CONN ASSY ZIF FOR SMT EMBSTP PKG -LEAD FREE-				
		10 OVER 30 UNDER	± 0.25	CHECKED BY KTOYODA	DATE '05/04/27					
		30 OVER	± 0.3	APPROVED BY NUKITA	DATE '05/04/27	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-52559-050		3 OF 4		
	REV D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

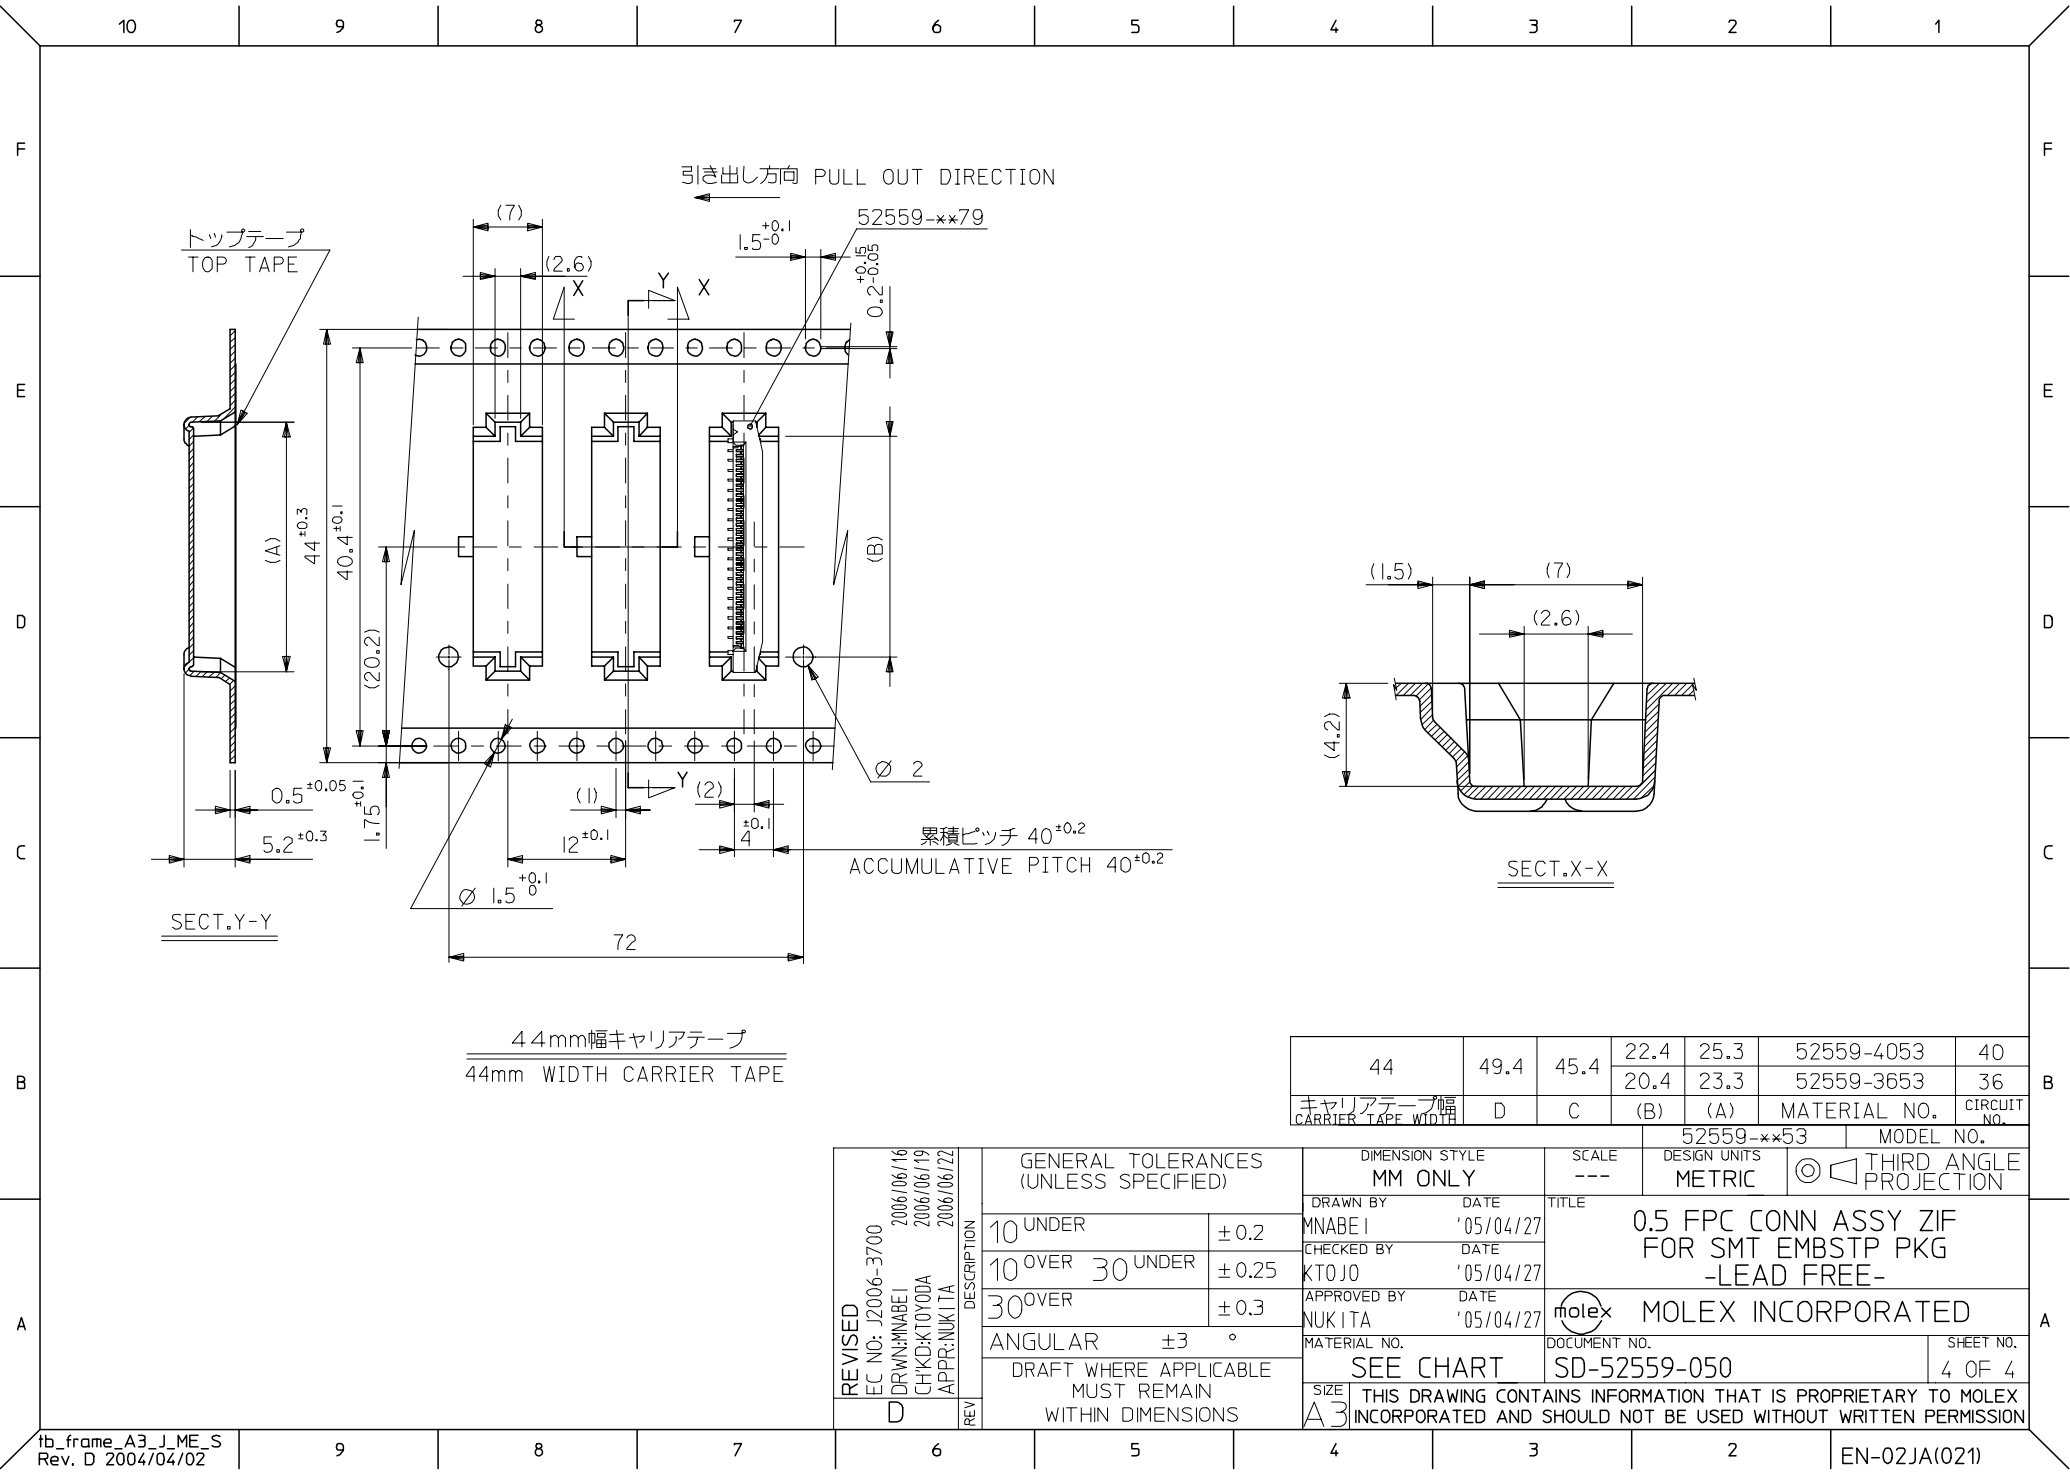

44mm幅キャリアテープ
44mm WIDTH CARRIER TAPE

SECT.X-X

44	49.4	45.4	22.4	25.3	52559-4053	40
キャリアテープ幅 CARRIER TAPE WIDTH	D	C	(B)	(A)	52559-3653	36
			52559-xx53		MATERIAL NO.	CIRCUIT NO.

REVISED EC NO: J2006-3700 D DRWN: MNABE I CHKD: KTOYODA APPR: NUKITA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY MNABE I	DATE '05/04/27	TITLE 0.5 FPC CONN ASSY ZIF FOR SMT EMBSTP PKG -LEAD FREE-				
		10 OVER 30 UNDER	± 0.25	CHECKED BY KTOYODA	DATE '05/04/27					
		30 OVER	± 0.3	APPROVED BY NUKITA	DATE '05/04/27	MOLEX MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.			DOCUMENT NO.			SHEET NO.
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART			SD-52559-050			4 OF 4
		REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							