



P-Channel Enhancement Mode Field Effect Transistor

FEATURES

- -20V, -7.6A, $R_{DS(ON)} = 22m\Omega$ @ $V_{GS} = -4.5V$.
 $R_{DS(ON)} = 32m\Omega$ @ $V_{GS} = -2.5V$.
- Super high dense cell design for extremely low $R_{DS(ON)}$.
- High power and current handing capability.
- Lead free product is acquired.
- Surface mount Package.



ABSOLUTE MAXIMUM RATINGS $T_A = 25^\circ C$ unless otherwise noted

Parameter	Symbol	Limit	Units
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 12	V
Drain Current-Continuous	I_D	-7.6	A
Drain Current-Pulsed ^a	I_{DM}	-30	A
Maximum Power Dissipation	P_D	2.0	W
Operating and Store Temperature Range	T_J, T_{Stg}	-55 to 150	$^\circ C$

Thermal Characteristics

Parameter	Symbol	Limit	Units
Thermal Resistance, Junction-to-Ambient ^b	$R_{\theta JA}$	62.5	$^\circ C/W$









CEM2187

P-Channel Electrical Characteristics $T_A = 25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{\text{GS}} = 0\text{V}, I_D = -250\mu\text{A}$	-20			V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{\text{DS}} = -20\text{V}, V_{\text{GS}} = 0\text{V}$			-1	μA
Gate Body Leakage Current, Forward	I_{GSSF}	$V_{\text{GS}} = 12\text{V}, V_{\text{DS}} = 0\text{V}$			100	nA
Gate Body Leakage Current, Reverse	I_{GSSR}	$V_{\text{GS}} = -12\text{V}, V_{\text{DS}} = 0\text{V}$			-100	nA
On Characteristics^c						
Gate Threshold Voltage	$V_{\text{GS}(\text{th})}$	$V_{\text{GS}} = V_{\text{DS}}, I_D = -250\mu\text{A}$	-0.4		-1.3	V
Static Drain-Source On-Resistance	$R_{\text{DS}(\text{on})}$	$V_{\text{GS}} = -4.5\text{V}, I_D = -7.6\text{A}$		17	22	$\text{m}\Omega$
		$V_{\text{GS}} = -2.5\text{V}, I_D = -6\text{A}$		24	32	$\text{m}\Omega$
Dynamic Characteristics^d						
Forward Transconductance	g_{FS}	$V_{\text{DS}} = -9\text{V}, I_D = -7.6\text{A}$		32		S
Input Capacitance	C_{iss}	$V_{\text{DS}} = -10\text{V}, V_{\text{GS}} = 0\text{V}, f = 1.0 \text{ MHz}$		2805		pF
Output Capacitance	C_{oss}			505		pF
Reverse Transfer Capacitance	C_{rss}			395		pF
Switching Characteristics^d						
Turn-On Delay Time	$t_{\text{d}(\text{on})}$	$V_{\text{DD}} = -6\text{V}, I_D = -1\text{A}, V_{\text{GS}} = -4.5\text{V}, R_{\text{GEN}} = 6\Omega$		20	40	ns
Turn-On Rise Time	t_r			18	36	ns
Turn-Off Delay Time	$t_{\text{d}(\text{off})}$			89	178	ns
Turn-Off Fall Time	t_f			49	98	ns
Total Gate Charge	Q_g	$V_{\text{DS}} = -6\text{V}, I_D = -7.6\text{A}, V_{\text{GS}} = -4.5\text{V}$		31.5	41	nC
Gate-Source Charge	Q_{gs}			3.8		nC
Gate-Drain Charge	Q_{gd}			8.8		nC
Drain-Source Diode Characteristics and Maximum Ratings						
Drain-Source Diode Forward Current ^b	I_S				-7.6	A
Drain-Source Diode Forward Voltage ^c	V_{SD}	$V_{\text{GS}} = 0\text{V}, I_S = -2.5\text{A}$			-1.2	V

Notes :

- a.Repetitive Rating : Pulse width limited by maximum junction temperature.□
- b.Surface Mounted on FR4 Board, t ≤ 10 sec.□
- c.Pulse Test : Pulse Width ≤ 300μs, Duty Cycle ≤ 2%.□
- d.Guaranteed by design, not subject to production testing.□

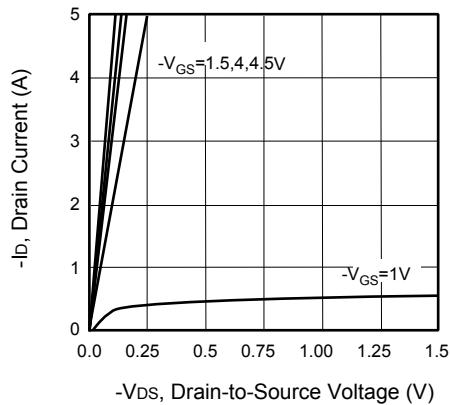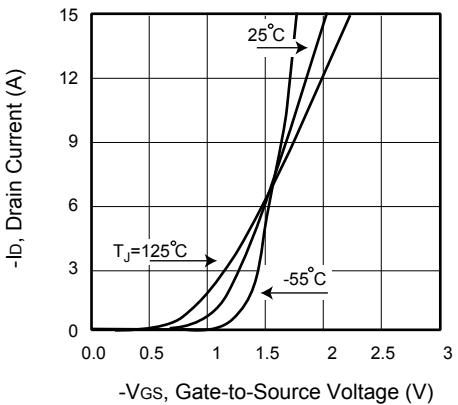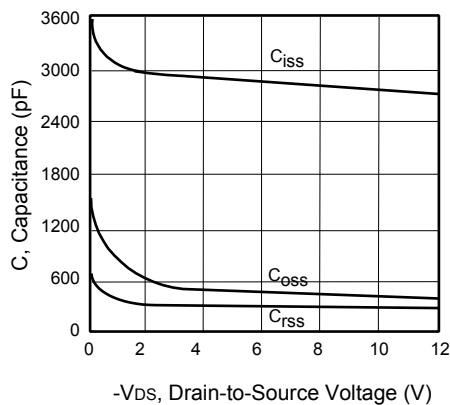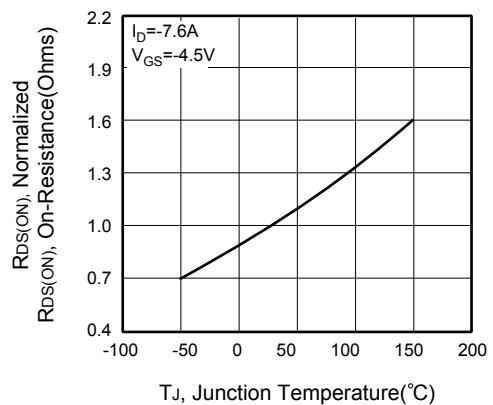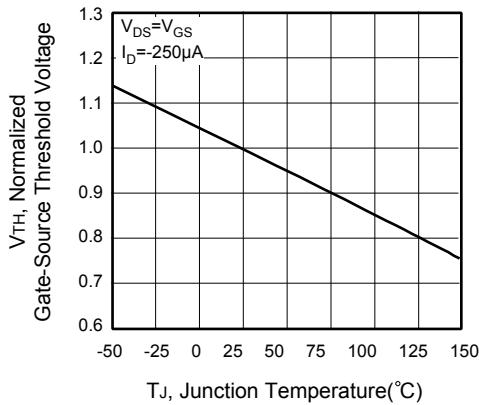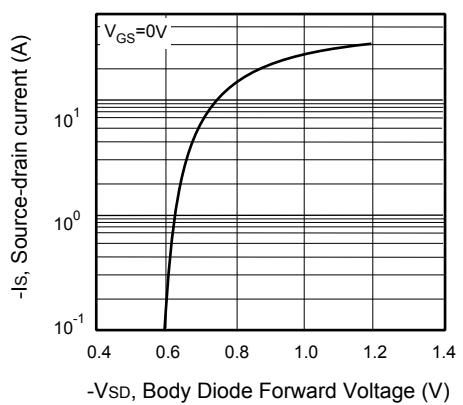**Figure 1. Output Characteristics****Figure 2. Transfer Characteristics****Figure 3. Capacitance****Figure 4. On-Resistance Variation with Temperature****Figure 5. Gate Threshold Variation with Temperature****Figure 6. Body Diode Forward Voltage Variation with Source Current**

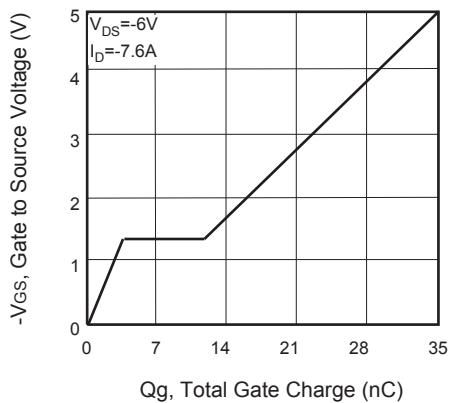


Figure 7. Gate Charge

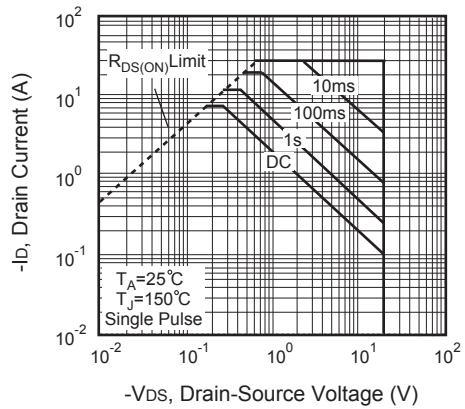


Figure 8. Maximum Safe Operating Area

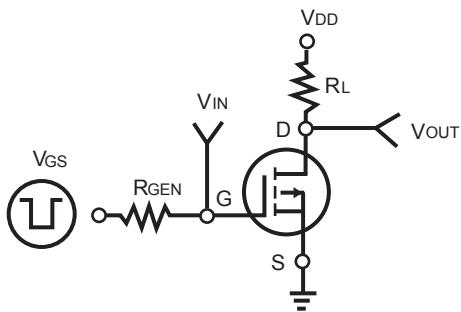


Figure 9. Switching Test Circuit

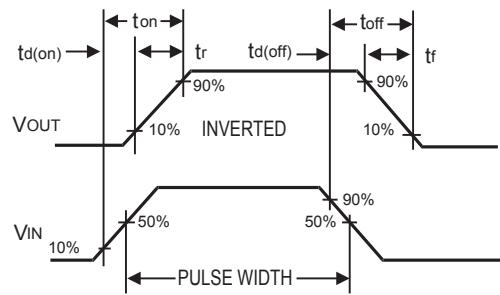


Figure 10. Switching Waveforms

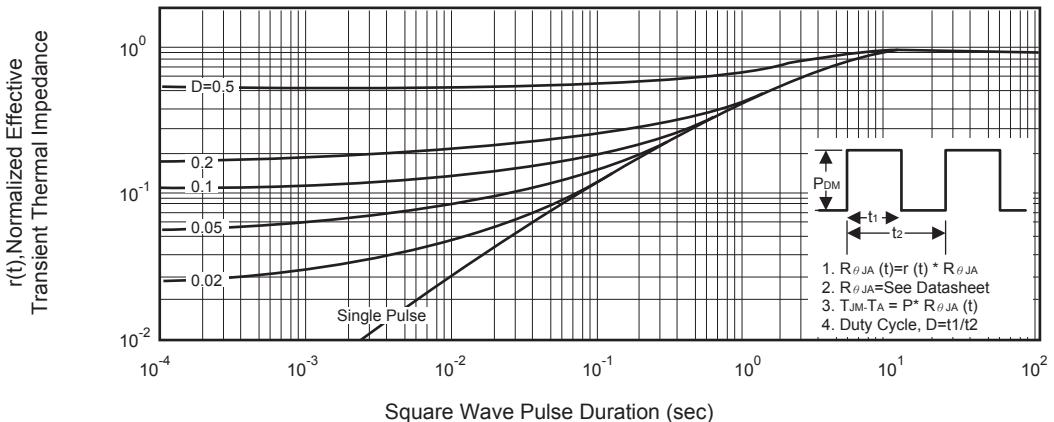


Figure 11. Normalized Thermal Transient Impedance Curve