

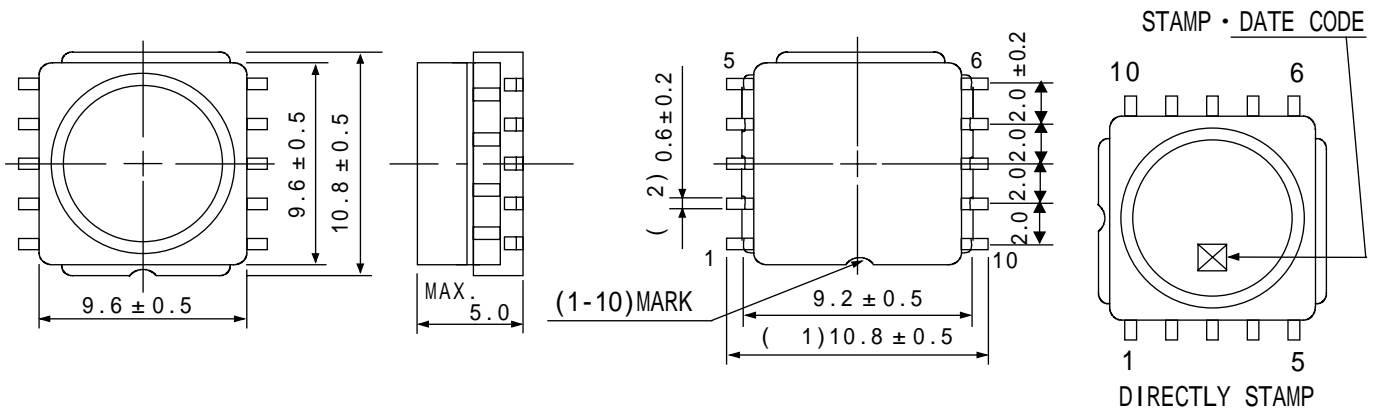

Type: CLS -10

**Product Description**

- 11.3 × 10.1mm Max.(L × W), 5.0mm Max. Height.
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements.


**Feature**

- Magnetically shielded construction.
- Max. Operating frequency 500kHz.  
Max Operating Power 2.2W (500kHz), 1.5W(300kHz), 650mW(100kHz).
- Ideally used in Multiple Output, Portable equipments, also used as power choke.
- RoHS Compliance

**Dimensions (mm)**

**Schematics (Bottom)**


" S " is winding start.

**Land Pattern (mm)**

Sample No.	Inductance (1-5) 1kHz/1V	D.C.R. (1-5)	Hi-pot (1,2,3,4,5-6,7,8,9,10) (50/60Hz)
6311-T107	$34.5\mu\text{H} \pm 30\%$	306m Max.	AC 1000Vrms/1 Min.