



T-41-53

T-41-61

Opto Electronic Chips & Devices

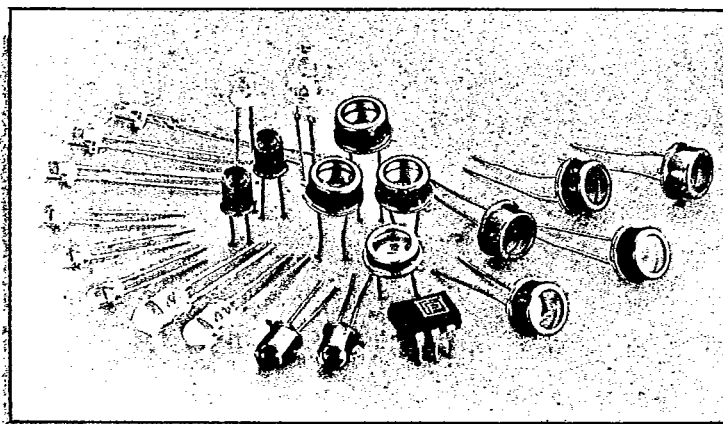

Description		Part Number	Remarks
GaAsP/GaAs	STD Red (655 nm)	FPD-D10K -D10H -D10L	Die Size: 10 mil x 10 mil 12 mil x 12 mil 11 mil x 11 mil
GaAsP/GaAs	STD Red (655 nm)	FPD-D42L/R Custom devices	Monolithic numeric display Custom-designed bar or special figures
GaP/GaP	High Red (700 nm) Yellow Green (570 nm) Standard Green (564 nm) Pure Green (555 nm)	FPD-311RD -212YG -212SG -212PG	11 mil x 11 mil 11 mil x 11 mil 11 mil x 11 mil 11 mil x 11 mil
GaAsP/GaP	High Orange (630 nm) High Yellow (587 nm)	FPD-112HO -112HY	12 mil x 12 mil 12 mil x 12 mil
GaAs/GaAs	Infrared (940 nm)	FPD-212 -215 -313 -413	P/N P/N N/P P/N
GaAlAs/GaAs	Super Red (660 nm) Super Infrared (880 nm)	FPD-SR2 FPD-SI2	Super Red High power output
PIN diode	DETECTOR	FPD-1120 -2120 -2080	Switch speed 220ns Switch speed 50ns & high IL Switch speed 10ns
Phototransistor	DETECTOR	FPT-0125 FPT-0136	Classified according to hFE or IL