

Reflecting small LEDs, directly mountable ($\phi 3.1\text{mm}$) (no need for solder modification)


SLR-343 Series

The SLR-343 series are small 3.1mm LEDs which can be directly mounted on a printed circuit board. Four colors and two lens types are available for a total of eight types, and they are suitable for use in a wide variety of applications.

●Features

- 1) Four colors : red, orange, yellow and green.
- 2) Two lens types : Colored diffused and Colored clear.
- 3) High reliability even in case of direct mount.
- 4) Blow-holeless solder type.

●External dimensions (Units : mm)

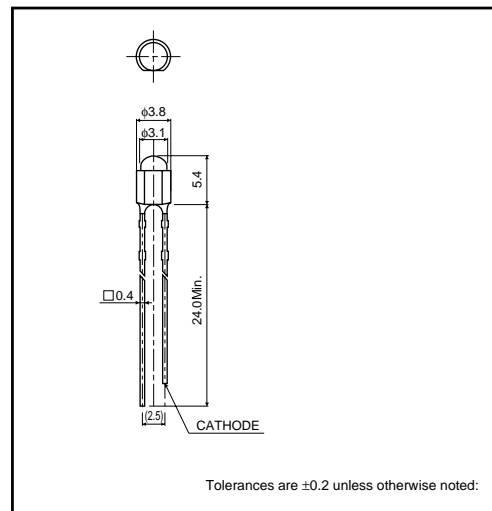

●Selection guide

Emitting color Lens	Red	Orange	Yellow	Green
	Colored diffused	SLR-343VR	SLR-343DU	SLR-343YY
Colored clear	SLR-343VC	SLR-343DC	SLR-343YC	SLR-343MC

●Absolute maximum ratings (Ta = 25°C)

Parameter	Symbol	Red	Orange	Yellow	Green	Unit
		SLR-343VR SLR-343VC	SLR-343DU SLR-343DC	SLR-343YY SLR-343YC	SLR-343MG SLR-343MC	
Power dissipation	P _D	60	60	60	75	mW
Forward current	I _F	20	20	20	25	mA
Peak forward current	I _{FP}	60*	60*	60*	60*	mA
Reverse voltage	V _R	3	3	3	3	V
Operating temperature	T _{opr}	-25~+85				°C
Storage temperature	T _{stg}	-30~+100				°C
Soldering temperature	—	260°C 5 seconds maximum				—

*Pulse width 1ms Duty 1 / 5

LED lamps

●Electrical and optical characteristics (Ta = 25°C)

Parameter	Symbol	Conditions	Red			Orange			Yellow			Green			Unit
			Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	
Forward voltage	V _F	I _F =10mA	-	2.0	3.0	-	2.0	3.0	-	2.1	3.0	-	2.1	3.0	V
Reverse current	I _R	V _R =3V	-	-	10	-	-	10	-	-	10	-	-	10	μA
Peak wavelength	λ _P	I _F =10mA	-	650	-	-	610	-	-	585	-	-	563	-	nm
Spectral line half width	Δλ	I _F =10mA	-	40	-	-	40	-	-	40	-	-	40	-	nm
Viewing angle	2θ _{1/2}	Diffused	-	40	-	-	40	-	-	40	-	-	40	-	deg
		Transparent	-	40	-	-	40	-	-	40	-	-	40	-	

●Luminous intensity vs. wavelength

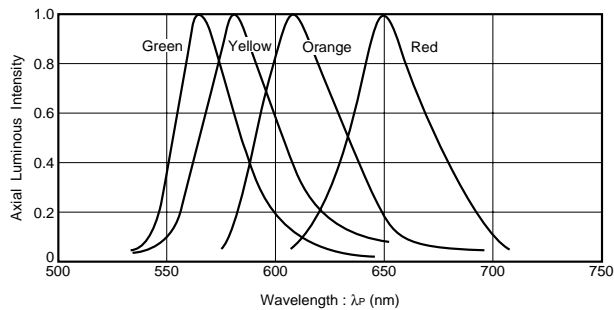


Fig. 1

●Luminous intensity

Color	λ _P	Type	Min.	Typ.	Max.	Unit
Red	650	SLR-343VR	5.6	16.0	-	mcd
		SLR-343VC	9.0	25.0	-	mcd
Orange	610	SLR-343DU	5.6	16.0	-	mcd
		SLR-343DC	9.0	25.0	-	mcd
Yellow	585	SLR-343YY	3.6	10	-	mcd
		SLR-343YC	5.6	16.0	-	mcd
Green	563	SLR-343MG	5.6	16.0	-	mcd
		SLR-343MC	9.0	25.0	-	mcd

Note: Measured at I_F=10mA

●Directional pattern

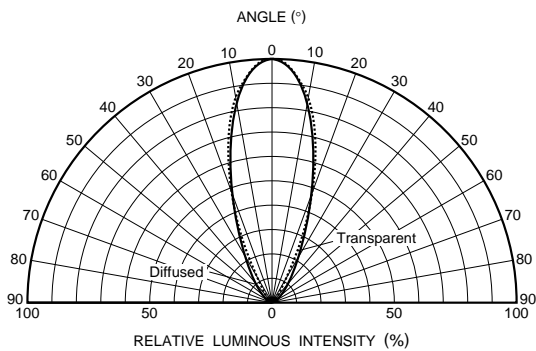


Fig. 2

LED lamps

●Electrical characteristic curves 1 (red)

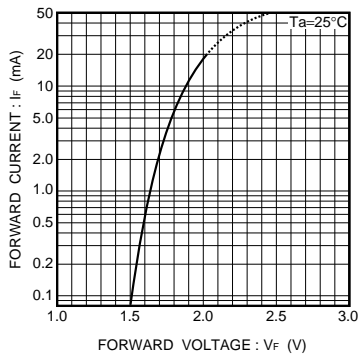


Fig.3 Forward current vs. forward voltage

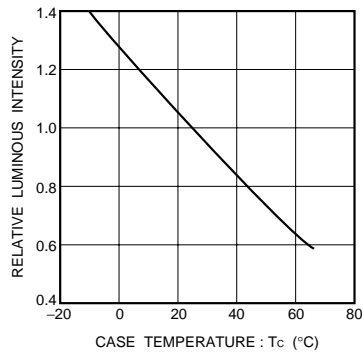


Fig.4 Luminous intensity vs. case temperature

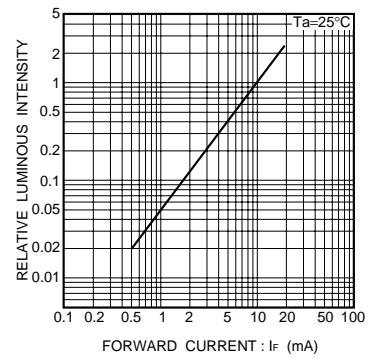


Fig.5 Luminous intensity vs. forward current

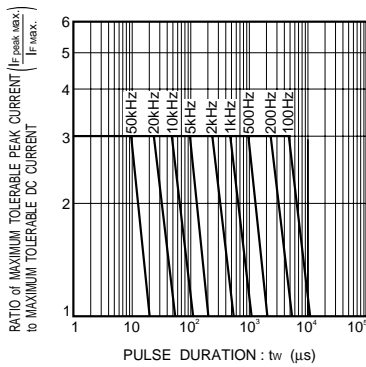


Fig.6 Maximum tolerable peak current vs. pulse duration

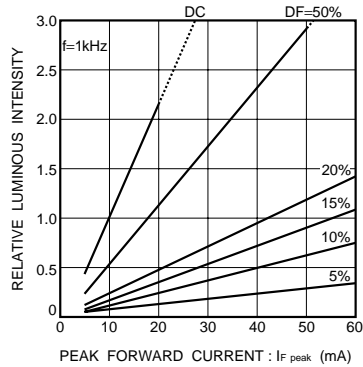


Fig.7 Luminous intensity vs. peak forward current

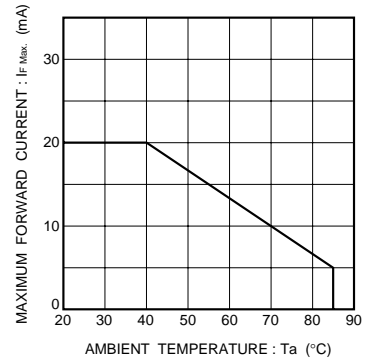


Fig.8 Maximum forward current vs. ambient temperature

LED lamps

●Electrical characteristic curves 2 (orange)

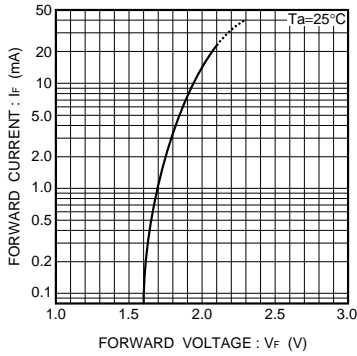


Fig.9 Forward current vs. forward voltage

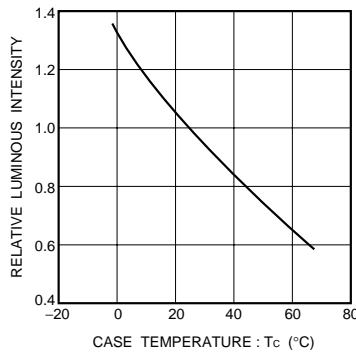


Fig.10 Luminous intensity vs. case temperature

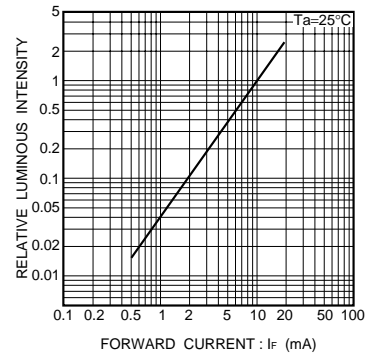


Fig.11 Luminous intensity vs. forward current

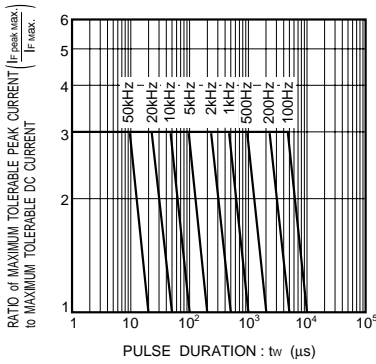


Fig.12 Maximum tolerable peak current vs. pulse duration

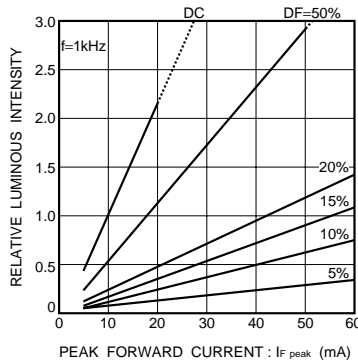


Fig.13 Luminous intensity vs. peak forward current

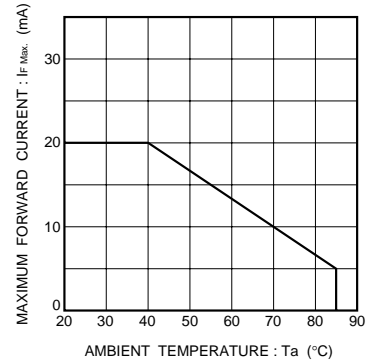


Fig.14 Maximum forward current vs. ambient temperature

LED lamps

●Electrical characteristic curves 3 (yellow)

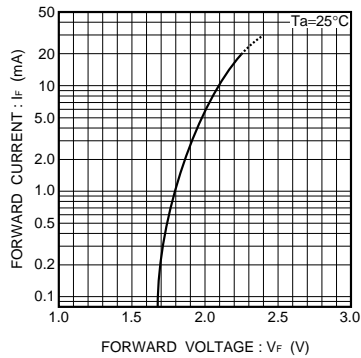


Fig.15 Forward current vs. forward voltage

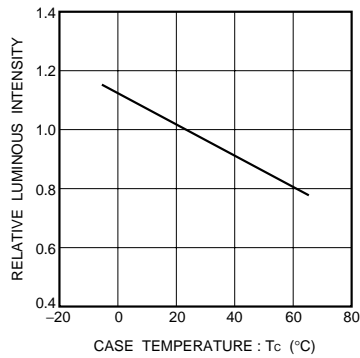


Fig.16 Luminous intensity vs. case temperature

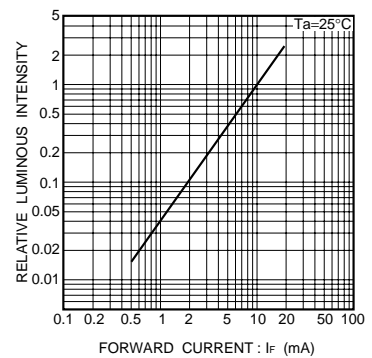


Fig.17 Luminous intensity vs. forward current

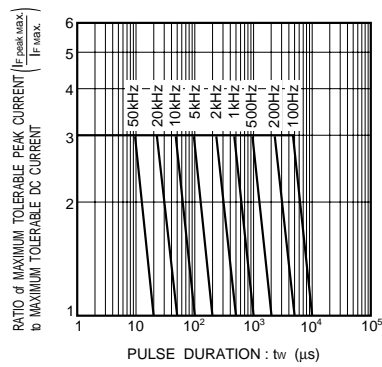


Fig.18 Maximum tolerable peak current vs. pulse duration

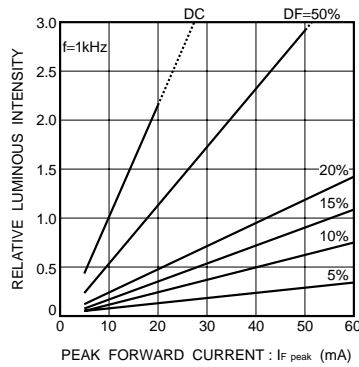


Fig.19 Luminous intensity vs. peak forward current

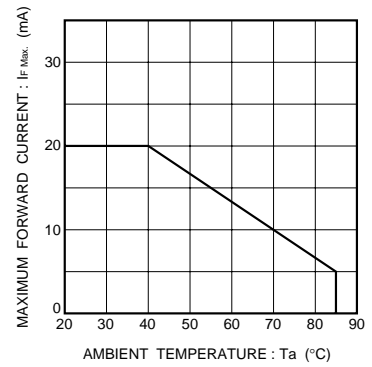


Fig.20 Maximum forward current vs. ambient temperature

LED lamps

●Electrical characteristic curves 4 (green)

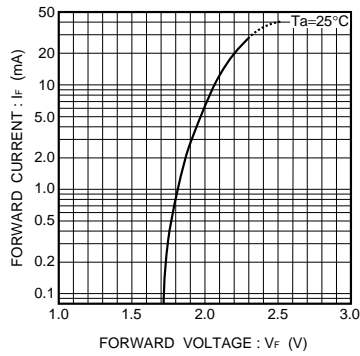


Fig.21 Forward current vs. forward voltage

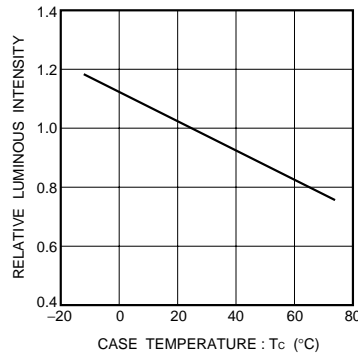


Fig.22 Luminous intensity vs. case temperature

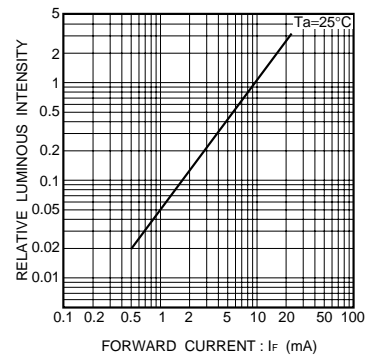


Fig.23 Luminous intensity vs. forward current

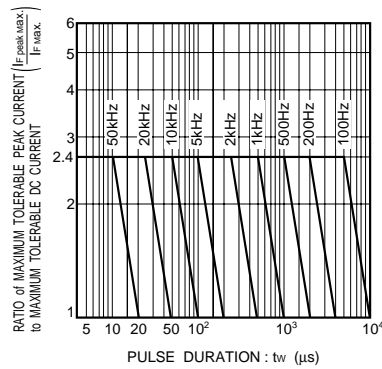


Fig.24 Maximum tolerable peak current vs. pulse duration

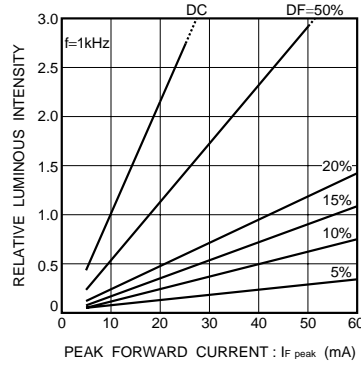


Fig.25 Luminous intensity vs. peak forward current

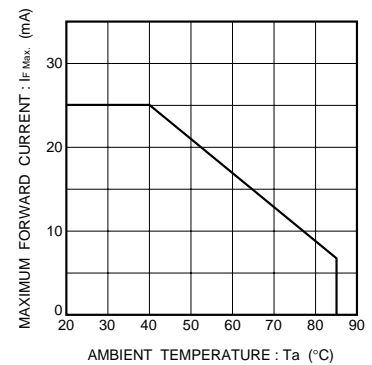


Fig.26 Maximum forward current vs. ambient temperature