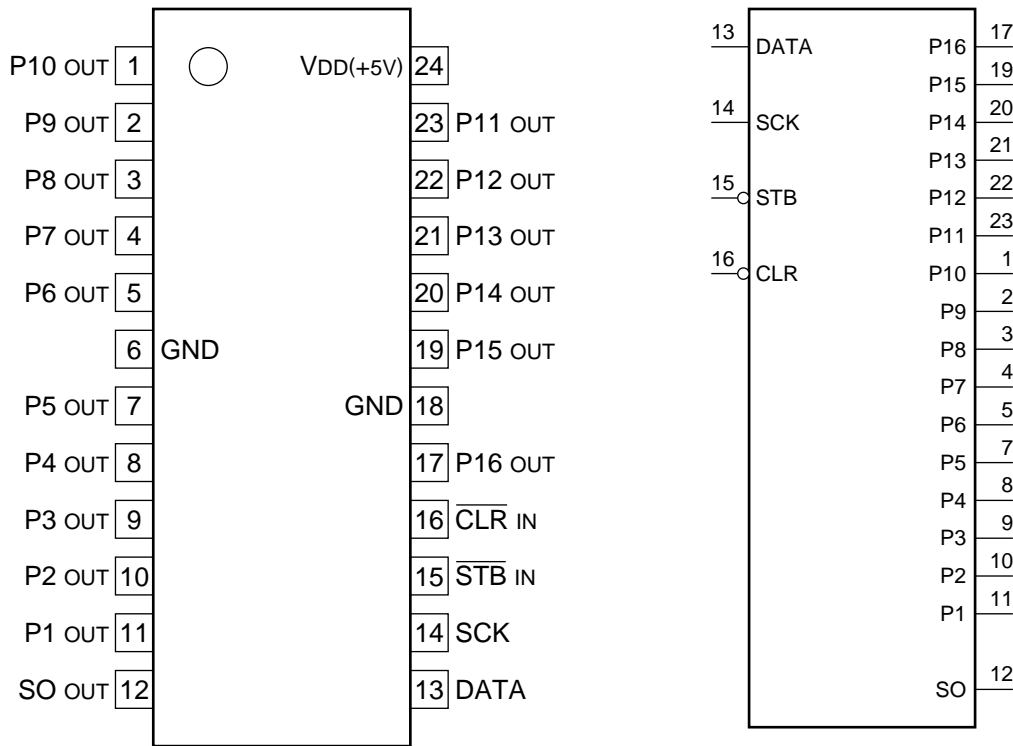

C-MOS SERIAL TO PARALLEL CONVERTER

—TOP VIEW—



INPUT

- $\overline{\text{CLR}}$; CLEAR
- DATA ; SERIAL DATA
- SCK ; CLOCK
- $\overline{\text{STB}}$; STROBE

OUTPUT

- P1 - P16 ; PARALLEL DATA
- SO ; SERIAL DATA

