

# MEMS Mass Flow Sensor

## D6F-03A3-000

**Compact, sensors featuring MEMS technology for precision mass airflow measurement.**

- Precision unidirectional mass airflow up to 3 LPM
- Fast Response (< 5 msec, typical)
- Ultra-compact size 36.6 (L) x 8 (W) x 16.8 (H) mm
- Low power consumption
- RoHS Compliant



## Ordering Information

Description	Case	Applicable gas	Flow range**	Model
Mass Flow Sensor	Thermoplastic resin / Aluminum Alloy	Air*	0-3L/min	D6F-03A3-000
Cable Connector Assembly	---	---	---	D6F-CABLE2

**Note:** Cable Assembly is sold separately.

\* Contact Omron for other gases.

\*\*Mass flow converted to volumetric flow (standard liters per minute) at 0°C and 1 atm.

## Application examples

- Pick and place systems
- Industrial processes
- Leak detection
- Spectroscopy
- Mass flow controllers
- Scientific / test equipment
- Environmental comfort controls
- Fuel cell controls

## Ratings

### Absolute Maximum Rating

Item	Symbol	Rating	Unit
Power supply	$V_{CC}$	26.4	VDC
Output voltage	$V_{OUT}$	6	VDC

### Electrical Performance

Item	Symbol	Condition	Min.	Max.	Unit
Power supply	$V_{CC}$	—	10.8	26.4	VDC
Operating temperature	$T_{OPR}$	No condensation or icing	0	50	°C
Output voltage (max.)	$V_{OH}$	Load resistance: 10k $\Omega$	5	5.7	VDC
Output voltage (min.)	$V_{OL}$	Load resistance: 10k $\Omega$	0	1	VDC


# Characteristics

<b>Model</b>	<b>D6F-03A3-000</b>
<b>Flow rate @ 0°C and 101.3 kPa</b>	0-3L/min
<b>Case material</b>	Thermoplastic resin
<b>Applicable gas*</b>	Air
<b>Electrical connection</b>	Connector (3 wire)
<b>Withstand pressure (max.)</b>	200kPa (about 30 psi)
<b>Accuracy</b>	±5% F.S. max of detected characteristics at 25°C
<b>Operating temperature</b>	0 to 50°C (with no icing or condensation)
<b>Storage temperature</b>	-10 to 60°C (with no icing or condensation)
<b>Operating and Storage humidity</b>	85% RH max (with no icing or condensation)
<b>Power supply voltage</b>	10.8 to 26.4 VDC
<b>Output signal</b>	1 to 5 VDC, Analog Output (Load resistance: 10kΩ)
<b>Current consumption</b>	15 mA max. (No-Load with V <sub>CC</sub> = 12 to 24 VDC, V <sub>SS</sub> = 0V and 25°C)
<b>Insulation resistance</b>	20MΩ min. at 500 VDC, between lead terminal and case
<b>Dielectric strength</b>	500 VAC, 50/60 Hz, for 1 minute. (Leakage current typ <1 mA.), between the lead terminals and case

\* Contact Omron for other gases.

# Operating Characteristics

## D6F-03A3-000

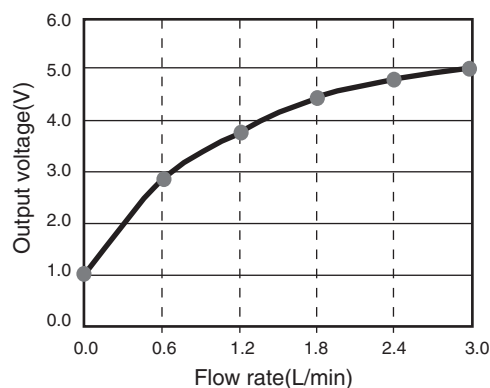


## D6F-03A3-000

<b>Flow Rate (LPM)</b>	0	0.6	1.2	1.8	2.4	3.0
<b>Output Voltage (VDC)</b>	1.00 ± 0.2	2.83 ± 0.2	3.77 ± 0.2	4.34 ± 0.2	4.72 ± 0.2	5.00 ± 0.2

# Test Results (typical performance)


(5 samples, repeated 10 times each)

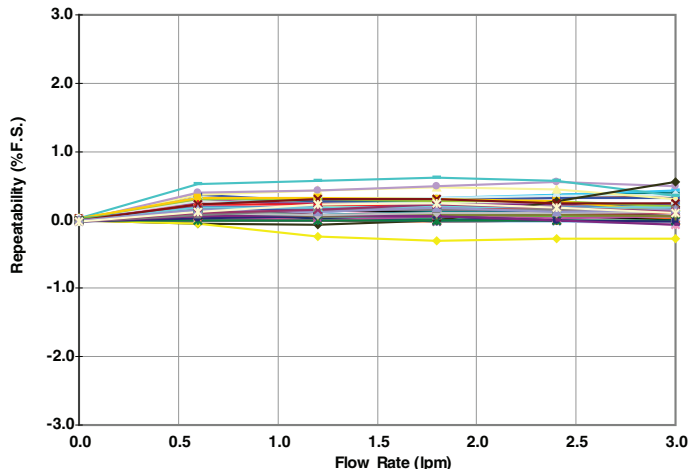

## Dimensions

Unit: mm


### D6F-03A3-000

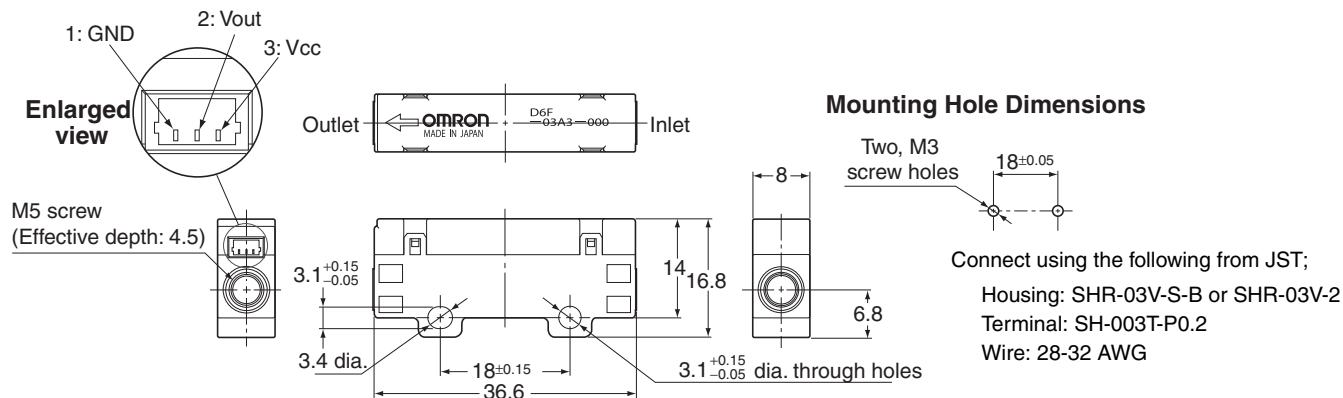

- Note:**
- When installing the pipes, use M5 screws for the joints and tighten to a torque of 1.5 N•m max. Use sealing tape to make the joints airtight.
  - Mount to a flat surface using an M3 pan head screw, tightened to 0.59 N•m max. torque.

### Applicable Cable for D6F-03A3-000 (Optional - sold separately)

part number: D6F-CABLE2

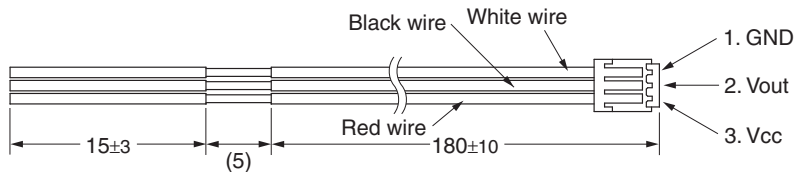

**Note:** Be sure to read the precautions and information common to all D6F sensors, contained in the Technical User's Guide, "D6F Technical Information" for correct use.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at [http://www.components.omron.com/components/web/webfiles.nsf/sales\\_terms.html](http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html)

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**  
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

---

**OMRON**<sup>®</sup>

**OMRON ELECTRONIC  
COMPONENTS LLC**

55 E. Commerce Drive, Suite B  
Schaumburg, IL 60173

**847-882-2288**

**OMRON ON-LINE**

Global - <http://www.omron.com>

USA - <http://www.components.omron.com>