





011100

DEVICE 01 IS INACTIVE FOR NEW DESIGN AS OF 21 AUG.87 USE M38510/37301B--.												REVISIONS							
LTR		DESCRIPTION										DATE		APPROVED					
A		Add figure 3. Change t_{PHL} and footnotes in table I. Editorial changes throughout.										4 APR 1988							
REV																			
PAGE																			
REV STATUS OF PAGES		REV		A	A	A	A	A	A	A	A	A	A	A	A	A	A		
		PAGES		1	2	3	4	5	6	7	8	9	10						
Defense Electronics Supply Center Dayton, Ohio Original date of drawing: 21 August 1987 AMSC N/A				PREPARED BY 										MILITARY DRAWING This drawing is available for use by all Departments and Agencies of the Department of Defense					
				CHECKED BY 															
				APPROVED BY 										TITLE: MICROCIRCUITS, DIGITAL, BIPOLAR, ADVANCED LOW POWER SCHOTTKY TTL, NOR GATES, MONOLITHIC SILICON					
				SIZE		CODE IDENT. NO.												DWG NO.	
A		67268								5962-86844									
REV		A										PAGE 1 OF 10							

5962-E824-8

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DESC FORM 193
MAY 86

1. SCOPE

1.1 Scope. This drawing describes device requirements for class B microcircuits in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices".

1.2 Part number. The complete part number shall be as shown in the following example:

5962-86844	01	D	X
-----	-----	-----	-----
Drawing number	Device type (1.2.1)	Case outline (1.2.2)	Lead finish per MIL-M-38510

1.2.1 Device type. The device type shall identify the circuit function as follows:

Device type	Generic number	Circuit function
01	54ALS02	Quadruple, two-input positive NOR gate

1.2.2 Case outlines. The case outlines shall be as designated in appendix C of MIL-M-38510, and as follows:

Outline letter	Case outline
D	F-2 (14-lead, .390" x .260" x .085"), flat package
2	C-2 (20 terminal, .358" x .358" x .100"), square chip carrier package

1.3 Absolute maximum ratings.

Supply voltage range - - - - -	0.5 V dc minimum to +7.0 V dc maximum
Input voltage range - - - - -	-1.5 V dc at -18 mA to +7.0 V dc
Storage temperature - - - - -	-65°C to +150°C
Maximum power dissipation (P_D) per device 1/ - - -	22.0 mW
Lead temperature (soldering, 10 seconds) - - - -	+300°C
Thermal resistance, junction-to-case (θ_{JC}) - - -	See MIL-M-38510, appendix C
Junction temperature (T_J) - - - - -	+175°C

1.4 Recommended operating conditions.

Supply voltage range (V_{CC}) - - - - -	+4.5 V dc minimum to +5.5 V dc maximum
Minimum high level input voltage (V_{IH}) - - - - -	2.0 V dc
Maximum low level input voltage (V_{IL}):	
$T_C = +125^\circ\text{C}$ - - - - -	0.7 V dc
$T_C = -55^\circ\text{C}$ - - - - -	0.8 V dc
$T_C = +25^\circ\text{C}$ - - - - -	0.8 V dc
Case operating temperature range (T_C) - - - - -	-55°C to +125°C

1/ Maximum power dissipation is defined as $V_{CC} \cdot I_{CC}$, and must withstand the added P_D due to short circuit test; e.g., I_O .

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-86844	
		REVISION LEVEL A	SHEET 2

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987-549-096

2. APPLICABLE DOCUMENTS

2.1 Government specification and standard. Unless otherwise specified, the following specification and standard, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this drawing to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of the specification and standard required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing shall take precedence.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with 1.2.1 of MIL-STD-883, "Provisions for the use of MIL-STD-883 in conjunction with compliant non-JAN devices" and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Terminal connections and logic diagram. The terminal connections and logic diagram shall be as specified on figure 1.

3.2.2 Truth table. The truth table shall be as specified on figure 2.

3.2.3 Switching waveforms and test circuit. The switching waveforms and test circuit shall be as specified on figure 3.

3.2.4 Case outlines. The case outlines shall be in accordance with 1.2.2 herein.

3.3 Electrical performance characteristics. Unless otherwise specified, the electrical performance characteristics are as specified in table I and apply over the full case operating temperature range.

3.4 Marking. Marking shall be in accordance with MIL-STD-883 (see 3.1 herein). The part shall be marked with the part number listed in 1.2 herein. In addition, the manufacturer's part number may also be marked as listed in 6.4 herein.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-86844
		REVISION LEVEL A	SHEET 3

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987-549-696

TABLE I. Electrical performance characteristics. 1/ 2/

Test	Symbol	Conditions -55°C ≤ T _C ≤ +125°C unless otherwise specified	Group A subgroups	Limits		Unit
				Min	Max	
High level output voltage	V _{OH}	V _{IH} = 2.0 V V _{CC} = 4.5 V I _{OH} = -0.4 mA	V _{IL} = 0.8 V 1,3	2.5		V
		3/ 4/ V _{IL} = 0.7 V	2			
Low level output voltage	V _{OL}	V _{IH} = 2.0 V V _{CC} = 4.5 V I _{OL} = 4.0 mA	V _{IL} = 0.8 V 1,3		0.4	V
		4/ 5/ V _{IL} = 0.7 V	2			
Input clamp voltage	V _{IC}	V _{CC} = 4.5 V I _{IN} = -18 mA	1,2,3		-1.5	V
High level input current	I _{IH1}	V _{CC} = 5.5 V V _{IN} = 2.7 V All other inputs = 0.0 V	1,2,3		20	μA
	I _{IH2}	V _{CC} = 5.5 V V _{IN} = 7.0 V All other inputs = 0.0 V	1,2,3		100	μA
Low level input current	I _{IL}	V _{CC} = 5.5 V V _{IN} = 0.4 V All other inputs = 4.5 V	1,2,3		-0.1	mA
Output current	I _O	V _{CC} = 5.5 V V _{OUT} = 2.25 V 6/	1,2,3	-30	-112	mA
High level supply current	I _{CCH}	V _{CC} = 5.5 V V _{IN} < 0.4 V All inputs	1,2,3		2.2	mA
Low level supply current	I _{CCL}	V _{CC} = 5.5 V V _{IN} > 4.5 V All inputs	1,2,3		4.0	mA
Functional tests		See 4.3.1c 7/	7,8			
Propagation delay time, A, B to Y	t _{PHL}	V _{CC} = 4.5 V to 5.5 V C _L = 50 pF R _L = 500Ω	9,10,11	1	7.5	ns
	t _{PLH}	See figure 3 8/	9,10,11	1	16	ns

1/ Unused inputs that do not directly control the pin under test must be ≥ 2.5 V or ≤ 0.4 V.

2/ Unused inputs shall not exceed 5.5 V or go less than 0.0 V. No inputs shall be floated.

**STANDARDIZED
MILITARY DRAWING**DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO 45444SIZE
A

5962-86844

REVISION LEVEL

A

SHEET

4

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987-549-096

- 3/ One input to gate under test must be = V_{IL} , the other inputs shall be ≤ 0.7 V.
- 4/ All outputs must be tested. In the case where only one input at V_{IL} maximum or V_{IH} minimum produces the proper output state, the test must be performed with each input being selected as the V_{IL} maximum or V_{IH} minimum input.
- 5/ One input to gate under test must be = V_{IH} , the other inputs shall be ≤ 0.7 V.
- 6/ The output conditions have been chosen to produce a current that closely approximates one-half of the true short circuit output current, I_{OS} . Not more than one output will be tested at a time and the duration of the test condition shall not exceed 1 second.
- 7/ Functional tests shall be conducted at input test conditions of 0.0 V $\leq V_{IL} \leq V_{OL}$ and $V_{OH} \leq V_{IH} \leq V_{CC}$.
- 8/ The propagation delay limits are based on single output switching. Unused inputs = 3.5 V or ≤ 0.3 V.

3.5 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in 6.4. The certificate of compliance submitted to DESC-ECS prior to listing as an approved source of supply shall state that the manufacturer's product meets the requirements of MIL-STD-883 (see 3.1 herein) and the requirements herein.

3.6 Certificate of conformance. A certificate of conformance as required in MIL-STD-883 (see 3.1 herein) shall be provided with each lot of microcircuits delivered to this drawing.

3.7 Notification of change. Notification of change to DESC-ECS shall be required in accordance with MIL-STD-883 (see 3.1 herein).

3.8 Verification and review. DESC, DESC's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with section 4 of MIL-M-38510 to the extent specified in MIL-STD-883 (see 3.1 herein).

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

- a. Burn-in test, method 1015 of MIL-STD-883.
 - (1) Test condition A, B, C, or D using the circuit submitted with the certificate of compliance (see 3.5 herein).
 - (2) $T_A = +125^{\circ}\text{C}$, minimum.
- b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-86844
		REVISION LEVEL A	SHEET 5

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE 1987-549-196

4.3.1 Group A inspection.

- a. Tests shall be as specified in table II herein.
- b. Subgroups 4, 5, and 6 in table I, method 5005 of MIL-STD-883 shall be omitted.
- c. Subgroups 7 and 8 tests shall verify the truth table as specified on figure 2 herein.

4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883.
 - (1) Test condition A, B, C or D using the circuit submitted with the certificate of compliance (see 3.5 herein).
 - (2) $T_A = +125^{\circ}\text{C}$, minimum.
 - (3) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (per method 5005, table I)
Interim electrical parameters (method 5004)	---
Final electrical test parameters (method 5004)	1*, 2, 3, 7, 8 9, 10, 11
Group A test requirements (method 5005)	1, 2, 3, 7, 8 9, 10, 11
Groups C and D end-point electrical parameters (method 5005)	1, 2, 3

* PDA applies to subgroup 1.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-38510.


6. NOTES

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A		5962-86844
		REVISION LEVEL A	SHEET 6


DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE 1987-549-096

Case D

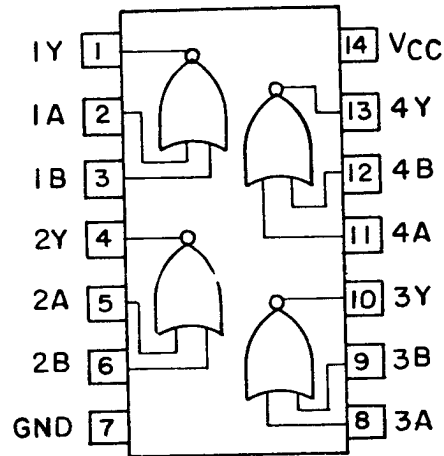

Case 2

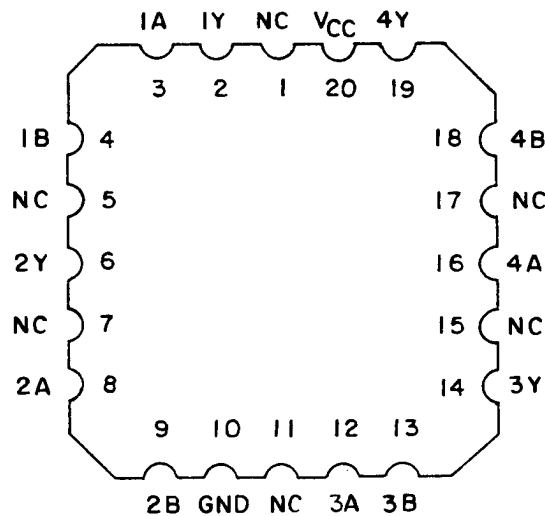

(TOP VIEW)

FIGURE 1. Terminal connections and logic diagram.

**STANDARDIZED
MILITARY DRAWING**

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO 45444

SIZE
A

5962-86844

REVISION LEVEL

SHEET 7

DESC FORM 193A
SEP 87

U.S. GOVERNMENT PRINTING OFFICE: 1987 - 748-179-609/3

Truth table (each gate)		
Inputs		Output
A	B	Y
L	L	H
L	H	L
H	L	L
H	H	L



$Y = \overline{A + B}$
 H = High voltage level
 L = Low voltage level

FIGURE 2. Truth table.

STANDARDIZED MILITARY DRAWING DEFENSE ELECTRONICS SUPPLY CENTER DAYTON, OHIO 45444	SIZE A	5962-86844	
		REVISION LEVEL A	SHEET 8

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1967 748-129 MP913

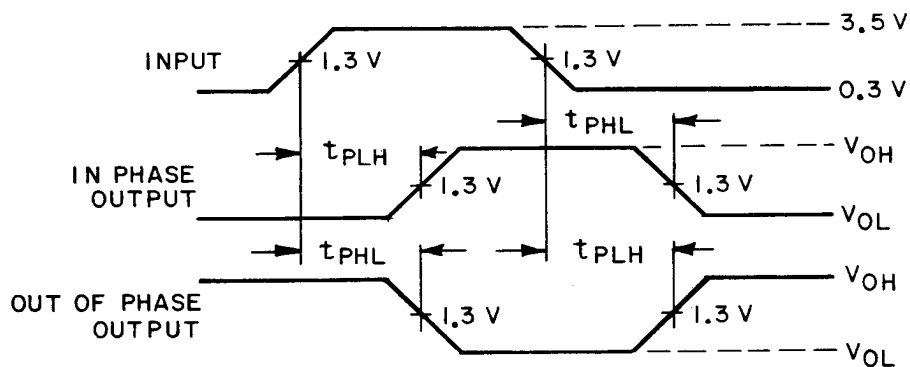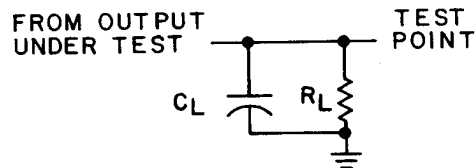

NOTES:

1. C_L includes probe and jig capacitance.
2. All input pulses have the following characteristics: $PRR \leq 10$ MHz, duty cycle = 50%, $t_r = t_f = 3$ ns ± 1 ns.
3. The outputs are measured one at a time with one input transition per measurement.

FIGURE 3. Switching waveforms and test circuit.

**STANDARDIZED
MILITARY DRAWING**

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO 45444

SIZE
A

5962-86844

REVISION LEVEL **A**

SHEET **9**

DESC FORM 193A
SEP 87

U.S. GOVERNMENT PRINTING OFFICE: 1987 748 129 64913

6.1 Intended use. Microcircuits conforming to this drawing are intended for use when military specifications do not exist and qualified military devices that will perform the required function are not available for OEM application. When a military specification exists and the product covered by this drawing has been qualified for listing on QPL-38510, the device specified herein will be inactivated and will not be used for new design. The QPL-38510 product shall be the preferred item for all applications.

6.2 Replaceability. Replaceability is determined as follows:

- a. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.
- b. When a QPL source is established, the part numbered device specified in this drawing will be replaced by the microcircuit identified as part number M38510/37301B--.

6.3 Comments. Comments on this drawing should be directed to DESC-ECS, Dayton, Ohio 45444, or telephone 513-296-5375.

6.4 Approved sources of supply. Approved sources of supply are listed herein. Additional sources will be added as they become available. The vendors listed herein have agreed to this drawing and a certificate of compliance (see 3.5 herein) has been submitted to DESC-ECS.

Military drawing part number	Vendor CAGE number	Vendor similar part number <u>1/</u>	Replacement military specification part number
5962-8684401DX <u>2/</u>	27014 18324 01295	54ALS02W/883 54ALS02/BDA SNJ54ALS02W	M38510/37301BDX
5962-86844012X <u>2/</u>	27014 18324 01295	54ALS02E/883 54ALS02/B2A SNJ54ALS02FK	M38510/37301B2X

1/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

2/ This device is inactive for new design. Use QPL device.

Vendor CAGE number

01295

18324

27014

Vendor name and address

Texas Instruments, Incorporated
P.O. Box 6448
Midland, TX 79701

Signetics Corporation
4130 South Market Court
Sacramento, CA 95834

National Semiconductor Corporation
2900 Semiconductor Drive
Santa Clara, CA 95051

**STANDARDIZED
MILITARY DRAWING**

DEFENSE ELECTRONICS SUPPLY CENTER
DAYTON, OHIO 45444

SIZE
A

5962-86844

REVISION LEVEL
A

SHEET
10

DESC FORM 193A
SEP 87

☆ U.S. GOVERNMENT PRINTING OFFICE: 1987-549-096

011940