



AK5362048AWP 2,097,152 Word by 36 Bit CMOS Dynamic Random Access Memory

DESCRIPTION

The Accutek AK5362048AWP high density memory module is a CMOS dynamic RAM organized in 2048K x 36 bit words. The module consists of four standard 1 Meg x 18 DRAMs in plastic SOJ packages. The assembly has 2 drams mounted on each side of a printed circuit board in a 72 pad leadless SIM configuration.

This configuration allows socket-mounting of large quantities of memory in applications where high density and ease of inserting additional memory are important.

The operation of the AK5362048A is identical to sixteen 1M x 4 plus eight 1M x 1 Drams. There are four $\overline{\text{CAS}}$ lines and four $\overline{\text{RAS}}$ lines. On each bank of 1M x 36, independent byte control is accomplished by four $\overline{\text{CAS}}$ lines. Each separate $\overline{\text{CAS}}$ line controls one byte of the 1M x 18 Dram. Two banks of 36 bits are controlled by the two pairs of $\overline{\text{RAS}}$ lines. An eighteen bit data path can be produced by connecting DQ₀ to DQ₁₈, DQ₁ to DQ₁₉, etc. and alternately strobing $\overline{\text{RAS}}_0$ with $\overline{\text{RAS}}_1$ and $\overline{\text{RAS}}_2$ with $\overline{\text{RAS}}_3$.

FEATURES

- 2,097,152 x 36 bit organization
- 72 pad Single In-Line Module
- Multiple $\overline{\text{CAS}}$ and $\overline{\text{RAS}}$ lines allow x18 or x36 bit widths
- $\overline{\text{CAS}}$ -before- $\overline{\text{RAS}}$, $\overline{\text{RAS}}$ -only or hidden refresh
- Operating free air temperature 0°C to 70°C
- Single 5 Volt Power Supply
- 1024 Refresh Cycles, 16 mSEC
- Available in Fast Page Mode and Static Column Mode versions


PIN NOMENCLATURE

DQ ₀ - DQ ₃₅	Data In/Data Out
A ₀ - A ₉	Address Inputs
$\overline{\text{CAS}}_0$ - $\overline{\text{CAS}}_3$	Column Address Strobe
$\overline{\text{RAS}}_0$ - $\overline{\text{RAS}}_3$	Row Address Strobe
$\overline{\text{WE}}$	Write Enable
PD ₁ - PD ₄	Presence Detect
Vcc	5v Supply
Vss	Ground
NC	No Connect

MODULE OPTIONS

Leadless SIM: AK5362048AW

Leaded ZIP: AK5362048AZ

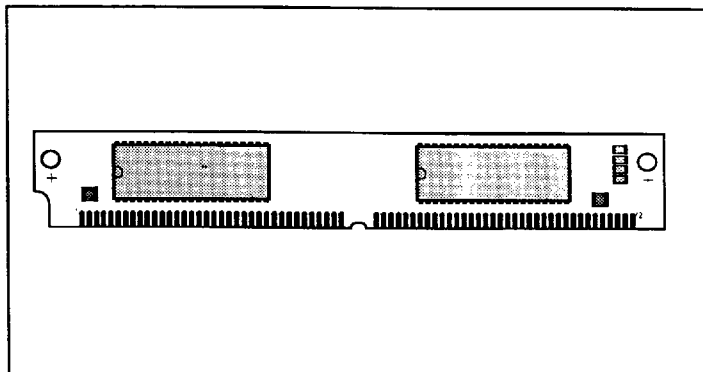

- Power
 - 1.80 Watt Max Active (60nS)
 - 1.66 Watt Max Active (70 nS)
 - 1.44 Watt Max Active (80 nS)
 - 22 mW Max Standby Available
- Downward compatible with AK5361024W, AK536512W and AK536256W
- Upward compatible with AK5364096W and AK5368192W

ADDITIONAL OPTIONS AVAILABLE

1 Meg x 32 version, AK5321024A

1 Meg x 36 version, AK5361024A

2 Meg x 32 version, AK5322048A

PIN ASSIGNMENT

Pin #	Symbol	Pin #	Symbol	Pin #	Symbol	Pin #	Symbol
1	Vss	19	NC	37	DQ17	55	DQ12
2	DQ0	20	DQ4	38	DQ35	56	DQ30
3	DQ18	21	DQ22	39	Vss	57	DQ13
4	DQ1	22	DQ5	40	$\overline{\text{CAS}}_0$	58	DQ31
5	DQ19	23	DQ23	41	$\overline{\text{CAS}}_2$	59	Vcc
6	DQ2	24	DQ6	42	$\overline{\text{CAS}}_3$	60	DQ32
7	DQ20	25	DQ24	43	$\overline{\text{CAS}}_1$	61	DQ14
8	DQ3	26	DQ7	44	$\overline{\text{RAS}}_0$	62	DQ33
9	DQ21	27	DQ25	45	$\overline{\text{RAS}}_1$	63	DQ15
10	Vcc	28	A7	46	NC	64	DQ34
11	NC	29	NC	47	$\overline{\text{WE}}$	65	DQ16
12	A0	30	Vcc	48	NC	66	NC
13	A1	31	A8	49	DQ9	67	PD1
14	A2	32	A9	50	DQ27	68	PD2
15	A3	33	$\overline{\text{RAS}}_3$	51	DQ10	69	PD3
16	A4	34	$\overline{\text{RAS}}_2$	52	DQ28	70	PD4
17	A5	35	DQ26	53	DQ11	71	NC
18	A6	36	DQ8	54	DQ29	72	Vss

Presence Detect - 1 Meg x 36


	-60	-70	-80
PD1	Vss	Vss	Vss
PD2	Vss	Vss	Vss
PD3	NC	Vss	NC
PD4	NC	NC	Vss

Presence Detect - 2 Meg x 36


	-60	-70	-80
PD1	NC	NC	NC
PD2	NC	NC	NC
PD3	NC	Vss	NC
PD4	NC	NC	Vss

0107647 0000065 800

FUNCTIONAL DIAGRAM

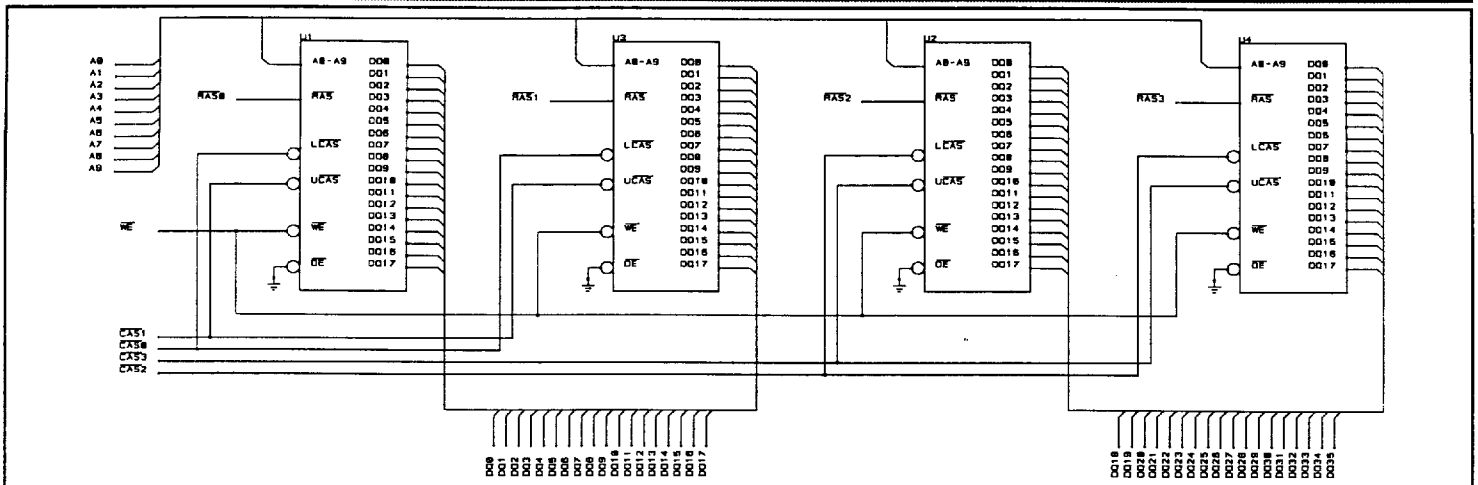

MECHANICAL DIMENSIONS

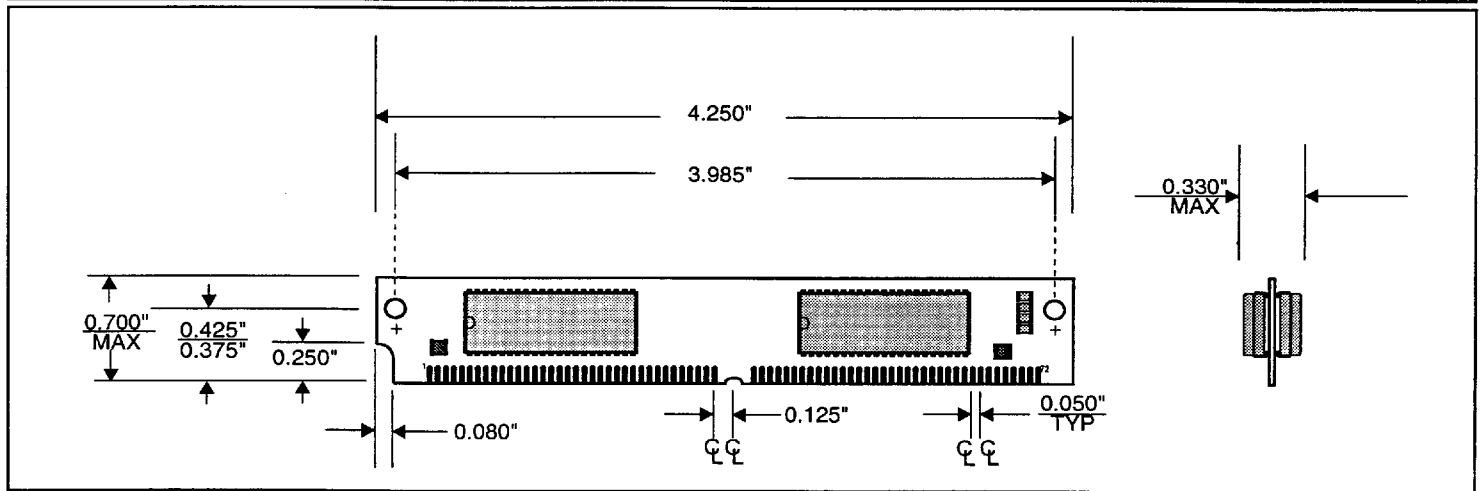


ORDER INFORMATION

PART NUMBER CODING INTERPRETATION

Position	1	2	3	4	5	6	7	8
1 Product	AK = Accutek Memory							
2 Type	4 = Dynamic RAM 5 = CMOS Dynamic RAM 6 = Static RAM							
3 Organization/Word Width	1 = by 1 16 = by 16 4 = by 4 32 = by 32 8 = by 8 36 = by 36 9 = by 9							
4 Size/Bits Depth	64 = 64K 4096 = 4 MEG 256 = 256K 8192 = 8 MEG 1024 = 1 MEG 16384 = 16 MEG							

The numbers and coding on this page do not include all variations available, but are shown as examples of the most widely used variations. Contact Accutek if other information is required.



ACCUTEK MICROCIRCUIT CORPORATION
BUSINESS CENTER at NEWBURYPORT
2 NEW PASTURE ROAD, SUITE 1
NEWBURYPORT, MA 01950-4054
PHONE: 508-465-6200 FAX: 508-462-3396

Position

1 2 3 4 5 6 7 8

5 Package Type	G = Single In-Line Package (SIP) S = Single In-Line Module (SIM) D = Dual In-Line Package (DIP) W = .050 inch Pitch Edge Connect Z = Zig-Zag In-Line Package (ZIP)	
6 Special Designation	P = Page Mode N = Nibble Mode K = Static Column Mode W = Write Per Bit Mode V = Video Ram	
7 Separator	- = Commercial 0°C to +70°C M = Military Equivalent Screened (-55°C to +125°C) I = Industrial Temperature Tested (-45°C to +85°C) X = Burned In	
8 Speed (first two significant digits)	DRAMS	SRAMS
	60 = 60 nS	12 = 12 nS
	70 = 70 nS	20 = 20 nS
	80 = 80 nS	25 = 25 nS
	10 = 100 nS	35 = 35 nS

Accutek Reserves the right to make changes in specifications at any time and without notice. Accutek does not assume any responsibility for the use of any circuitry described; no circuit patent licenses are implied. Preliminary data sheets contain minimum and maximum limits based upon design objectives, which are subject to change upon full characterization over the specific operating conditions.

0107647 0000066 747

2