

**Silicon PNP Power Transistors**

**2N4918 2N4919 2N4920**

**DESCRIPTION**


- With TO-126 package
- Complement to type 2N4921,2N4922 2N4923
- Excellent safe operating area
- Low collector-emitter saturation voltage

**APPLICATIONS**

- For driver circuits ,switching ,and amplifier applications

**PINNING**

PIN	DESCRIPTION
1	Emitter
2	Collector;connected to mounting base
3	Base

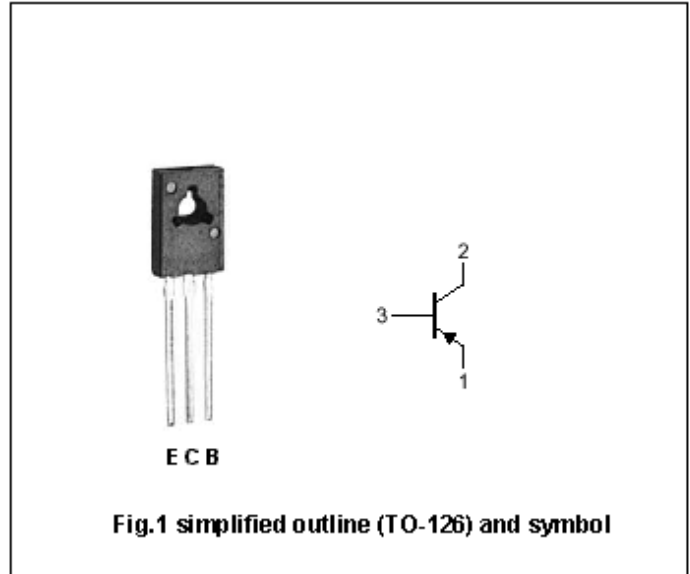

**Absolute maximum ratings(Ta=25 )**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	2N4918	-40	V
		2N4919	-60	
		2N4920	-80	
V <sub>CEO</sub>	Collector-emitter voltage	2N4918	-40	V
		2N4919	-60	
		2N4920	-80	
V <sub>EBO</sub>	Emitter-base voltage	Open collector	-5	V
I <sub>C</sub>	Collector current		-1	A
I <sub>CM</sub>	Collector current-Peak		-3	A
I <sub>B</sub>	Base current		-1	A
P <sub>D</sub>	Total power dissipation	T <sub>C</sub> =25	30	W
T <sub>j</sub>	Junction temperature		150	
T <sub>stg</sub>	Storage temperature		-65~150	

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	VALUE	UNIT
R <sub>th-j-c</sub>	Thermal resistance junction to case	4.16	/W

## Silicon PNP Power Transistors

## 2N4918 2N4919 2N4920

## CHARACTERISTICS

T<sub>j</sub>=25 unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT		
V <sub>CEO</sub>	Collector-emitter sustaining voltage	2N4918	I <sub>C</sub> =-0.1A; I <sub>B</sub> =0	-40			V	
		2N4919		-60				
		2N4920		-80				
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =-1.0A; I <sub>B</sub> =-0.1A			-0.6	V		
V <sub>BEsat</sub>	Emitter-base saturation voltage	I <sub>C</sub> =-1.0A; I <sub>B</sub> =-0.1A			-1.3	V		
V <sub>BE</sub>	Emitter-base on voltage	I <sub>C</sub> =-1A; V <sub>CE</sub> =-1V			-1.3	V		
I <sub>CEO</sub>	Collector cut-off current	2N4918				-0.5	mA	
		2N4919						V <sub>CE</sub> =-30V; I <sub>B</sub> =0
		2N4920						V <sub>CE</sub> =-40V; I <sub>B</sub> =0
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> = Rated V <sub>CBO</sub> ; I <sub>E</sub> =0			-0.1	mA		
I <sub>CEX</sub>	Collector cut-off current	V <sub>CE</sub> = Rated V <sub>CEO</sub> ; V <sub>BE(off)</sub> =1.5V T <sub>C</sub> =125			-0.1 -0.5	mA		
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =-5V; I <sub>C</sub> =0			-1.0	mA		
h <sub>FE-1</sub>	DC current gain	I <sub>C</sub> =-50mA; V <sub>CE</sub> =-1V	40					
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> =-500mA; V <sub>CE</sub> =-1V	30		150			
h <sub>FE-3</sub>	DC current gain	I <sub>C</sub> =-1A; V <sub>CE</sub> =-1V	10					
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =-250mA; V <sub>CE</sub> =-10V; f=1MHz	3.0			MHz		
C <sub>OB</sub>	Output capacitance	f=100kHz; V <sub>CB</sub> =-10V; I <sub>E</sub> =0			100	pF		

Silicon PNP Power Transistors

2N4918 2N4919 2N4920

PACKAGE OUTLINE

