


**NPN Silicon AF Power Transistor**

- For AF driver and output stages
- High collector current
- High current gain
- Low collector-emitter saturation voltage
- Complementary types: BDP 952 ... BDP 956 (PNP)

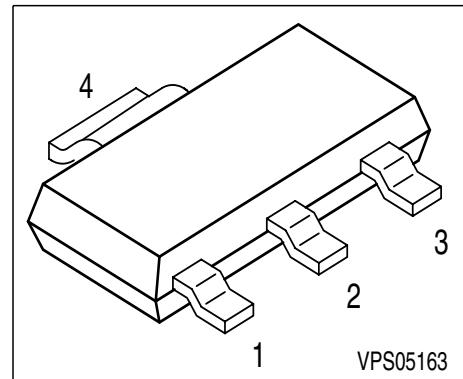

Type	Marking	Pin Configuration				Package
BDP 951	BDP 951	1 = B	2 = C	3 = E	4 = C	SOT-223
BDP 953	BDP 953	1 = B	2 = C	3 = E	4 = C	SOT-223
BDP 955	PDP 955	1 = B	2 = C	3 = E	4 = C	SOT-223

**Maximum Ratings**

Parameter	Symbol	BDP 951	BDP 953	BDP 955	Unit
Collector-emitter voltage	$V_{CEO}$	80	100	120	V
Collector-base voltage	$V_{CBO}$	100	120	140	
Emitter-base voltage	$V_{EBO}$	5	5	5	
DC collector current	$I_C$		3		A
Peak collector current	$I_{CM}$		5		
Base current	$I_B$		200		mA
Peak base current	$I_{BM}$		500		
Total power dissipation, $T_S = 99^\circ\text{C}$	$P_{tot}$		3		W
Junction temperature	$T_j$		150		
Storage temperature	$T_{stg}$		-65 ... 150		

**Thermal Resistance**

Junction ambient <sup>1)</sup>	$R_{thJA}$	$\leq 42$	K/W
Junction - soldering point	$R_{thJS}$	$\leq 17$	

1) Package mounted on pcb 40mm x 40mm x 1.5mm / 6cm<sup>2</sup> Cu

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_C = 10 \text{ mA}, I_B = 0$	$V_{(\text{BR})\text{CEO}}$	80	-	-	V
		100	-	-	
		120	-	-	
Collector-base breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	$V_{(\text{BR})\text{CBO}}$	100	-	-	
		120	-	-	
		140	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(\text{BR})\text{EBO}}$	5	-	-	
		-	-	-	
Collector cutoff current $V_{\text{CB}} = 100 \text{ V}, I_E = 0$	$I_{\text{CBO}}$	-	-	100	nA
Collector cutoff current $V_{\text{CB}} = 100 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$	$I_{\text{CBO}}$	-	-	20	$\mu\text{A}$
Emitter cutoff current $V_{\text{EB}} = 4 \text{ V}, I_C = 0$	$I_{\text{EBO}}$	-	-	100	nA
		-	-	-	
		-	-	-	
DC current gain 1) $I_C = 10 \text{ mA}, V_{\text{CE}} = 5 \text{ V}$ $I_C = 500 \text{ mA}, V_{\text{CE}} = 1 \text{ V}$ $I_C = 2 \text{ A}, V_{\text{CE}} = 2 \text{ V}$	$h_{\text{FE}}$	25	-	-	-
		40	-	475	
		15	-	-	
Collector-emitter saturation voltage1) $I_C = 2 \text{ A}, I_B = 0.2 \text{ A}$	$V_{\text{CEsat}}$	-	-	0.8	V
		-	-	-	
Base-emitter saturation voltage 1) $I_C = 2 \text{ A}, I_B = 0.2 \text{ A}$	$V_{\text{BESat}}$	-	-	1.5	


### AC Characteristics

Transition frequency $I_C = 50 \text{ mA}, V_{\text{CE}} = 10 \text{ V}, f = 100 \text{ MHz}$	$f_T$	-	100	-	MHz
Collector-base capacitance $V_{\text{CB}} = 10 \text{ V}, f = 1 \text{ MHz}$	$C_{\text{cb}}$	-	25	-	pF


1) Pulse test:  $t \leq 300 \mu\text{s}$ ,  $D = 2\%$

**Total power dissipation**  $P_{\text{tot}} = f(T_A^*; T_S)$

\* Package mounted on epoxy

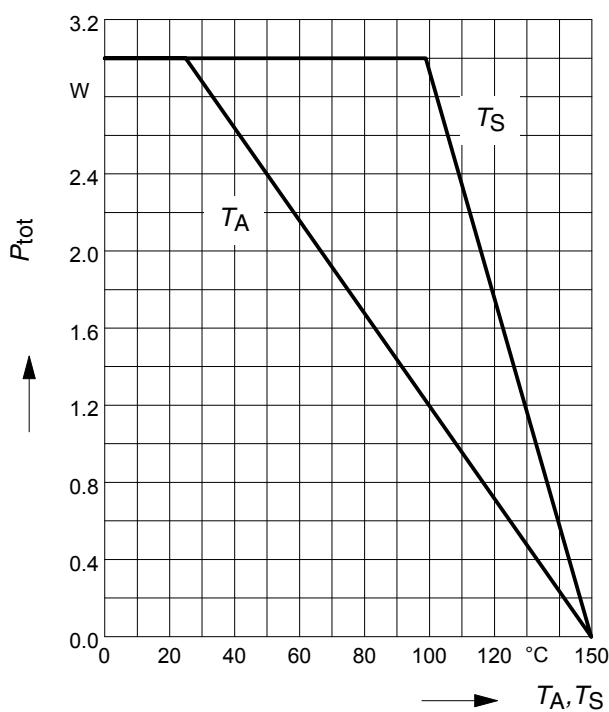


**Permissible Pulse Load**  $R_{\text{thJS}} = f(t_p)$

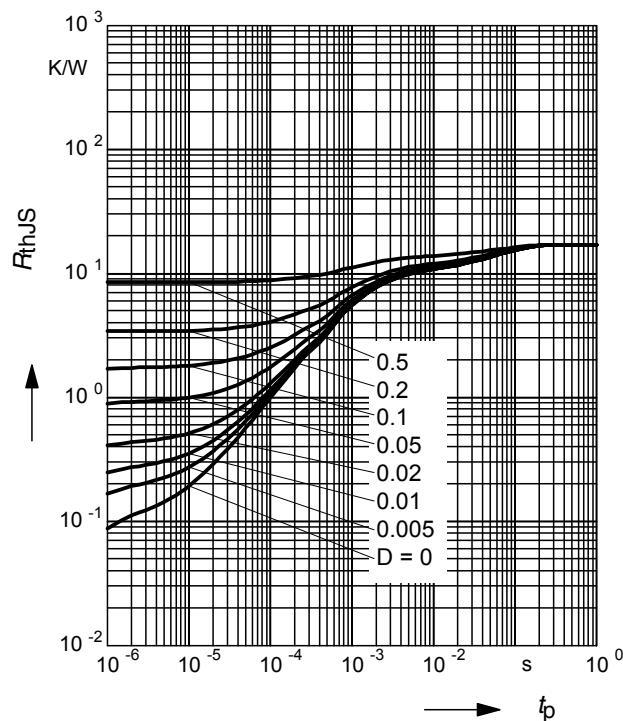


**Permissible Pulse Load**

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

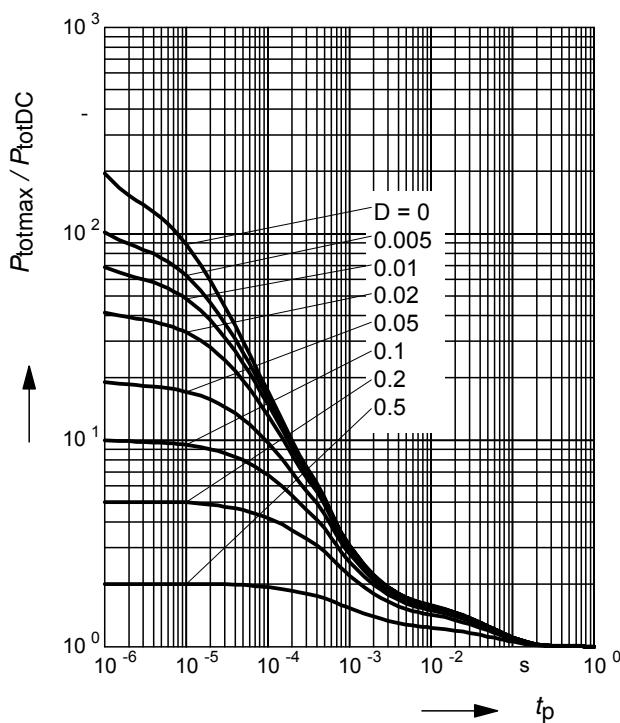


**DC current gain**  $h_{\text{FE}} = f(I_C)$


$V_{\text{CE}} = 2\text{V}$

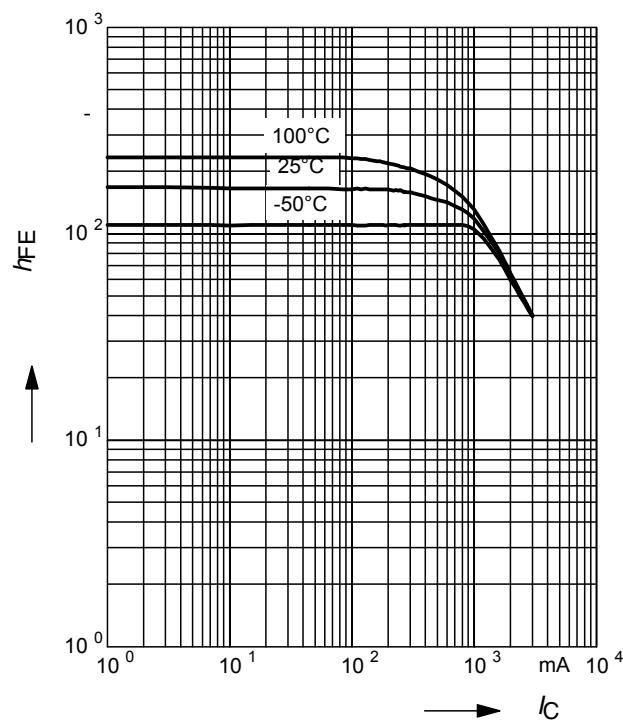


**Collector cutoff current**  $I_{CBO} = f(T_A)$   
 $V_{CB} = 45V$

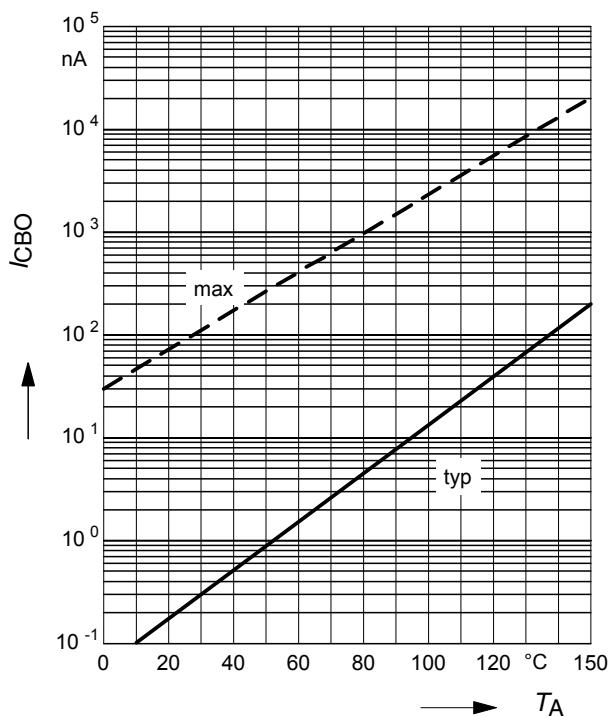

**Base-emitter saturation voltage**  
 $I_C = f(V_{BEsat})$ ,  $h_{FE} = 10$

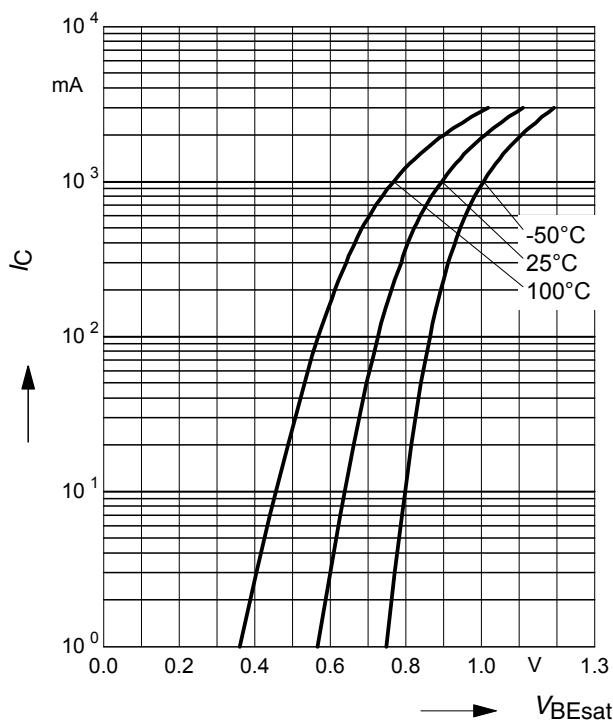

**Collector-emitter saturation voltage**  
 $I_C = f(V_{CEsat})$ ,  $h_{FE} = 10$

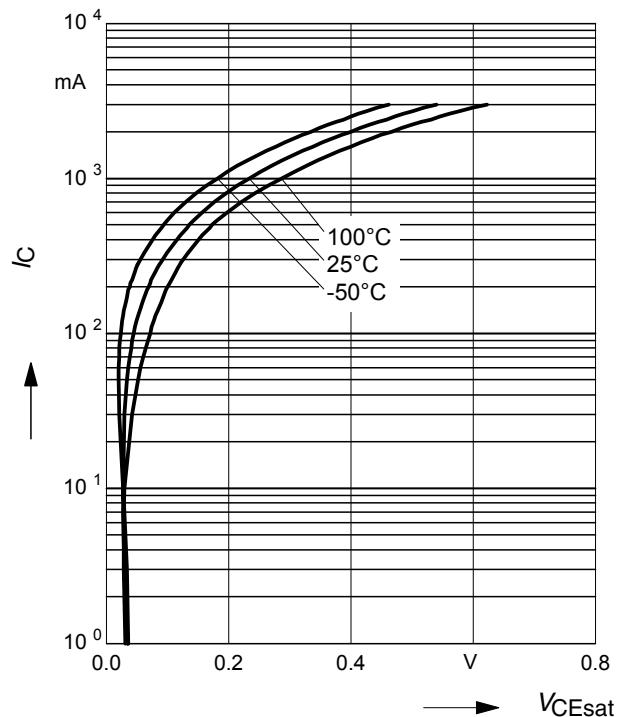

**Collector current**  $I_C = f(V_{BE})$   
 $V_{CE} = 2V$

