

7294621 POWEREX INC

40C 00616 U T-33-13



DATA SHEETS


A-54

TD 54-673 Page 5

Silicon Power Transistors **JEDEC Type 2N3232-3235**

For Switching, Amplifier and
Regulator Applications
7.5 to 15 Amperes, 115 Watts

Dimensions in Inches




Guarantee

Westinghouse warrants to the original purchaser that it will correct any defects in workmanship, by repair or replacement (i.e., factory, for any silicon power transistor bearing this mark) or by refunding the purchase price of the transistor, which is originally included in the price of the device, provided the device is used within manufacturer's published ratings and applied in accordance with good engineering practice. The foregoing warranty is exclusive and in lieu of all other warranties of quality whether written, oral, or implied (including any warranty of merchantability or fitness for purpose). Westinghouse shall not be liable for any consequential damages.

Application

These Westinghouse JEDEC devices are NPN diffused transistors. These general-purpose transistors exhibit low saturation voltage, fast switching time, and high gain and frequency characteristics. They are particularly useful in industrial and commercial power-switching, amplifier, and regulator applications. The temperature range to 200°C permits reliable operation in high ambient, and the hermetically sealed TO-3 case insures maximum reliability and long life. All of these transistors carry the Westinghouse Lifetime Guarantee.

Westinghouse



Maximum Ratings

	JEDEC Number		
	2N3232	2N3233	2N3234
Voltage			
*Collector-Emitter, V_{CE0} , Volts	60	100	160
*Collector-Base, V_{CB0} , Volts	80	110	160
*Emitter-Base, V_{EB0} , Volts	6	6	6
Current			
*Collector, I_C , Amps	7.5	7.5	7.5
*Base, I_B , Amps	3	3	3
Temperature			
*Junction, T_J , °C	—	—	—
*Storage, T_{stg} , °C, minimum	—	—	—
*Storage, T_{stg} , °C, maximum	—	—	—
Thermal Characteristics			
*Thermal Resistance, θ_{JC} , °C/Watt, max.	—	—	—
*Power Dissipation, P_T at 25°C, Watt, max.	—	—	—

7294621 POWEREX INC

40C 00617 D T-33-13

A-55

DATA SHEETS



Electrical Characteristics

 $T_C = 25^\circ\text{C}$ unless otherwise specified

Parameter	Conditions	Symbol	Limits	Units
			Min.	Max.
2N3232 - 2N3234				
*Collector-cutoff current	$V_{CE} = \text{Max. Rating}^\circ, V_{BE} = -1.5\text{V}$	I_{CEV}	...	1 ma
*Collector-cutoff current	$V_{CE} = \text{Max. Rating}^\circ, V_{BE} = -1.5\text{V}, T_C = 150^\circ\text{C}$	I_{CEV}	...	5 ma
*Emitter-cutoff current	$V_{EB} = 6\text{V}, I_C = 0$	I_{EBO}	...	1 ma
*Collector-emitter sustaining voltage ^①	$I_C = 100\text{ mA}, I_B = 0$	$V_{CEO}(\text{sus})$	...	V
*Dc Forward-current transfer ratio ^②	$I_C = 3\text{A}, V_{CE} = 10\text{V}$	h_{FE}	18	55
*Collector-emitter saturation voltage	$I_C = 3\text{A}, I_B = 0.2\text{A}$	$V_{CE}(\text{sat})$	...	V
*Base-emitter voltage	$I_C = 3\text{A}, V_{CE} = 10\text{V}$	V_{BE}	...	3.5 V
*Small-signal forward current transfer ratio	$I_C = 3\text{A}, V_{CE} = 10\text{V}, f = 1\text{ KHz}$	h_{fe}	10	...
2N3235				
*Collector-cutoff current	$V_{CE} = 90\text{V}, V_{BE} = -1.5\text{V}$	I_{CEV}	...	5 ma
*Collector-cutoff current	$V_{CE} = 45\text{V}, V_{BE} = -1.5\text{V}, T_C = 150^\circ\text{C}$	I_{CEV}	...	5 ma
*Emitter-cutoff current	$V_{EB} = 7\text{V}, I_C = 0$	I_{EBO}	...	5 ma
*Collector-emitter sustaining voltage ^①	$I_C = 100\text{ mA}, I_B = 0$	$V_{CEO}(\text{sus})$	55	V
*Dc Forward-current transfer ratio ^②	$I_C = 4\text{A}, V_{CE} = 4\text{V}$	h_{FE}	20	70
*Collector-emitter saturation voltage	$I_C = 4\text{A}, I_B = 0.4\text{A}$	$V_{CE}(\text{sat})$	...	1.1 V
*Base-emitter voltage	$I_C = 4\text{A}, V_{CE} = 4\text{V}$	V_{BE}	...	1.8 V
*Small-signal forward current transfer ratio	$I_C = 4\text{A}, V_{CE} = 4\text{V}, f = 1\text{ KHz}$	h_{fe}	10	...

* JEDEC registered parameters.

① Pulse test: maximum 300 pulses; duty cycle $\leq 2\%$.② $V_{CEO}(\text{sus})$ and V_{CE} (max) for 2N3232, 50V; for 2N3233, 100V; for 2N3234, 160V.

7294621 POWEREX INC

40C 00618

D T-33-13



DATA SHEETS

A-56

Typical Characteristics, 2N3235

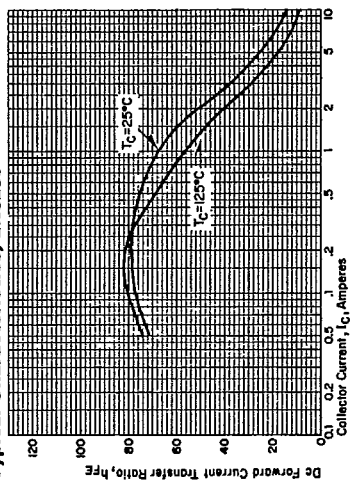


Figure 4. Dc forward current transfer ratio vs. collector current.

Typical Characteristics, 2N3232-2N3234

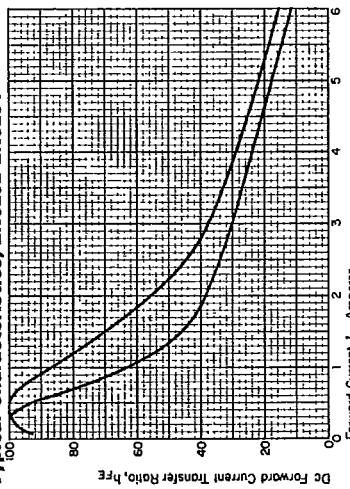


Figure 1. Dc forward current transfer ratio vs. collector current.

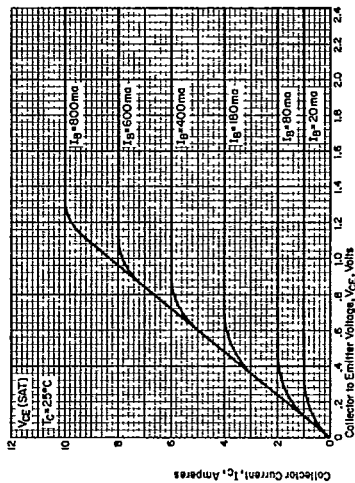


Figure 5. Output characteristics.

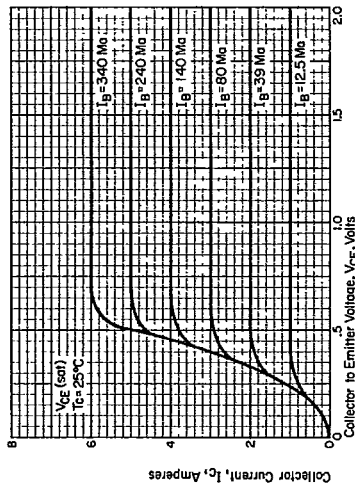


Figure 2. Output characteristics.

7294621 POWEREX INC

40C 00619 D 7-33-13

A-57

DATA SHEETS

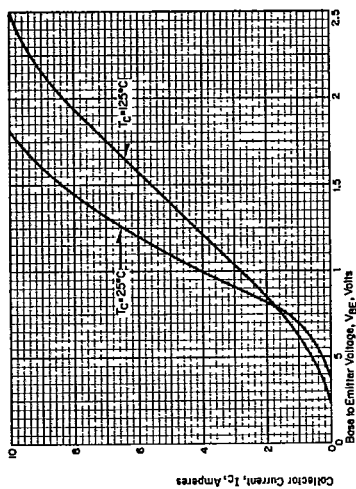


Figure 6. Transconductance characteristics.

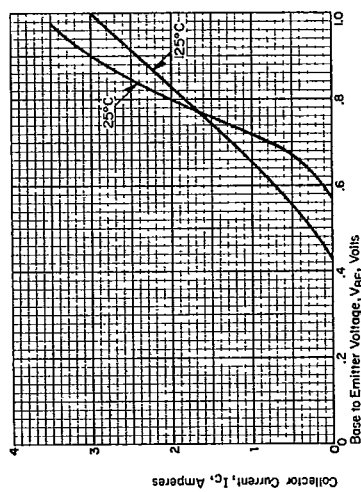


Figure 3. Transconductance characteristics.

February, 1967
New Information
E, D, C/2116/DB; E, D, C/2117

Westinghouse Electric Corporation
Semiconductor Division, Youngwood, Pa. 15697
Printed in USA