


## FAST RECOVERY RECTIFIER DIODE

- VERY HIGH REVERSE VOLTAGE CAPABILITY
- VERY LOW REVERSE RECOVERY TIME
- VERY LOW SWITCHING LOSSES
- LOW NOISE TURN-OFF SWITCHING
- INSULATED: Capacitance 7pF

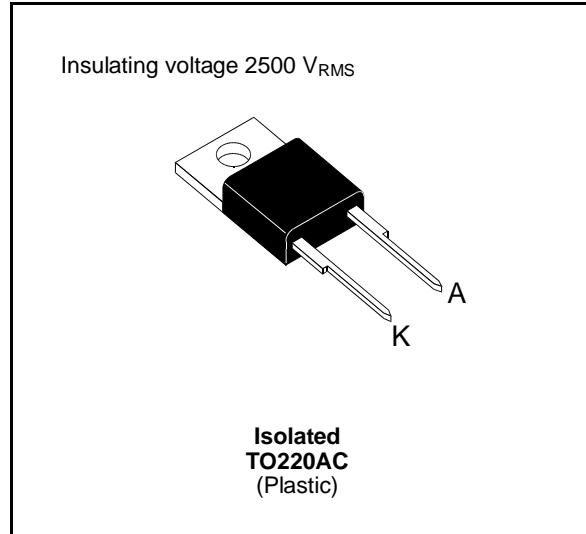

### SUITABLE APPLICATIONS

- FREE WHEELING DIODE IN CONVERTERS AND MOTOR CONTROL CIRCUITS
- RECTIFIER IN S.M.P.S.

### ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter		Value	Unit
$V_{RRM}$	Repetitive Peak Reverse Voltage		1000	V
$V_{RSM}$	Non Repetitive Peak Reverse Voltage		1000	V
$I_{FRM}$	Repetitive Peak Forward Current	$t_p \leq 10\mu s$	150	A
$I_F$ (RMS)	RMS Forward Current		25	A
$I_F$ (AV)	Average Forward Current	$T_c = 50^\circ C$ $\delta = 0.5$	12	A
$I_{FSM}$	Surge non Repetitive Forward Current	$t_p = 10ms$ Sinusoidal	75	A
P	Power Dissipation	$T_c = 50^\circ C$	25	W
$T_{stg}$ $T_j$	Storage and Junction Temperature Range		- 40 to + 150 - 40 to + 150	°C

### THERMAL RESISTANCE

Symbol	Test Conditions	Value	Unit
$R_{th}$ (j - c)	Junction-case	4	°C/W

## ELECTRICAL CHARACTERISTICS

### STATIC CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
$I_R$	$T_j = 25^\circ C$	$V_R = V_{RRM}$			50	$\mu A$
	$T_j = 100^\circ C$				2.5	mA
$V_F$	$T_j = 25^\circ C$	$I_F = 12A$			1.9	V
	$T_j = 100^\circ C$				1.8	

### RECOVERY CHARACTERISTICS

Symbol	Test Conditions			Min.	Typ.	Max.	Unit
$t_{rr}$	$T_j = 25^\circ C$	$I_F = 1A$	$dI_F/dt = -15A/\mu s$	$V_R = 30V$		155	ns
		$I_F = 0.5A$	$I_R = 1A$	$I_{rr} = 0.25A$		65	

### TURN-OFF SWITCHING CHARACTERISTICS (Without Series Inductance)

Symbol	Test Conditions			Min.	Typ.	Max.	Unit
$t_{IRM}$	$dI_F/dt = -50A/\mu s$	$V_{CC} = 200 V$	$I_F = 12A$			200	ns
	$dI_F/dt = -100A/\mu s$			$L_p \leq 0.05\mu H$	$T_j = 100^\circ C$		
$I_{RM}$	$dI_F/dt = -50A/\mu s$	$V_{CC} = 200 V$	$I_F = 12A$			7.8	A
	$dI_F/dt = -100A/\mu s$					9	


### TURN-OFF OVERVOLTAGE COEFFICIENT (With Series Inductance)

Symbol	Test Conditions				Min.	Typ.	Max.	Unit
$C = \frac{V_{RP}}{V_{CC}}$	$T_j = 100^\circ C$	$V_{CC} = 200V$	$I_F = I_{F(AV)}$	$L_p = 12\mu H$			4.5	


To evaluate the conduction losses use the following equations:

$$V_F = 1.47 + 0.026 I_F \quad P = 1.47 \times I_{F(AV)} + 0.026 I_F^2(RMS)$$


**Figure 1. Low frequency power losses versus average current**

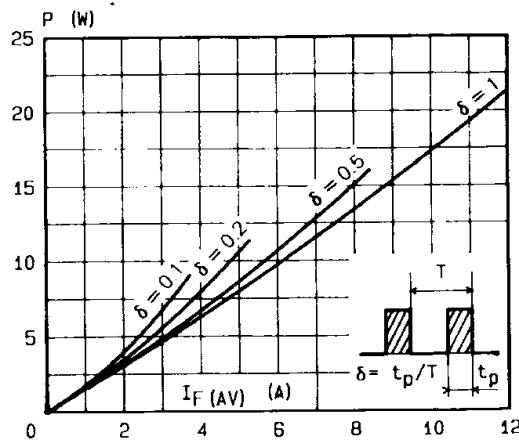


**Figure 2. Peak current versus form factor**

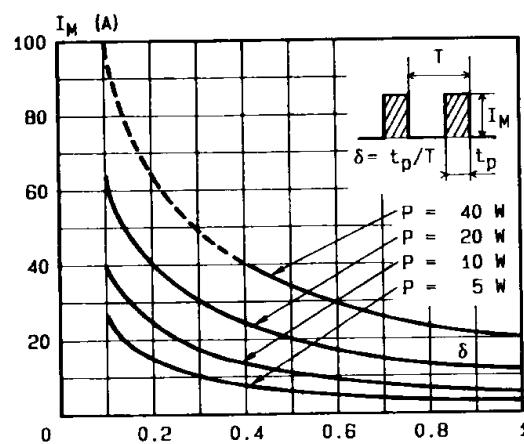


**Figure 3. Non repetitive peak surge current versus overload duration**

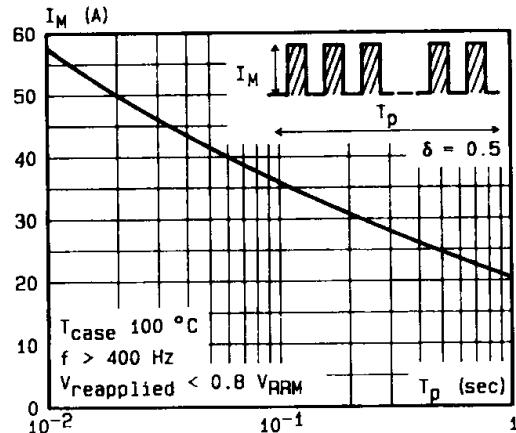


**Figure 5. Voltage drop versus forward current**

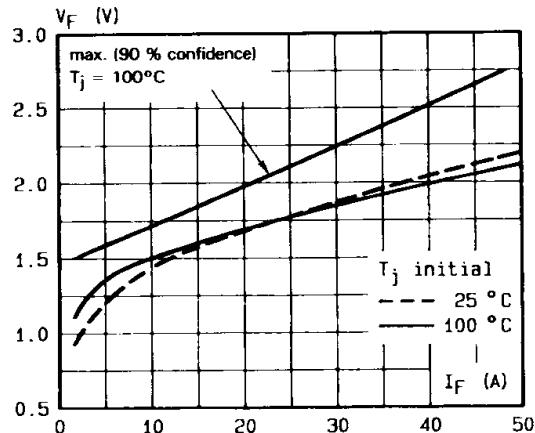


**Figure 7. Recovery time versus  $di_F/dt$**

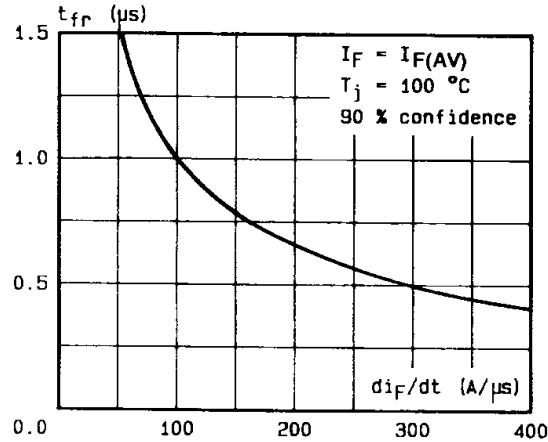


**Figure 4. Thermal impedance versus pulse width**

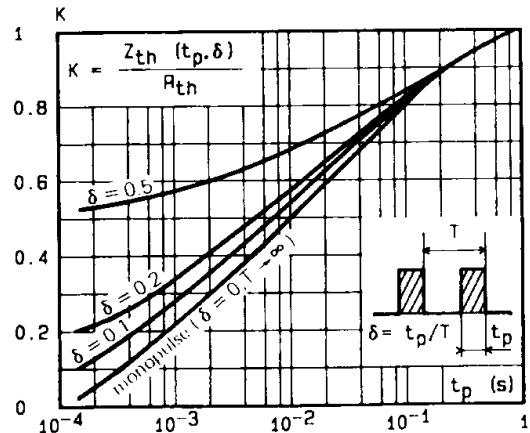


**Figure 6. Recovery charge versus  $di_F/dt$**

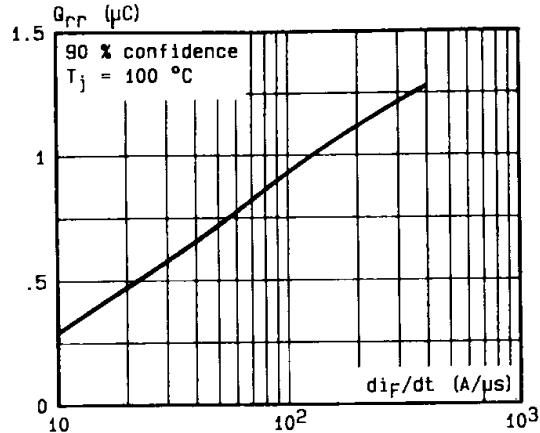

**Figure 8. Peak reverse current versus  $di_F/dt$**

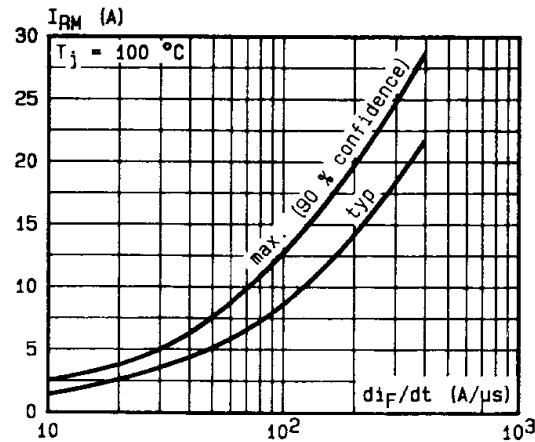


**Figure 9. Peak forward voltage versus  $di_F/dt$ .**

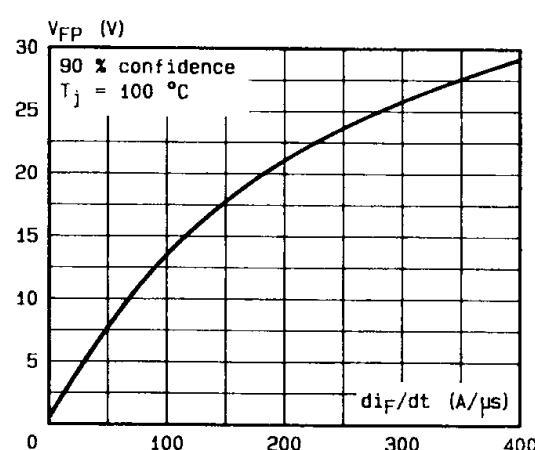


**Figure 10. Dynamic parameters versus junction temperature.**



**Figure 11. Turn-off switching characteristics (without series inductance).**

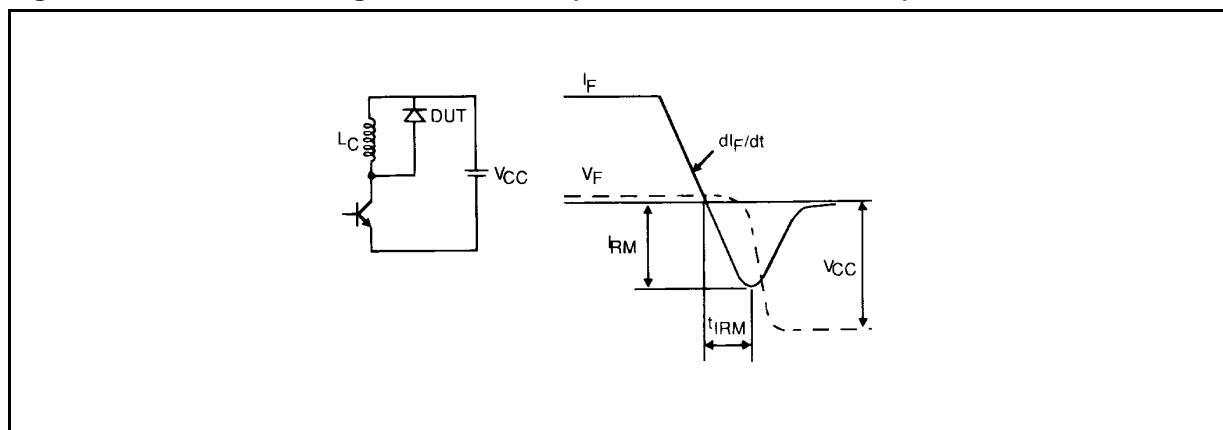


**Figure 12. Turn-off switching characteristics (with series inductance)**

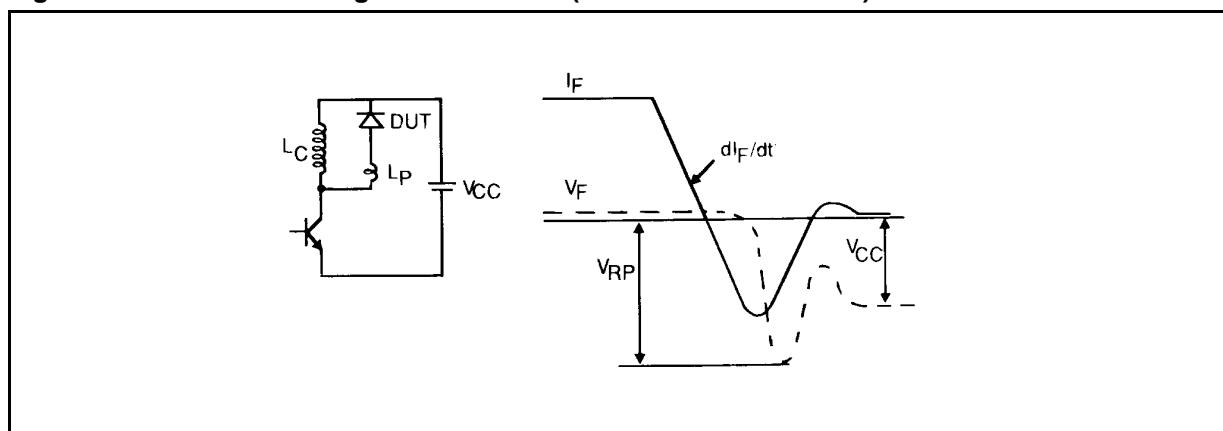

**PACKAGE MECHANICAL DATA :**

Isolated TO220AC Plastic

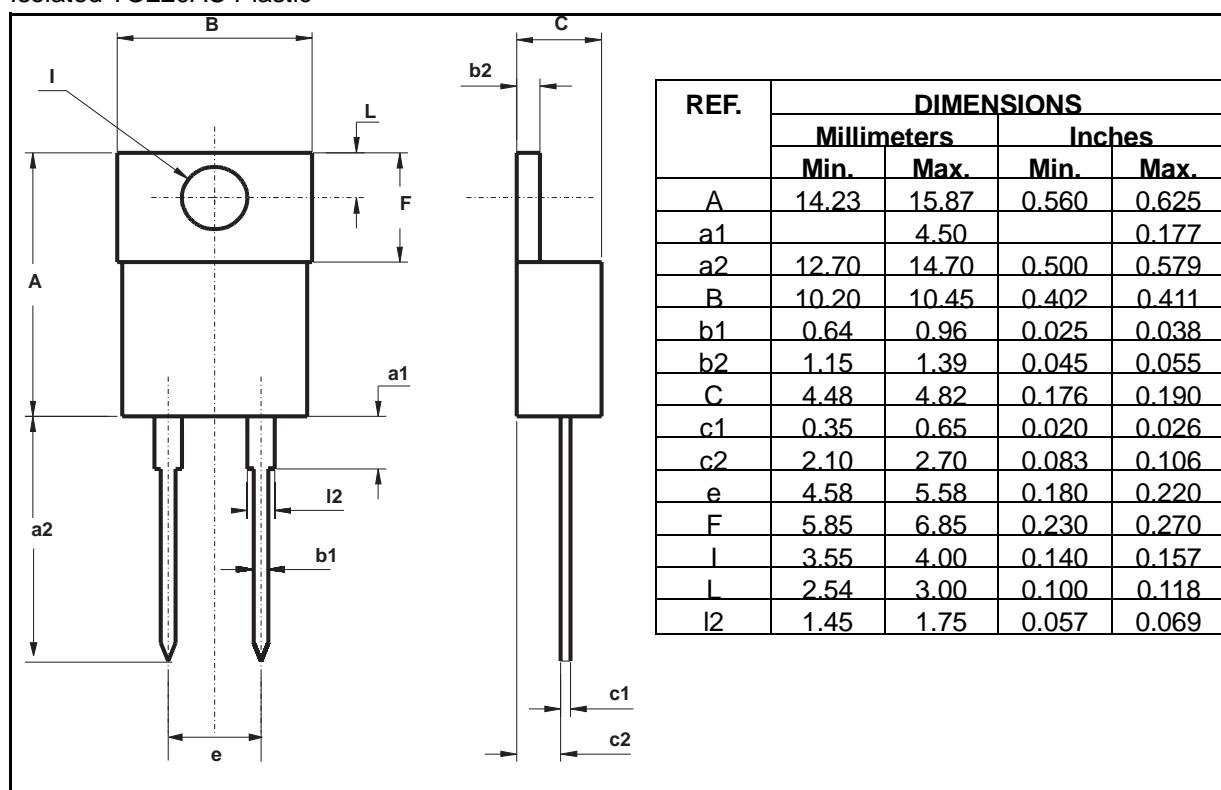

- **Marking:** type number
- Cooling method: by conduction (method C)
- Weight : 1.86g
- Recommended torque value : 80cm. N
- Maximum torque value : 100cm. N

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1998 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - France - Germany - Italy - Japan - Korea - Malaysia - Malta - Mexico - Morocco -  
The Netherlands - Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

