



**CML 4 Series — Indicator Lights**

**5**  
Indicator  
Products

**C O N F I G U R A T I O N**

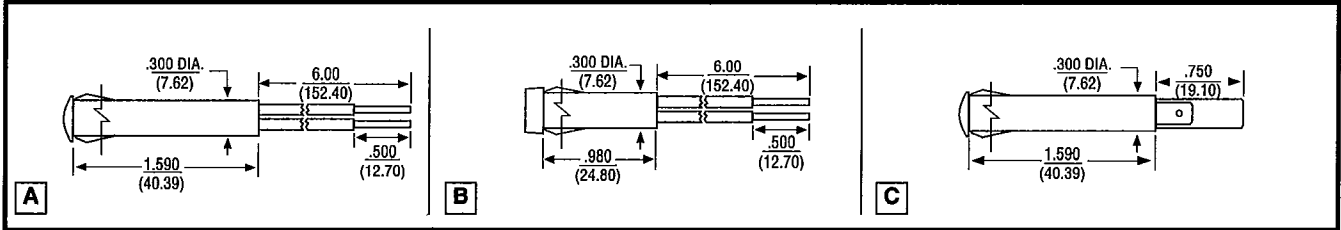

**L E N S S T Y L E**

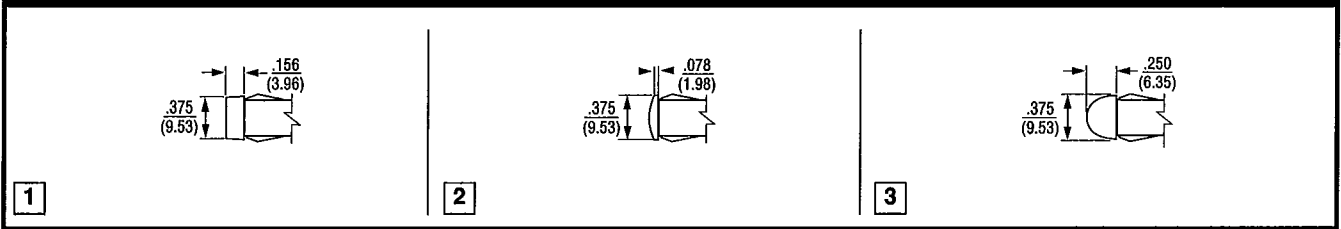

**How To Order:**

**4 B 3 A N 5**

Series	Configuration	Lens Style	Lens Color	Lens Type	Lamp Type
4	<b>A</b> (Standard Body w/ 6" Wire Leads) <b>B</b> (Short Body w/ 6" Wire Leads) <b>C</b> (Standard Body w/.187" Quick Connect Terminals)	<b>1</b> (Cylindrical Flat Top) <b>2</b> (Semi Dome) <b>3</b> (Full Dome)	<b>A</b> (Amber) <b>B</b> (Blue) <b>C</b> (Clear) <b>G</b> (Green) <b>R</b> (Red)	<b>N*</b> (Non-Diffused, Transparent)	1 (6.3V Incandescent)
					2 (14V Incandescent)
					3 (28V Incandescent)
					4 (125V Neon)*
					5 (250V Neon)*
					6G (2V Green LED)
					6R (2V Red LED)
					6Y (2V Yellow LED)
					7G (6V Green LED)
					7R (6V Red LED)
7Y (6V Yellow LED)					
8G (14V Green LED)					
8R (14V Red LED)					
8Y (14V Yellow LED)					
9G (28V Green LED)					
9R (28V Red LED)					
9Y (28V Yellow LED)					

\* Recommended for LEDs and Neon lamps

\* CML will utilize green and blue Neon lamps where appropriate

**Mounting Information:**

- All Chicago Miniature Lamp 4 Series indicator lights snapfit into a 0.312 (7.9mm) mounting hole.
- No additional hardware is required.
- Panel thickness may range from 0.025 (0.64mm) minimum to 0.060 (1.5mm) maximum.
- Maximum panel depth required is as follows:  
 Configuration A = 1.00 (25.4mm)  
 Configuration B = 2.00 (50.8mm)  
 Configuration C = 2.70 (68.6mm)

**Materials:**

- All configurations of the CML 4 Series are molded entirely from high temperature Lexan.
- All wire leads are 18 AWG with 105°C black plastic insulation, except on LED versions where the anode lead will be red and the cathode lead will be black.
- Quick connect terminals are brass.

**Agency Approvals:**

- All CML 4 Series indicator lights are Recognized by Underwriters Laboratories to 277V and are CSA Certified from 125V to 277V.