

**GLP16-400M**  
UHF Band

Inquiry

**Application**

for Spurious reduction

**Characteristics**


<b>GLP16-400M</b>	
Zin/Zout	50 ohm Nominal
Pass Band	360 up to 400MHz
Insertion Loss	0.7dB max (360 up to 400MHz)
V.S.W.R	1.5 max (360 up to 400MHz)
Attenuation	30 dB min (at 2f : 720 up to 800MHz) 25 dB min (at 3f : 1080 up to 1200MHz)
Rated Power	5W (360 up to 400MHz)
Max Input Power	7W 5minutes

**Number of ordered pieces**

1000pcs/Reel

**Dimensions**

Dimension (Unit : mm)

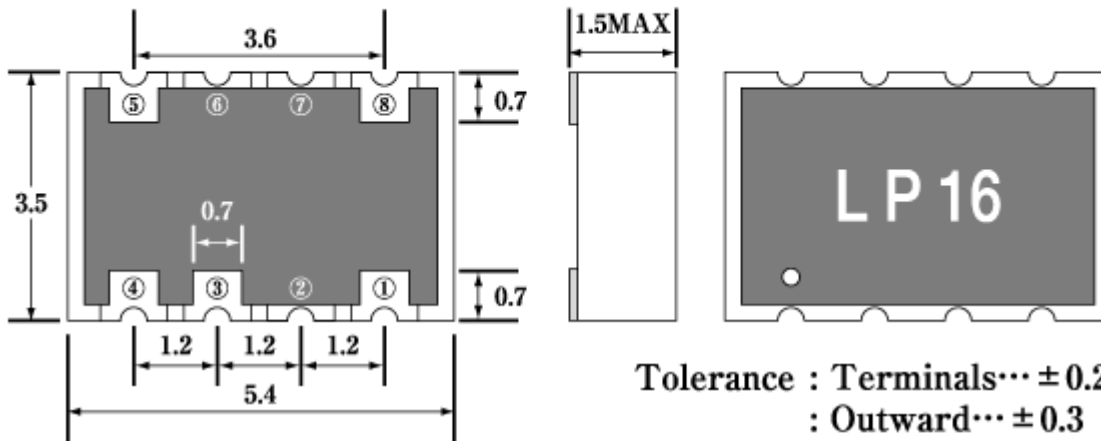

Tolerance : Terminals... ±0.2  
: Outward... ±0.3

Terminal	
①	Input
③	GND
④	Output
⑤	GND
⑧	GND

**Note**

Do not connect any wiring (inclusive of grounding) to terminals No.2,6 and No.7. They are provided solely for internal connections.

**Frequency Data**

