
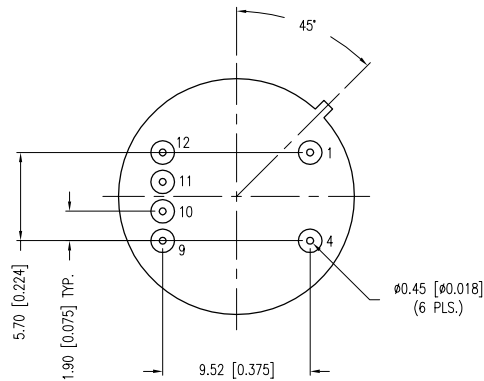
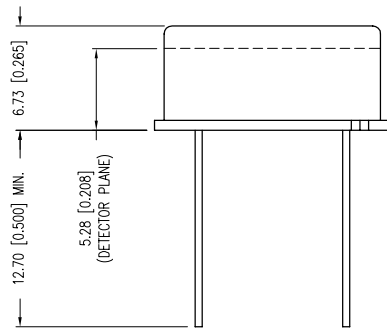



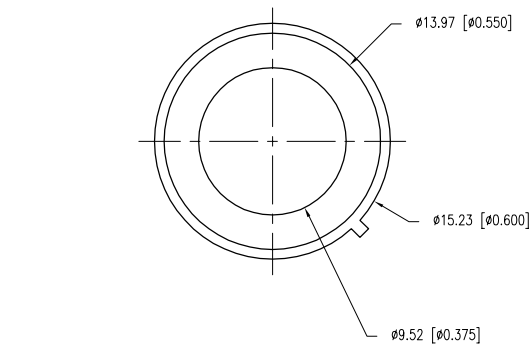

SPECIFICATIONS

STANDARD SPECIFICATIONS: ELECTRICAL
ALL DETECTOR SPECIFICATIONS ARE AT A BIAS VOLTAGE OF 25V/mm DISTANCE BETWEEN ELECTRODES APPLIED ACROSS THE DETECTOR AND WITH A LOAD RESISTOR IN SERIES. ALL SPECIFICATIONS APPLY AT OR NEAR MAXIMUM COOLING W/HEAT SINK AT +25°C.

	MIN.	TYP.	MAX.	UNITS
WAVELENGTH OF MAX. RESPONSE	4	4.2		μm
D*(500K, 1000Hz, 1Hz)	1.9x10 ⁸	3.9x10 ⁸		cm Hz ² /W
D*(1pk, 1000Hz, 1Hz)	1.4x10 ¹⁰	2.8x10 ¹⁰		cm Hz ² /W
ELEMENT RESISTANCE (DARK)	0.5	4	10	MΩ/sq.
TIME CONSTANT (NOT MEASURED)		6	12	μs
RATED ELEMENT TEMP.			85	°C
DT @/OR NEAR MAX. COOLING	45	50		°C
ELEMENT SIZE		2x2		mm
RESPONSIVITY (1pk, 650) vw-1	2.0x10 ⁴	3.0x10 ⁴		
AMBIENT TEMP./DETECTOR OPER. TEMP.		25		°C
DETECTOR OPER. TEMP.		-25		°C

PIN FUNCTION TABLE

PIN NO.	FUNCTION	COLOR
1	COOLER (-)	BLACK
4	COOLER (+)	RED
9	DETECTOR	WHITE
10	THERMISTOR	YELLOW
11	THERMISTOR	YELLOW
12	DETECTOR	WHITE

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+DECIMAL PRECISION}_{-0.00} MAX= ^{+0.00}_{-DECIMAL PRECISION}

UNCONTROLLED DOCUMENT



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

COOLED PbSe 2x2

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	02.11.11	DRAWN BY:	AB
PAGE:	1 OF 1	CHKD BY:	KF
SCALE:	NTS	APRVD BY:	BC
UNIT:	mm [INCH]		Ⓟ