TOSHIBA

TOSHIBA TRANSISTOR SILICON NPN TRIPLE DIFFUSED MESA TYPE


2SC5857

HORIZONTAL DEFLECTION OUTPUT FOR HDTV, DIGITAL TV, PROJECTION TV

- High Voltage : V_{CBO} = 1700 V
- Low Saturation Voltage : V_{CE} (sat) = 1.5 V (max)
- High Speed : $t_{f(2)} = 0.1 \ \mu s \ (typ.)$

MAXIMUM RATINGS (Tc = 25°C)

CHARACTER	RISTIC	SYMBOL	RATING	UNIT	
Collector-Base Voltage		V _{CBO}	1700	V	
Collector-Emitter Voltage		V _{CEO}	750	V	
Emitter-Base Voltage		V _{EBO}	5	V	
Collector Current	DC	Ι _C	21	A	
	Pulse	I _{CP}	42		
Base Current		Ι _Β	10.5	A	
Collector Power Dissipation		PC	75	W	
Junction Temperature		Тј	150	°C	
Storage Temperature Range		T _{stg}	-55~150	°C	

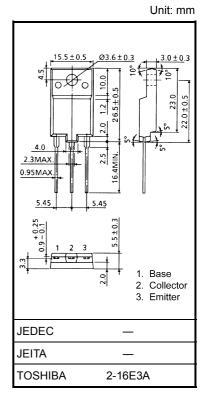

ELECTRICAL CHARACTERISTICS (Tc = 25°C)


Weight: 5.5 g (typ.)


CHARACTERISTIC		SYMBOL	TEST CONDITION	Min	Тур.	Max	UNIT
Collector Cut-off Current		I _{CBO}	V _{CB} = 1700 V, I _E = 0	_	—	1	mA
Emitter Cut-off Current		I _{EBO}	V _{EB} = 5 V, I _C = 0	_	—	100	μA
Collector - Emitter Breakdown Voltage		V (BR) CEO	I _C = 10 mA, I _B = 0	750	_	_	V
DC Current Gain		h _{FE (1)}	V _{CE} = 5 V, I _C = 2 A	30	—	60	_
		h _{FE (2)}	V _{CE} = 5 V, I _C = 8 A	11	—	19	
		h _{FE (3)}	V _{CE} = 5 V, I _C = 17 A	5	—	7.5	
Collector-Emitter Saturation Voltage		V _{CE (sat)}	I _C = 17 A, I _B = 4.25 A	-	_	1.5	V
Base-Emitter Saturation Voltage		V _{BE (sat)}	I _C = 17 A, I _B = 4.25 A		1.0	1.5	V
Transition Frequency		f _T	V _{CE} = 10 V, I _C = 0.1 A	-	2	—	MHz
Collector Output Capacitance		C _{ob}	V _{CB} = 10 V, I _E = 0, f = 1 MHz		280	—	pF
Switching Time	Storage Time	t _{stg(1)}	I _{CP} = 9 A , I _{B1} (end) = 1.4 A	_	4.5	—	μs
	Fall Time	t _{f(1)}	$f_H = 32 \text{ kHz}$	—	0.1	_	
	Storage Time	t _{stg(2)}	I _{CP} = 8 A, I _{B1} (end) = 1.2 A	_	3.5	_	μs
	Fall Time	t _{f(2)}	f _H = 45 kHz	—	0.1	-	

2004-5-18

<u>TOSHIBA</u>


20






 $I_{\rm C} - V_{\rm CE}$


4.0






2

TOSHIBA

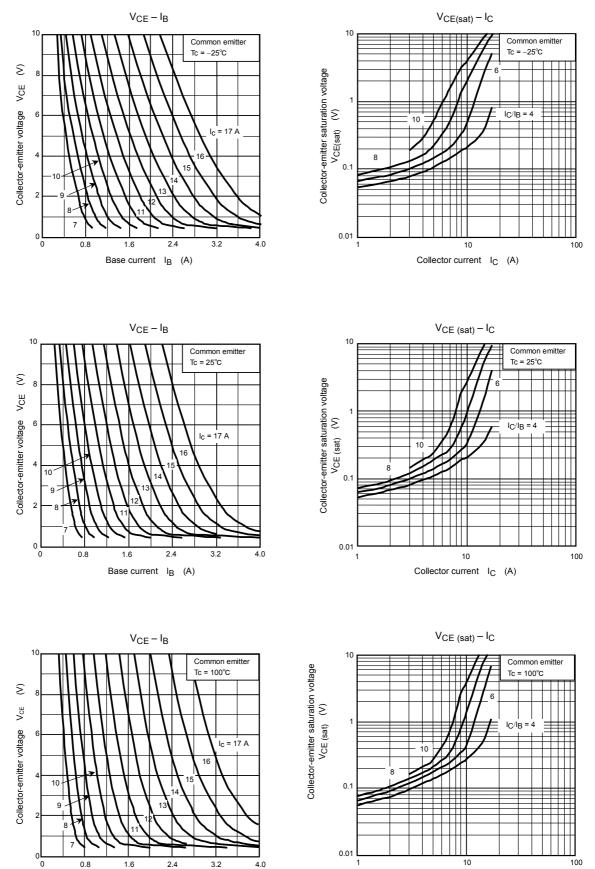


Base current IC (A)


TOSHIBA

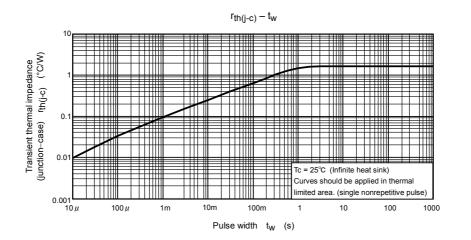






Reverse Bias - Safe Operating Area





RESTRICTIONS ON PRODUCT USE

030619EAA

- The information contained herein is subject to change without notice.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of TOSHIBA or others.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property.
 In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and

set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..

- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- TOSHIBA products should not be embedded to the downstream products which are prohibited to be produced and sold, under any law and regulations.